


GIOCO INDIRECT



Housing: Aluminum profile, integrated acrylic cover.
Design: SATTLER, THEOPHIL EICHLER

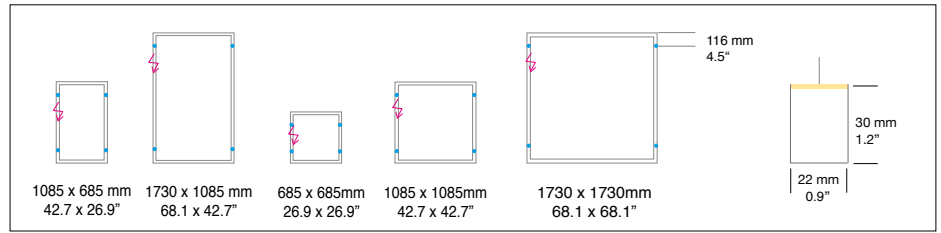


	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	weight ² kg / lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	1085 x 685 x 30	42.7 x 26.9 x 1.2"	63	3.480	2.8 / 6.17	1560.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	1730 x 1085 x 30	68.1 x 42.7 x 1.2"	102	5.570	4.2 / 9.25	1561.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	685 x 685 x 30	26.9 x 26.9 x 1.2"	47	2.720	2.2 / 4.85	1562.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	1085 x 1085 x 30	42.7 x 42.7 x 1.2"	78	4.270	3.4 / 7.49	1563.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	1730 x 1730 x 30	68.1 x 68.1 x 1.2"	125	6.870	5.2 / 11.46	1564.	X X X.	X X X.	X X X.	X X X.	X X X.	X
LED 24V CRI > 90		Standard	Warm-white	3000 K	X X X.	30.	X X X.	X X X.	X X X.	X X X.	X	
		Optional	Neutral-white	4000 K	X X X.	40.	X X X.	X X X.	X X X.	X X X.	X	
			Extra warm-white	2700 K	X X X.	27.	X X X.	X X X.	X X X.	X X X.	X	
			Tunable white*	2700 - 6500 K	X X X.	80.	X X X.	X X X.	X X X.	X X X.	X	
*(Only in combination with dimming DMX, CASAMBI Approx. 25% less power consumption.)												
Dimming		Standard	Dimmable 0 - 10 V	X X X.	X X X.	51.	00.	X X X.	X X X.	X		
		Optional	DMX	X X X.	X X X.	31.	00.	X X X.	X X X.	X		
			Dimmable CASAMBI Bluetooth 4.0 remote control through app.	X X X.	X X X.	81.	00.	X X X.	X X X.	X		
Finishes		Standard	66 bronze anodized brushed	Optional	62 black anodized brushed	X X X.	X X X.	X X X.	X X X.	.	X X X.	X
			65 champ. gold anodized brushed		60 silver anodized brushed							
Power Supply Cable Standard		Separate power cable not required		000 steel current-carrying suspension cables	X X X.	X X X.	X X X.	X X X.	.	.	.	X
		Standard (for mounting versions A, B, E):		Z 78 silver								

GIOCO INDIRECT


Housing: Aluminum profile, integrated acrylic cover.
Design: SATTLER, THEOPHIL EICHLER

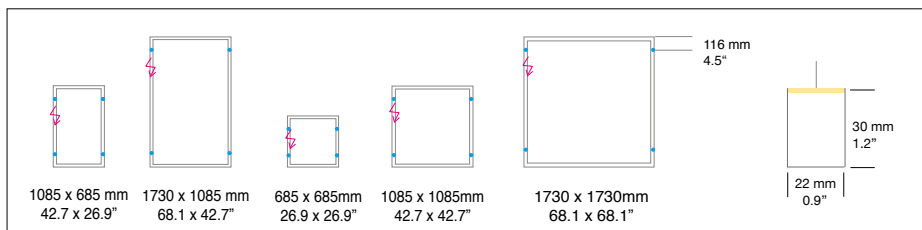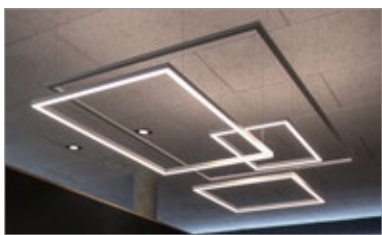


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy



Suspension through canopy



4 current-carrying steel cables



Suspension with current-carrying steel cables and cavity wall box. B

Mounting Version F + R not possible in combination with tunable white

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, R = Distance of external power supply unit to light fixture max. 10m / 394"

E, F = Minimum suspension height is half of the longest side

Including steel cable suspension 3000mm/118"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of technical unit

Type	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm 14.2 x 5.9 x 3.3"	A, G, R

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dimensions of canopy

Type	Size mm / inch	For use with Mounting Version
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3" size 685 x 685 mm	B, E, F, H
DB 290	Ø 290 / 260 / 60 mm / 11.4 / 10.2 / 2.3" size 1085 x 685 and 1085 x 1085 mm	
DB 350	Ø 350 / 320 / 60 mm / 13.7 / 12.5 / 2.3" size 1730 x 1085 and 1730 x 1730 mm	

Optional




CASAMBI wall-switch

207. 00. 00. 00. 11 (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Ceiling fixation for mounting version A (if requested)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Consisting of a cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.