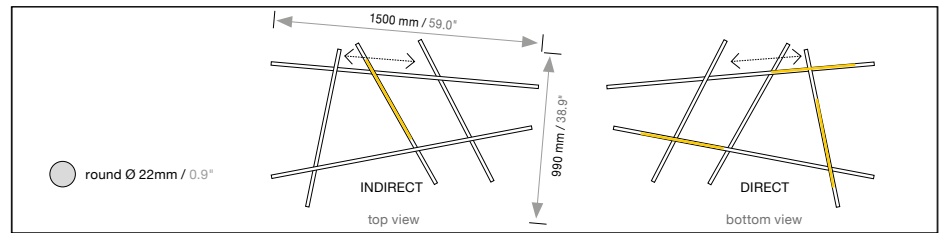












# PALITO

## MIKADO

Housing: Pendant light, solid Aluminum housing  
Design: Ulrich Sattler | Michael Schmidt, Code2design



Size: L / W / H mm		Inches		LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version			
SIZE		1500 x 990 x 190 mm / 59.0 x 38.9 x 7.4"					58	7040	3.5 / 7.7	1543.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white		3000 K			x x x .	30.	x x .	30.	x x .	x x x .	x			
		Optional: Neutral-white Extra warm-white		4000 K 2700 K			x x x . x x x .	40. 27.	x x . x x .	40. 27.	x x . x x .	x x x . x x x .	x x			
Dimming			Standard: 0 - 10 V				x x x .	x x .	51.	x x .	x x .	x x x .	x			
			Optional: Lutron EcoSystem* DMX *only mounting version A and R				x x x . x x x .	x x . x x .	91. 31.	x x . x x .	x x . x x .	x x x . x x x .	x x			
Finish																
Standard:		66 bronze anodized brushed	Optional: 60 silver anodized brushed		62 black anodized brushed	65 champ. gold anodized brushed	x x x .	x x .	x x .	x x .	.	x x x .	x			
Power supply cable			Current carrying steel cables No power supply			Standard:  Optional:	x x x . x x x .	x x . x x .	x x . x x .	x x . x x .	x x . x x .	000. Z80.	x x			
					Z 80 black matte, Mounting version A,B,E											


4-point suspension with external power supply unit in suspended ceiling.	4-point suspension with external power supply unit in separate canopy.	Suspension through canopy.	4 current-carrying steel cables.	Suspension with current-carrying steel cables and cavity wall box.	Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.
<b>A, B</b> = Distance of external power supply unit to light fixture max. 10m / 394". <b>E, F, K</b> = Minimum suspension height 0,5m, including steel cable suspension 3000 mm / 118"					
x x x .	x x .	x x .	x x .	x x .	x x x .

		<b>Canopy</b> Color: 12 white, similar RAL 9003
Type	Size mm / inch Ø cover plate / body	Included with Mounting version
<b>DB 290</b>	Ø 290 / 260 mm / 11.4 x 10.2"	<b>B, E, F</b>
		<b>External power supply units</b>
Type	Size mm / inch L W H	Included with Mounting version
<b>DE 1F</b>	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A, R, K</b>
		<b>DB 145</b> Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2" <b>K IP 20</b>

<b>1543.</b>	x x .	x x .	x x .	x x .	x x x .	x
--------------	-------	-------	-------	-------	---------	---

Complete order number

### Optional



**Ceiling fixation included with mounting version A**

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A.

**200. 00. 00. 00. 12.** (white)

Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz