




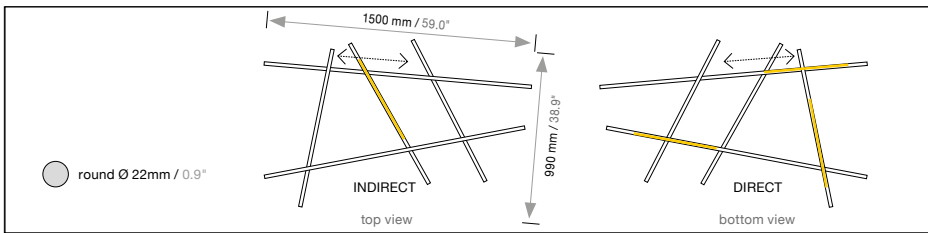


PALITO MIKADO

Housing: Pendant light, solid Aluminum housing
Design: Ulrich Sattler | Michael Schmidt, Code2design



SIZE	Size: L / W / H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
SIZE	1500 x 990 x 190 mm / 59.0 x 38.9 x 7.4"		58	7040	3.5 / 7.7	1543.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white	3000 K	x x x .	30.	x x .	30.	x x .	x x x .	x		
		Optional: Natural-white	3500 K	x x x .	35.	x x .	x x .	x x x .	x			
		Optional: Neutral-white	4000 K	x x x .	40.	x x .	x x .	x x x .	x			
Optional: Extra warm-white	2700 K	x x x .	27.	x x .	x x .	x x x .	x					
Dimming		Standard: 0 - 10 V		x x x .	x x .	51.	00.	x x .	x x x .	x		
		Optional: Lutron EcoSystem* DMX *only mounting version A and R		x x x .	x x .	91.	00.	x x .	x x x .	x		
Finish		Standard: 66 bronze anodized brushed		x x x .	x x .	x x .	x x .	<input checked="" type="checkbox"/>	x x x .	x		
		Optional: 60 silver anodized brushed										
Power supply cable		Standard:		x x x .	x x .	x x .	x x .	x x .	000.	x		
		Optional:		x x x .	x x .	x x .	x x .	x x .	Z80.	x		

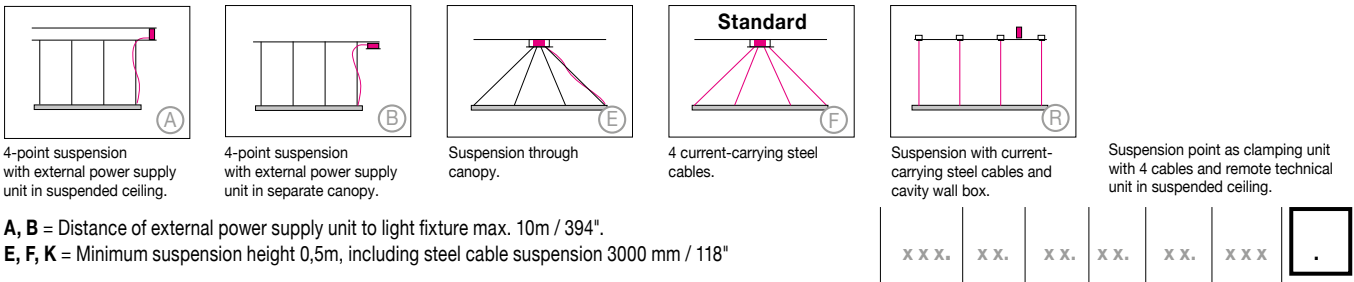

Canopy
Color: 12 white, similar RAL 9003
Type: DB 290 Ø 290 / 260 mm / 11.4 x 10.2"
Included with Mounting version B, E, F

External power supply units
Type: DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"
Included with Mounting version A, R, K

Mounting version A
Type: DB 145 Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2" K IP 20

1543.	x x .	x x .	x x .	x x .	x x x .	x
--------------	-------	-------	-------	-------	---------	---

Complete order number

Optional

Ceiling fixation included with mounting version A

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A.

200. 00. 00. 00. 12. (white)


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

PALITO MIKADO

7.2024



410 381 1497 inter-lux.com answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice



Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.