




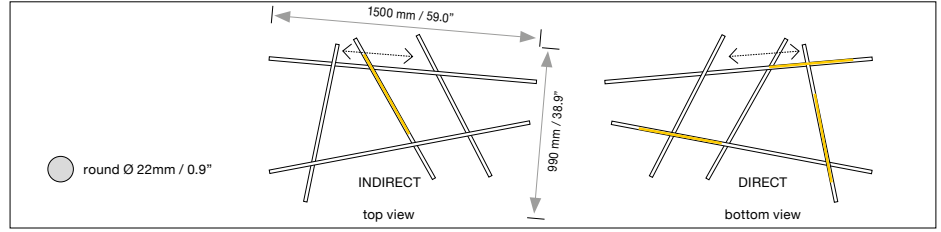







PALITO MIKADO

Housing: Pendant light, solid aluminum housing with direct and indirect light distribution
 Design: Ulrich Sattler | Michael Schmidt, Code2design




Size: L / W / H mm	Inches	LED Watt	Lumen ¹	weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
SIZE	1500 x 990 x 190	59.0 x 38.9 x 7.4"	58	7040	3.5 / 7.7	1543.	x x .	x x .	x x .	x x .	x x x .	x
LED 36V CRI > 90	 	Warm-white Neutral-white Extra warm-white	3000 K 4000 K 2700 K	(Standard) (Optional) (Optional)	x x x . x x x . x x x .	30. 40. 27.	x x . x x . x x .	30. 40. 27.	x x . x x . x x .	x x x . x x x . x x x .	x x x	
Dimming		Dimmable 0 - 10 V DMX Casambi		(Standard) (Optional) (Optional)	x x x . x x x . x x x .	x x . x x . x x .	51. 31. 81.	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x	
Finishes	 (Standard) 66 brushed anodized bronze	(Optional)	 60 silver anodized brushed	 62 brushed anodized black	 65 brushed anodized champ. gold	x x x .	x x .	x x .	x x .	<input type="checkbox"/>	x x x .	x
Power Supply Cable	 Separate power cable not required 000 Mounting Version F,R,K	steel current-carrying suspension cables	 Z 78 silver, Mounting Version B	(Standard) (Optional)	x x x . x x x .	x x . x x .	x x . x x .	x x . x x .	x x . x x .	000. Z78.	x x	


Mounting Version




4-point suspension (5m/197" max.) with drivers in offset surface mounted canopy, separate power cable. (Up to Ø 2600mm/102")





Drivers in center surface mounted canopy 3), current-carrying suspension cables.



3-point straight suspension (197" max.) with remote mounted drivers, current-carrying suspension cables.



Suspension point as clamping unit with 3 cables and remote technical unit in suspended ceiling.

Dimensions of canopy		For use with	
Type	Size mm / inch	Mounting Version	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	B, F white	
			
Driver enclosure dimensions (1 row of LED)		For use with	
Type	Size mm / inch	Mounting Version	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	R, K white	
			

x x x .	x x .	x x .	x x .	x x .	x x x .	<input type="checkbox"/>
---------	-------	-------	-------	-------	---------	--------------------------

1543.	x x .	x x .	00.	x x .	x x x .	x
--------------	-------	-------	------------	-------	---------	---

Complete order number

Input voltage for all drivers is **120 / 277 VAC 50/60 Hz**