


GIOCO DIRECT


Housing: Aluminum profile, integrated acrylic cover. Optional acoustic absorber.
 Design: SATTLER, THEOPHIL EICHLER

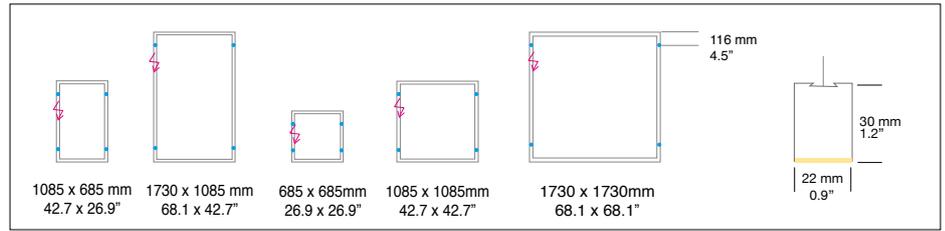


	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	1085 x 685 x 30	42.7 x 26.9 x 1.2"	63	3.480	2.8 / 6.17	1550.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	1730 x 1085 x 30	68.1 x 42.7 x 1.2"	102	5.570	4.2 / 9.25	1551.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	685 x 685 x 30	26.9 x 26.9 x 1.2"	47	2.720	2.2 / 4.85	1552.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	1085 x 1085 x 30	42.7 x 42.7 x 1.2"	78	4.270	3.4 / 7.49	1553.	X X X.	X X X.	X X X.	X X X.	X X X.	X
	1730 x 1730 x 30	68.1 x 68.1 x 1.2"	125	6.870	5.2 / 11.46	1554.	X X X.	X X X.	X X X.	X X X.	X X X.	X
LED 24V CRI > 90		Standard	Warm-white	3000 K	X X X.	30.	X X X.	X X X.	X X X.	X X X.	X	
		Optional	Neutral-white	4000 K	X X X.	40.	X X X.	X X X.	X X X.	X X X.	X	
			Extra warm-white	2700 K	X X X.	27.	X X X.	X X X.	X X X.	X X X.	X	
			Tunable white*	2700 - 6500 K	X X X.	80.	X X X.	X X X.	X X X.	X X X.	X	
*(Only in combination with dimming DMX, CASAMBI Approx. 25% less power consumption.)												
Dimming		Standard	Dimmable 0 - 10 V	X X X.	X X X.	51.	00.	X X X.	X X X.	X		
		Optional	DMX	X X X.	X X X.	31.	00.	X X X.	X X X.	X		
			Dimmable CASAMBI Bluetooth 4.0 remote control through app.	X X X.	X X X.	81.	00.	X X X.	X X X.	X		
Finishes		Standard	66 bronze anodized brushed	Optional	62 black anodized brushed	X X X.	X X X.	X X X.	X X X.	.	X X X.	X
			65 champ. gold anodized brushed		60 silver anodized brushed							
Power Supply Cable		Standard	000 steel current-carrying suspension cables									
		Standard (for mounting versions A, B, E, G, H):	Z 78 silver			X X X.	X X X.	X X X.	X X X.	.	.	X

GIOCO DIRECT


Housing: Aluminum profile, integrated acrylic cover. Optional acoustic absorber.
Design: SATTLER, THEOPHIL EICHLER

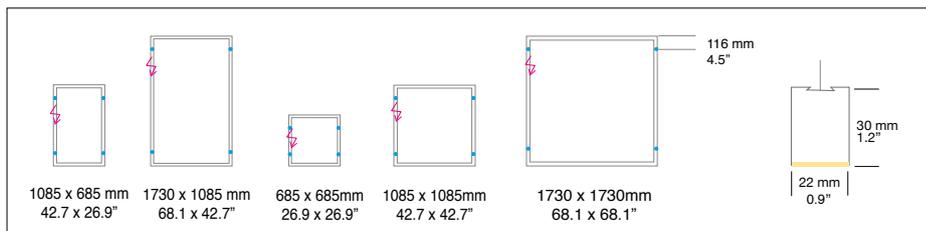


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




Suspension through canopy




4 current-carrying steel cables



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension with current-carrying steel cables and cavity wall box. B

Mounting Version F + R not possible in combination with tunable white

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X X	X				
--------	------	------	------	------	-------	---

Complete order number

Dimensions of technical unit

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm 14.2 x 5.9 x 3.3"	A, G, R

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dimensions of canopy

Typ	Size mm / inch	For use with Mounting Version
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3" size 685 x 685 mm	B, E, F, H
DB 290	Ø 290 / 260 / 60 mm / 11.4 / 10.2 / 2.3" size 1085 x 685 and 1085 x 1085 mm	
DB 350	Ø 350 / 320 / 60 mm / 13.7 / 12.5 / 2.3" size 1730 x 1085 and 1730 x 1730 mm	

Optional




CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene, an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

207. 00. 00. 00. 11 (white)

207. 00. 00. 00. 10 (black)



Ceiling fixation for mounting version A, G

Ceiling opening for power supply cable. Consists of a cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11 (white)



ACOUSTIC-SET

The ACOUSTIC SET with a highly effective sound absorber can be added to existing GIOCO luminaires at any time. Sound absorption coefficient α_w 0.9 (Tested according to DIN EN ISO 11654)

1085 x 685 mm 42.7 x 26.9"
1730 x 1085 mm 68.1 x 42.7"
685 x 685 mm 42.7 x 26.9"
1085 x 1085 mm 42.7 x 42.7"

301. 00. 00. 00. 90 (light grey) 91 (dark grey)
302. 00. 00. 00. 90 (light grey) 91 (dark grey)
303. 00. 00. 00. 90 (light grey) 91 (dark grey)
304. 00. 00. 00. 90 (light grey) 91 (dark grey)