


PALITO


Housing: Pendant light, aluminum housing

Design: Ulrich Sattler | Michael Schmidt, Code2design



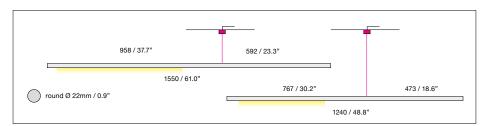

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
SIZE	Ø 22 / L 1240	Ø 0.9 / L 48.8"	15	1760	1.4 / 3.1	1541.	x x.	x x.	x x.	x x.	x x x.	Х
	Ø 22 / L 1550	Ø 0.9 / L 61.0"	22	2640	2 / 4.4	1542.	x x.	x x.	x x.	x x.	x x x.	Х
LED		Warm-white		3000 K	(Standard)	XXX.	30.	x x.	x x.	x x.	x x x.	Х
36V CRI > 90	(LED)	Neutral-white		4000 K	(-1/	xxx.	40. 27.	XX.	XX.	XX.	XXX.	Х
OI II > 30	54°	Extra warm-whit	ie	2700 K	(Optional)	xxx.	21.	X X.	X X.	X X.	XXX.	Х
Dimming		Without Dimmer	•		(Standard)	x x x.	x x.	01.	00.	x x.	x x x.	х
Finishes Standard	Optional 66 brushed anodized bronze	22 62 brushed aluminum anodize black	d anodiz			xxx.	x x.	x x.	x x.		x x x.	х
Power Supply Cable (Standard)	Z 80					xxx.	x x.	x x.	x x.	x x.	Z80.	x
Mounting	Black F		R									
Version	Height adjustab canopy Standar 1-point straight suspension (2000 mm / 78.7" max.) with integral driver in canopy DB90.	1-point straight susp (2000 mm / 78.7" ma	Ø 6 pension ax.) with DA80	eiling cutout 68 mm / 2.7" canopy		x x x. x x x.	x x.	x x. x x.	x x.	x x. x x.	x x x. x x x.	F R
	Dimonsions	.				I		I	1	1	<u> </u>	

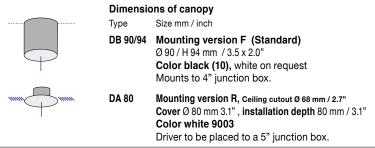

00. Z80. 01. XX.

Complete order number

Input voltage for all external power supply units and canopy is $\,120\,/\,277\,\,VAC\,\,50/60\,\,Hz$



Luminaire can be tilted to the desired position by adjusting the counterweight knurled-screw.











PALITO

Technical data is subject to change. Errors and omissions excepted 'Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.