
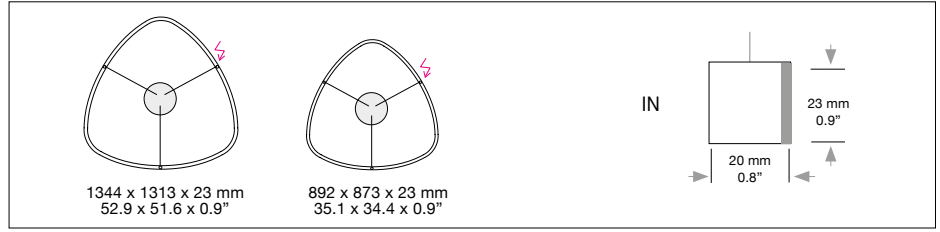


SLIM DELTA

IN

Housing: Aluminum profile with integrated opal diffuser inwards
 Design: SATTLER

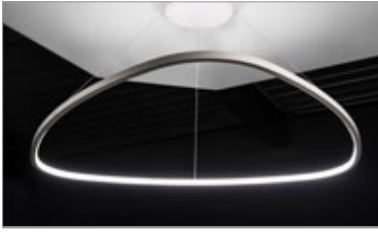

	Size: L x W x H mm	inches	LED Watt	Lumen ¹	weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	1344 x 1313 x 23	52.9 x 51.6 x 0.9"	88	3.597	5.5 / 12.1	1576.	X X.	X X.	X X.	X X.	X X X.	X	
	892 x 873 x 23	35.1 x 34.4 x 0.9"	50	2.574	2.8 / 6.1	1578.	X X.	X X.	X X.	X X.	X X X.	X	
LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X		
		Neutral-white	4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X		
		Extra warm-white	2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X		
		Ultra warm-white	2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X		
		Tunable white**	2700 - 6500 K	(Optional)	X X X.	80.	X X.	X X.	X X.	X X X.	X		
** (available with DMX or Casambi dimming only)													
Dimming		Dimmable 0 - 10 V	(Standard)	X X X.	X X.	51.	X X.	X X.	X X.	X X X.	X		
		DMX	(Optional)	X X X.	X X.	31.	X X.	X X.	X X.	X X X.	X		
		CASAMBI	(Optional)	X X X.	X X.	81.	X X.	X X.	X X.	X X X.	X		
Finishes		Optional (Powder coated):	10 black fine textured	30 anthracite	32 crocodile black	33 sand silver fine textured	34 bronze satined						
		35 gold	36 brass	37 bronze fine textured	38 copper								
Standard		Optional (Premium):	22 aluminum polished	27 brush-finished aluminum	XX Custom finish								
		X X X.	X X.	X X.	X X.	.	X X X.	X					
Power Supply Cable	Standard (mounting versions F, K, R, T)	000 Steel current-carrying suspension cables (separate power cable not required)	Standard (mounting versions A, B, E, G, S)	Z 70 Silver									
		Optional (mounting versions A, B, E, G, S)	Z 71 white	Z 72 grey	Z 73 black	Z 74 orange	Z 75 red	Z 76 green	X X X.	X X.	X X.	X X.	X X.

SLIM DELTA IN

SATTLER

410 381 1497 answers@inter-lux.com
 inter-lux reserves the right to make technical changes without notice

IP 20 Canopy B, E, F, S, T
IP 52 A, R, G, K

Light distribution direct



Conforms to UL-STD 1598
 Certified to CSA-STD C22.2
 No.250.0-08

Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.


SLIM DELTA

IN


Housing: Aluminum profile with integrated opal diffuser downwards
Design: SATTLER

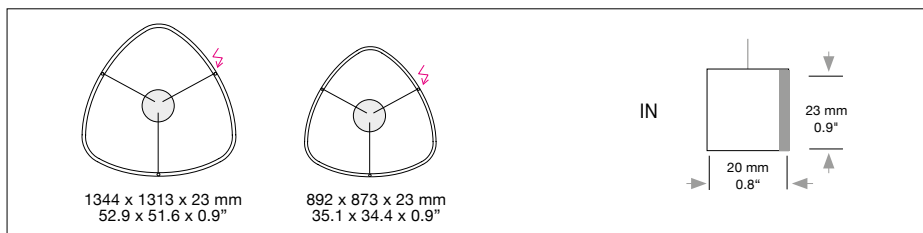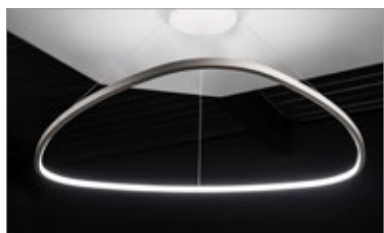


Mounting Version




3-point suspension (5m/197" max.) with drivers in offset surface mounted canopy, separate power cable. (Up to Ø 2600mm/102")




Drivers in center surface mounted canopy (3), current-carrying suspension cables. (Up to Ø 1800mm/71")^{4,5}




3-point straight suspension (197" max.) with remote mounted drivers, current-carrying suspension cables. (Up to Ø 1800mm/71")^{4,5}




1-point suspension with drivers in pendant canopy PB 366, separate power cable from canopy down. (Up to Ø 1800mm/71")⁴
(a) Max. 5m / 196" +
(b) Max. 3m / 118"



1-point suspension with drivers in pendant canopy PB 366, current-carrying suspension cables from canopy down. (Up to Ø 1800mm/71")^{4,5}
(a) Max. 5m / 196" +
(b) Max. 3m / 118"



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 3 cables and remote technical unit in suspended ceiling.

³Mounting versions E & F = Minimum suspension height half the size of the light fixture, maximum suspension height two times the diameter of the light fixture
⁴Only available with 1 row of LED.
⁵Not in combination with RGB

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Including steel cable suspension 3000mm/118" and/or power supply cable 5000mm/197". Version S,T 5000 + 3000mm / 197"+118"

Driver enclosure dimensions (1 row of LED)

Type	Size mm / inch	Size of lamp mm / inch.	Included with Mounting Version
DE 1F	360 x 150 x 85 14.2 x 5.9 x 3.3"	up to Ø 1800 / 62.9"	G, K
DE 2F	360 x 300 x 85	up to	

Power cable cover plate
(included with mounting version A, C & G) Ceiling opening box for power supply cable (80mm / 3.1" Ø round metal cover). White powder coated finish.

Dimensions of canopy

Typ	Size mm / inch	For use with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	B, F
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	T

Input voltage for all drivers is **120 / 277 VAC 50/60 Hz**

Complete order number

--	--	--	--	--	--	--	--	--	--

Optional



CASAMBI wall-switch

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20
IP 52

Canopy B, E, F, S, T
A, R, G, K



Light distribution direct



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.