



2.4" General Downlight Flush Round Opal Diffuser



- Part of a family of 2.4" aperture matching downlights.
- General downlight with high-angle distribution provides illumination to adjacent walls.
- Very shallow depth, installed from below the finished ceiling.
- Integral or remote driver accommodate a large selection of driver and control options.
- White and silver finish as standard.
- Mounts in 1/16" to 1" surface.
- Wet Location standard for use in showers and outdoors.
- Made in the USA
- 5-year Warranty

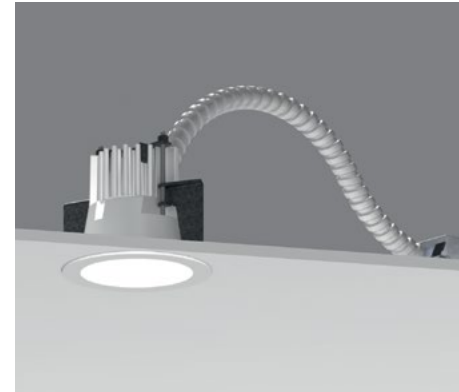

Housing	Die-caste aluminum for precision fit and heat dissipation 3/8" bezel trim compatible with installation from below into ACT, drywall and hard ceilings Quick-screw mounting mechanism EZ-Click Cover installation
Covers	Round Satin Opal Cover flush to ceiling
LED	92CRI, 60+ lumens per watt delivered Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	High angle symmetrical distribution
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

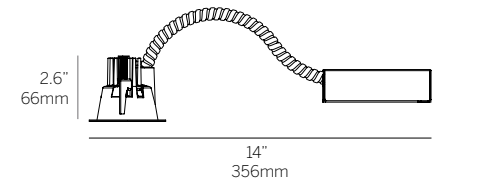

Standard housing

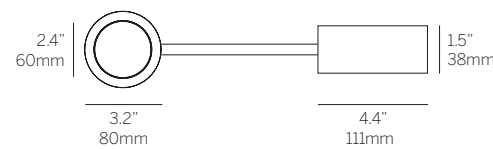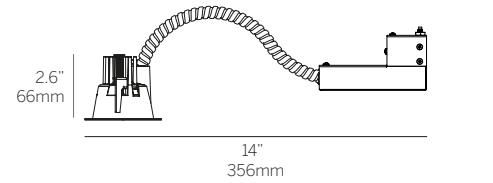

Shallow housing (SH)

technical
information

2.4" General Downlight Flush Round Opal Diffuser

Model	Fixation	Power ¹	CRI/CCT ^{2,3}	Driver ⁵	Cover	Beam	Options
WG-60RGDL	RBT	L M H	927 930 935 940	X S S010 SPH D010 PEQ1 PEQ0	FROD	W (std) S ⁵ F	CP IC NC LP SH WL

Model

- WG-60RGDL = 2.4" General Downlight Flush Round Opal Diffuser

Fixation

- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

CRI/CCT^{2,3}

- 90+ CRI (Low/Medium/High Power)
- 927 = 2700K, (416/566/747 lm)
- 930 = 3000K, (448/609/804 lm)
- 935 = 3500K, (448/609/804 lm)
- 940 = 4000K, (479/652/861 lm)

Driver⁴

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

Lens

- FROD = Flush round opal diffuser

Finish

- W = White, RAL 9010 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500⁵
- F = Custom finish (provide RAL code)

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location

Emergency Remote Only

- Emergency LED battery backup available, order separately

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Delivered lumens shown. See page 4 for additional details.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: inter-lux.com/tiger