


## 2.4" General Downlight Round Regressed Cone

- Part of a complete family of 2.4" aperture matching downlights.
- 50° Cut Off, giving good visual comfort.
- Installation from below the ceiling for remodel and new construction.
- High efficiency clear textured lens deep set into cone cover.
- Integral or remote driver.
- White finish as standard.
- Mounts in 1/16" to 1" surface.
- Wet Location as standard option (WL).
- 74° symmetrical beam spread suitable for general illumination.
- Made in the USA
- 5-year Warranty

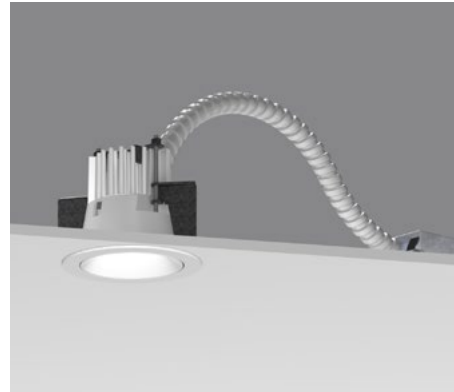

**Housing** Die-cast aluminum for precision fit and heat dissipation  
3/8" bezel trim compatible with installation from below into ACT, drywall and hard ceilings  
Quick-screw mounting mechanism  
EZ-Click Cover installation

**Covers** Recessed conical reflector with 50 degree cut-off

**LED** 92CRI, 60+ lumens per watt delivered  
Low/Mid/High output choices  
2700K, 3000K, 3500K, 4000K

**Optics** High angle symmetrical distribution



**Driver** Integral and remote drivers for all dimming and non-dimming applications  
Through-wire integral driver enclosure installed from below without the need for bulky housing

**Installation** Not required when using the Driver Enclosure



**Housing** Optional: IC and Chicago plenum  
Optional: New construction (with j-box and driver attached)  
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

**Warranty** 5-year Limited (see complete company warranty information)

**Certifications** ETL and ETL-C for dry and damp location, CE, Wet Location rated

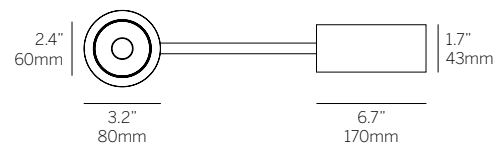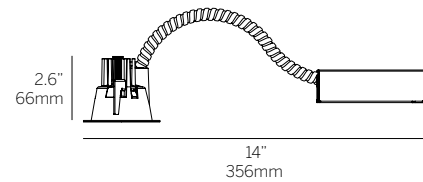

Standard housing

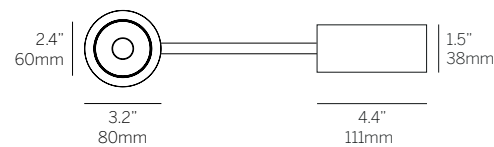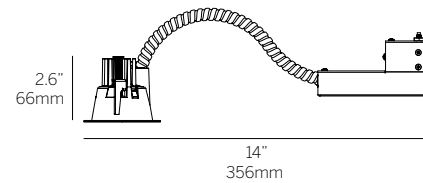

Shallow housing (SH)

technical  
information

## 2.4" General Downlight Round Regressed Cone

Model	Fixation	Power <sup>1</sup>	CRI/CCT <sup>2,3</sup>	Driver <sup>5</sup>	Lens	Trim Finish	Cone Finish	Options
WG-60RGDL	RBT	L M H	927 930 935 940	X S S010 SPH D010 PEQ1 PEQ0	RRC	W (std) S <sup>5</sup> F	W (std) S <sup>5</sup> F	CP IC NC LP SH WL

### Model

- WG-60RGDL = 2.4" General Downlight Round Regressed Cone

### Fixation

- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

### CRI/CCT<sup>2,3</sup>

- 90+ CRI (Low/Medium/High Power)
- 927 = 2700K, (399/543/717 lm)
- 930 = 3000K, (429/584/771 lm)
- 935 = 3500K, (429/584/771 lm)
- 940 = 4000K, (459/625/826 lm)

### Driver<sup>4</sup>

- X = Driver ordered separately

### Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

### Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

### Lens

- RRC = Round regressed cone

### Trim Finish

- W = White (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500<sup>5</sup>
- F = Custom finish (provide RAL code)

### Cone Finish

- W = White, RAL 9010 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500<sup>5</sup>
- F = Custom finish (provide RAL code)

### Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location
- To specify multiple options, select the appropriate grouped codes from drop-down e.g. SH-WL

### Emergency Remote Only

- Emergency LED battery backup available, order separately

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Delivered lumens shown. See photometry for additional details.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)