


2.4" General Downlight

Flush Round Opal Diffuser



WG-60RGDL-FROD-W

		Delivered Lumens			
Power	W	2700K	3000K	3500K	4000K
L	5.9	416	448	448	479
M	8.6	566	609	609	652
H	12.4	747	804	804	861

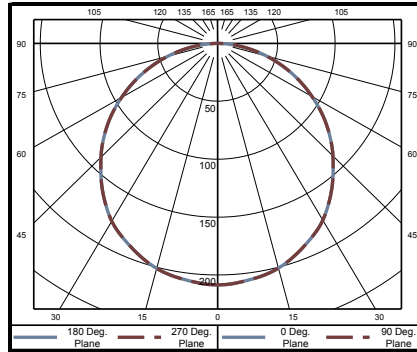

Polar Plot

Cone of Light Tabulation*		
Mounting Height (Ft)	Footcandles at Nadir	Diameter (Ft)
4	13	5.1
6	5.8	7.6
8	3.3	10.1
10	2.1	12.6
12	1.5	15.2
14	1.1	17.7
16	0.8	20.2

*Tabulation uses Mid Power / 935 LED