


2.4" General Downlight

Round Regressed Cone



WG-60RGDL-RRC-W-W

		Delivered Lumens			
Power	W	2700K	3000K	3500K	4000K
L	5.9	399	429	429	459
M	8.6	543	584	584	625
H	12.4	717	771	771	826

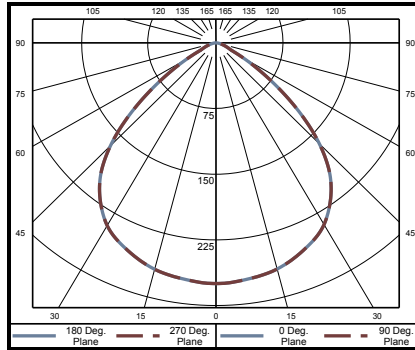

Polar Plot

Cone of Light Tabulation*		
Mounting Height (Ft)	Footcandles at Nadir	Diameter (Ft)
4	17.2	5.2
6	7.6	7.8
8	4.3	10.3
10	2.8	12.9
12	1.9	15.5
14	1.4	18.1
16	1.1	20.7

*Tabulation uses Mid Power / 935 LED