20 Linear Perimeter Flush

inter•lux

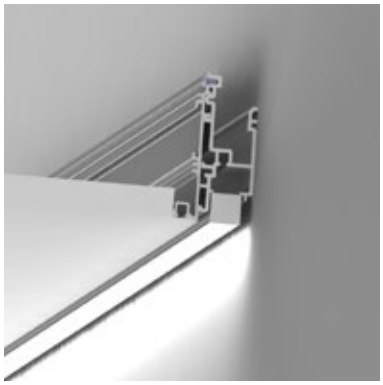

Ordering Information

WG-20LPF										
Model	**Type**[1]	**Length**	**LED**[2]	**Color**[3]	**Voltage**	**Power**[4]	**Diffuser**	**Mount**	**Finish**	**Options**
WG-20LPF	S P	A A x B A x B x C A x B x A x B	L M	80+ CRI 827 830 835 840 90+ CRI 927 930 935 940	UNV 120V	X S D010 L3DAE L3D0E DFPN	OD (std) SD	P BT RT TG	W (std) C	DL BEC FEC PEC



Trimless (P)



Bezel Trim (BT)



Return Trim (RT)



T-Grid (TG)

Luminaire
- Continuous, evenly illuminated snap-in lens flush to the ceiling plane.
- Opal Diffuser for even illumination and no LED appearance. Satin diffuser for high efficiency and minimum LED appearance.
- Field replaceable LED boards.
- 80+ CRI, 3 steps MacAdam, minimum 65 lumens per Watt delivered (Result shown for Mid Power, 3500K, Opal Diffuser).
- Lengths and angles factory cut to exact field dimensions specified to .25".
- Standard and custom corners.
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.

Type[1]
- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane

Length
- A, B, C = specify feet & inches to the nearest .25" (i.e. 6' 5.5") For patterns specify each length (i.e. 2 sided: A x B = 6' 5" x 6'; 3 sided: A x B x C; 4 sided: A x B x A x B)

LED[2]
- L = 3.2W/ft Low Power (24V)
- M = 6.4W/ft Mid Power (24V)

Color / Lumens[3]
80+ CRI minimum (Low/Mid)
- 827 = 2700K (316/534 lm/ft)
- 830 = 3000K (343/579 lm/ft)
- 835 = 3500K (343/579 lm/ft)
- 840 = 4000K (355/601 lm/ft)
- For 90+ CRI specify 927, 930, etc. Approximately 16% less lumens than 80 CRI.

Voltage
- UNV = 120-277V
- 120V = 120V (DFPN only)

Power Supply (remote)[4]
- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

Diffuser
- OD = Opal diffuser (standard)
- SD = Satin diffuser (high efficiency)

Mounting
- P = Trimless
- BT = Bezel Trim
- RT = Return Trim
- TG = T-Grid

Finish
- W = White finished trim, RAL9010 (standard)
- C = Custom finished trim, specify RAL

Options
- DL = Damp Location
- BEC = Bezel End Caps
- FEC = Flat End Caps
- PEC = Plaster-in End Caps
- To specify multiple options, select the appropriate grouped codes from the dropdown e.g. DL-BEC.

Emergency
- Emergency LED driver available, order separately.

[1] See pattern spec sheet.
[2] Wattage shown does not include power supplies/drivers.
[3] Delivered lumens with satin diffuser shown.
[4] Remote power supply required. See power supply page for details.