





# 20 Linear Perimeter Regressed

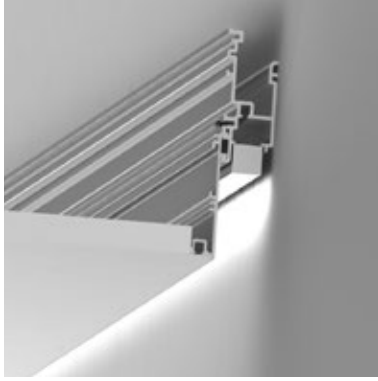


Trimless (P)



Bezel Trim (BT)



Return Trim (RT)



T-Grid (TG)

## Ordering Information

Model	Type <sup>1</sup>	Length	LED <sup>2</sup>	Color <sup>3</sup>	Voltage	Power <sup>4</sup>	Diffuser	Mount	Finish	Options
WG-20LPR	S P	A A x B A x B x C A x B x A x B	L M	80+ CRI 827 830 835 840  90+ CRI 927 930 935 940	UNV       120V	X S D010 L3DAE L3DOE  DFPN	OD (std) SD	P BT RT TG	W (std) C	DL BEC FEC PEC

### Luminaire

- Continuous, evenly illuminated snap-in lens regressed to the ceiling plane.
- Opal Diffuser for even illumination and no LED appearance. Satin diffuser for high efficiency and minimum LED appearance.
- Field replaceable LED boards.
- 80+ CRI, 3 steps MacAdam, minimum 65 lumens per Watt delivered (Result shown for Mid Power, 3500K, Opal Diffuser).
- Lengths and angles factory cut to exact field dimensions specified to .25".
- Standard and custom corners.
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.

### Type<sup>1</sup>

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane

### Length

- A, B, C = specify feet & inches to the nearest .25" (i.e. 6' 5.5") For patterns specify each length (i.e. 2 sided: A x B = 6' 5" x 6'; 3 sided: A x B x C; 4 sided: A x B x A x B)

### LED<sup>2</sup>

- L = 3.2W/ft Low Power (24V)
- M = 6.4W/ft Mid Power (24V)

### Color / Lumens<sup>3</sup>

- 80+ CRI minimum (Low/Mid)
- 827 = 2700K (316/534 lm/ft)
- 830 = 3000K (343/579 lm/ft)
- 835 = 3500K (343/579 lm/ft)
- 840 = 4000K (355/601 lm/ft)
- For 90+ CRI specify 927, 930, etc. Approximately 16% less lumens than 80 CRI.

### Voltage

- UNV = 120-277V
- 120V = 120V (DFPN only)

### Power Supply (remote)<sup>4</sup>

- X = No Driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

### Diffuser

- OD = Opal diffuser (standard)
- SD = Satin diffuser (high efficiency)

### Mounting

- P = Trimless
- BT = Bezel Trim
- RT = Return Trim
- TG = T-Grid

### Finish

- W = White finished trim, RAL9010 (standard)
- C = Custom finished trim, specify RAL

### Options

- DL = Damp Location
- BEC = Bezel End Caps
- FEC = Flat End Caps
- PEC = Plaster-in End Caps
- To specify multiple options, select the appropriate grouped codes from the dropdown e.g. DL-BEC.

### Emergency

- Emergency LED driver available, order separately.

<sup>1</sup> See pattern spec sheet.

<sup>2</sup> Wattage shown does not include power supplies/drivers.

<sup>3</sup> Delivered lumens with satin diffuser shown.

<sup>4</sup> Remote power supply required. See power supply page for details.