



# 20 Linear Perimeter Flush Lens

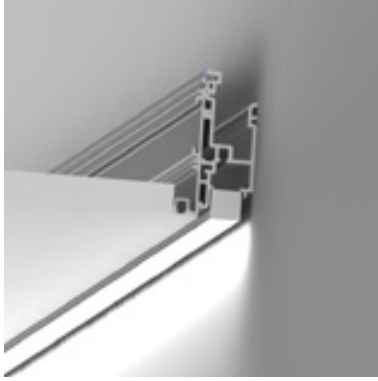


## Ordering Information


Model	Fixation	Pattern	Length	Power <sup>2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Lens	Finish	Options
WG-20LPF	RPT RBT RRT RGT9 RGT15	S PI <sup>1</sup> PO <sup>1</sup>	A A x B A x B x C A x B x A x B	L M H	927 930 935 940	X S D010 L3DAE L3DOE DFPN EL96	OD (std) SD	W (std) B S F	BEC FEC PEC




Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)



Recessed Return Trim (RRT)



Recessed Grid Trim (RGT9/RGT15)

### Luminaire

- Continuous, evenly illuminated snap-in lens flush to the ceiling plane.
- Opal Diffuser for even illumination and no LED appearance. Satin diffuser for high efficiency and minimum LED appearance.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Lengths and angles factory cut to exact field dimensions specified to 0.25".
- Standard and custom corners.
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.

### Fixation

- RPT = Recessed plaster trim
- RBT = Recessed bezel trim
- RRT = Recessed return trim
- RGT9 = Recessed grid trim 9/16"
- RGT15 = Recessed grid trim 15/16"

### Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane.<sup>1</sup>
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane.<sup>1</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>2</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft mid power (24V)
- H = 10W/ft high power (24V)

### CRI/CCT<sup>3</sup>

- 90+ CRI (low/mid/high power)
- 927 = 2700K, (169/338/591 lm/ft)
- 930 = 3000K, (184/367/642 lm/ft)
- 935 = 3500K, (218/436/763 lm/ft)
- 940 = 4000K, (259/518/907 lm/ft)

### Driver (remote)<sup>4</sup>

- X = No driver
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC
- EL96 = Osram / EldoLED, 24V, 1% 0-10V Dimming (1"x3"x23" driver enclosure)

### Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- B = Black, 15% gloss, Tiger Drylac 44/90053
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

### Options

- BEC = Bezel end caps
- FEC = Flat end caps
- PEC = Plaster-in end caps

### Emergency (remote only)

- Emergency LED driver available, order separately.


<sup>1</sup> See page 2 for corner details.

<sup>2</sup> Wattage shown does not include power supplies/drivers.



<sup>3</sup> Delivered lumens with satin opal diffuser shown.

<sup>4</sup> Remote power supply required. See power supply page for details.

## Corners

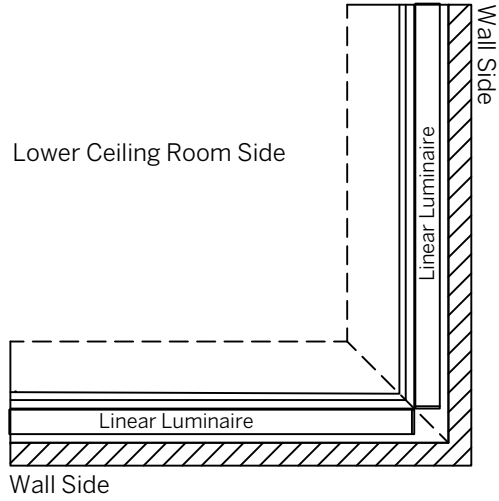

**INSIDE CORNER (PI)**

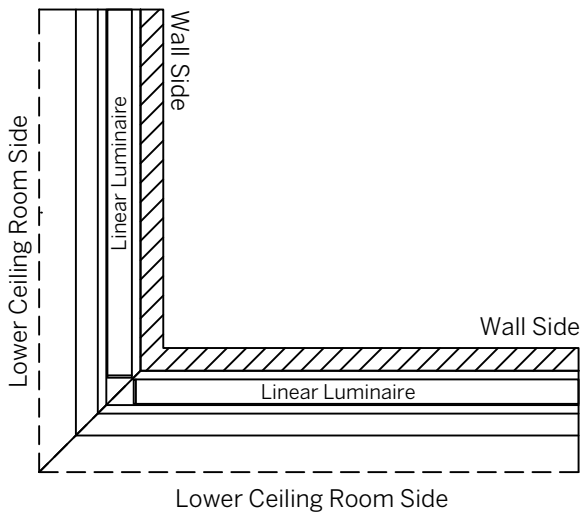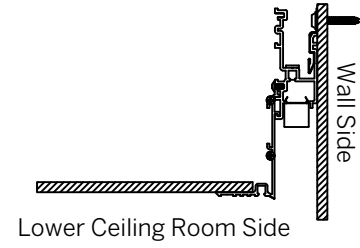

**OUTSIDE CORNER (PO)**