

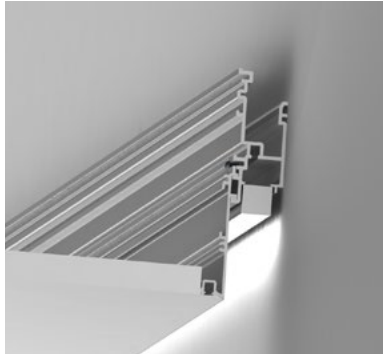


20 Linear Perimeter Regressed

Recessed Plaster Trim (RPT)

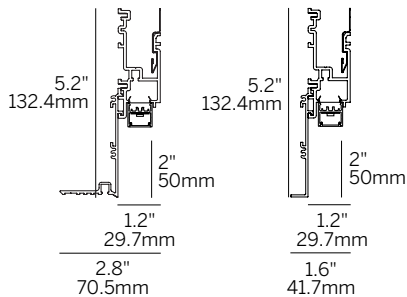


Soft Graze (SG) Recessed Plaster Trim (RPT)

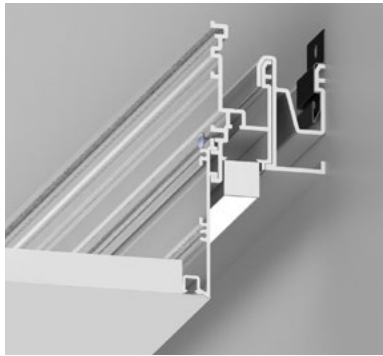

Recessed Plaster Trim (RPT)

Recessed Bezel Trim (RBT)
Recessed Grid Trim (RGT9/RGT15)

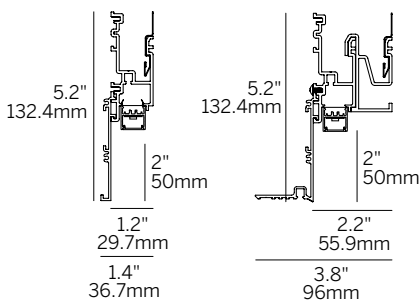

Recessed Return Trim (RRT)

Soft Graze (SG)
Recessed Plaster Trim (RPT)

Cutout Dimensions

RPT – 1.75" width / length + ¼"
RBT – 1.25" width / length + ¼"
RRT – 1.5" width / length + ¼"
(Add 1" to width for 20LPRSG)

Ordering Information

Model	Fixation	Pattern	Length	Power ²	CRI/CCT ³	Driver ⁴	Lens	Finish ⁶	Options
WG-20LPR	RPT	S	A	L	927	X	OD (std)	W (std)	BEC
WG-20LPRSG	RBT	PI ¹	A x B	M	930	S	SD	B	FEC
	RRT	PO ¹	A x B x C	H	935	D010	MPL	S	PEC
	RGT9	PZ ¹	A x B x A x B		940	L3DAE	NL16	F	EM
	RGT15				WD	L3D0E	LL45B ⁵		WL ⁷
					RGBW	EL96	LL45W ⁵		
						DMX	LL45S ⁵		

Luminaire

- Recessed perimeter mount fixture with regressed light for continuous mounting to any desired length (1/4" increments), as well as standard grid multiples.
- Multiple lens options for diffuse, high efficiency and luminous effect.
- *Soft Graze* version with 1" extension.
- Remote driver options (required). Field replaceable LED boards.
- Lengths and angles factory cut to exact field dimensions.
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.
- 90+ CRI, 3 steps MacAdam.
- L70 (TM21 Projected 85C) Static White 60,000 hours, RGBW 50,000 hours, WD 36,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed bezel trim
- RRT = Recessed return trim
- RGT9 = Recessed grid trim 9/16"
- RGT15 = Recessed grid trim 15/16"

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90°, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)
- For 2 and 4 foot fixtures to fit ceiling grids specify 24" and 48" lengths

Power²

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

Lenses/Accessories



410 381 1497 inter-lux.com answers@inter-lux.com

Inter-lux reserves the right to make technical changes without notice.

CRI/CCT (90+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White (M power only)

Driver (remote)⁴

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser
- MPL = Micro-prismatic lens
- NL16 = Linear narrow lens, 16°
- LL45B = Linear louver black⁵
- LL45W = Linear louver white⁵
- LL45S = Linear louver satin⁵

Finish⁶

- W = White, 15% gloss, RAL 9010 / Tiger Drylac 009/10120 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 049/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- BEC = Bezel end caps
- FEC = Flat end caps
- PEC = Plaster-in end caps
- EM = Emergency LED driver (remote only)
- WL = Wet Location Under Canopy / Cover⁷

- 1 See pattern spec sheet.
- 2 Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- 3 See photometric data sheet for delivered lumens.
- 4 Remote power supply required. See power supply page for details.
- 5 Louver available in 4.75" increments, straight runs only.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger
- 7 Wet Location option available for OD / SD / MPL lenses and recessed / surface ceiling applications only.

