

archicove






A lighting system with high degree of mobility, conceived for use as cove lighting. Archicove perfectly fits in narrow spaces of grooves and lateral clefts, typical in hotel facilities, museums and places of worship, offering direct lighting capable of enhancing prestigious vaults and ceilings.

Materials

Aluminum body
Polycarbonate diffuser



Archicove | Linear profiles | 24V | topLED | Driver remote | Tilttable | Asymmetric



CRI 80 - 9W

Anod. Al.	E94110	2700 K	979 lm	M	Medium Flood	30
		3000 K	1044 lm	W	Flood	60
		3500 K	1044 lm	T	General	00
		4000 K	1092 lm	N	Asymmetric	07

CRI 80 - 27W

Anod. Al.	E94115	2700 K	2925 lm	M	Medium Flood	30
		3000 K	3132 lm	W	Flood	60
		3500 K	3132 lm	T	General	00
		4000 K	3276 lm	N	Asymmetric	07

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Cables



E98879

Supply
24V DC
9.84 in
Male 2 pin
0.08 x 0.06 in²



E98878

Extension
24V DC
39.37 in
Male-Female 2 pin
0.08 x 0.06 in²

Accessories





E98699

Steel support plate
For 13.46 in

E98781

Steel support plate
For 40.24 in

Archicove RGBW | Linear profiles | 24V | topLED | Driver remote | Tilttable | Asymmetric



CRI 80 - 6.5W

Anod. Al.	E90523	RGBW natural white	Q	Medium Flood	30
		RGBW warm white	V	Flood	60
				General	00
				Asymmetric	07

CRI 80 - 19W

Anod. Al.	E90524	RGBW natural white	Q	Medium Flood	30
		RGBW warm white	V	Flood	60
				General	00
				Asymmetric	07

Power supply options (remote only)

EL96-DMX

LED Driver 96W, 24VDC, 120-277VAC, +EldoLED
LINEARdrive LIN100D2 DMX/Sequencer Interface for
RGB fixtures, remote mounted, supplied in a Dry Location
Enclosure. DMX Control not included/order separately.

Cables



E98715
Supply
24V DC
9.84 in
Male 2 pin
0.08 x 0.06 in²



E98718
Extension
24V DC
39.37 in
Male-Female 2 pin
0.08 x 0.06 in²



E98878
DMX
direction wire



E98988
DMX sealing
adaptor

Accessories



E98699
Steel support plate
For 13.46 in




E98781
Steel support plate
For 40.24 in



Equipment equipped with male and female connectors, conceived for quick installation of a continuous row.



Precise light beam adjustment option by setting the rotation angle of the LED profile.

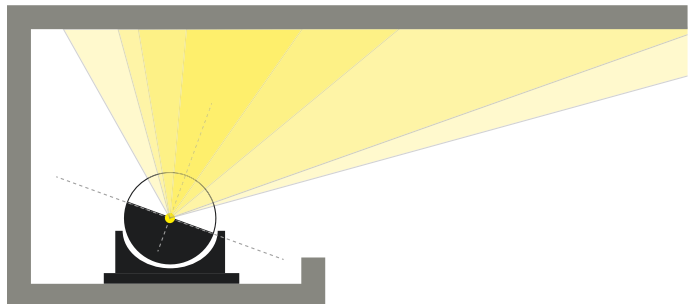

The extensive variety of optics offers a wide choice of solutions. Above all, it allows to redefine the cove lighting concept: not only softly diffused indirect light, but also a tool to be used to enhance the architecture with more or less narrow dimensions.