


Epitax\_J | Downlight | powerLED | Damp Location | Driver remote | Adjustable | 8W 700mA

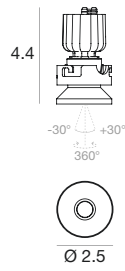

Balance - CRI 92

White	<b>E80644</b>	2700 K	689 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80645</b>	3000 K	738 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80758</b>	3500 K	738 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	796 lm	<b>N</b>		

Efficiency - CRI 80

White	<b>E80642</b>	2700 K	854 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80643</b>	3000 K	854 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80757</b>	3500 K	854 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	922 lm	<b>N</b>		

Power supply options (remote only)

**ECO30W-700**

0-10V EldoLED ECOdrive  
30W for 1-3 fixtures



**SOLO50W-700**

0-10V EldoLED SOLOdrive  
50W for 1-4 fixtures


**SOLO100W-700**

0-10V EldoLED SOLOdrive  
100W for 1-8 fixtures

Recessed casing required

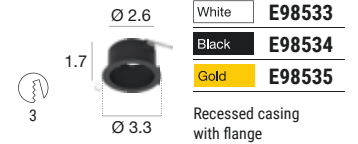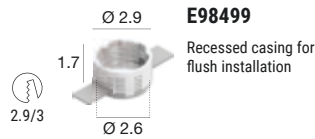

Epitax\_J | Downlight | powerLED | Damp Location | Driver remote | Adjustable | 15W 400mA

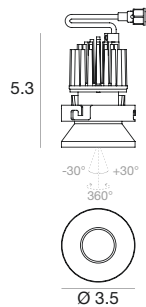

Balance - CRI 92

White	<b>E80648</b>	2700 K	1568 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80649</b>	3000 K	1677 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80760</b>	3500 K	1677 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	1804 lm	<b>N</b>		

Efficiency - CRI 80

White	<b>E80646</b>	2700 K	1932 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E80647</b>	3000 K	1932 lm	<b>W</b>	Medium Flood	<b>30</b>
Gold	<b>E80759</b>	3500 K	1932 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	2078 lm	<b>N</b>		

Power supply options (remote only)

**ECO30W-400**

0-10V EldoLED ECOdrive  
30W for 1 fixture



**SOLO50W-400**

0-10V EldoLED SOLOdrive  
50W for 1-2 fixtures

**SOLO100W-400**

0-10V EldoLED SOLOdrive  
100W for 1-4 fixtures

Recessed casing required

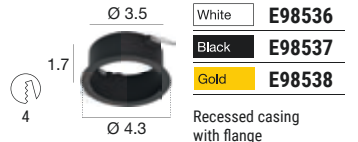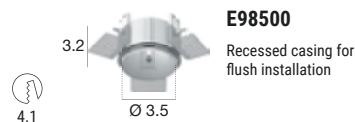

technical information