



















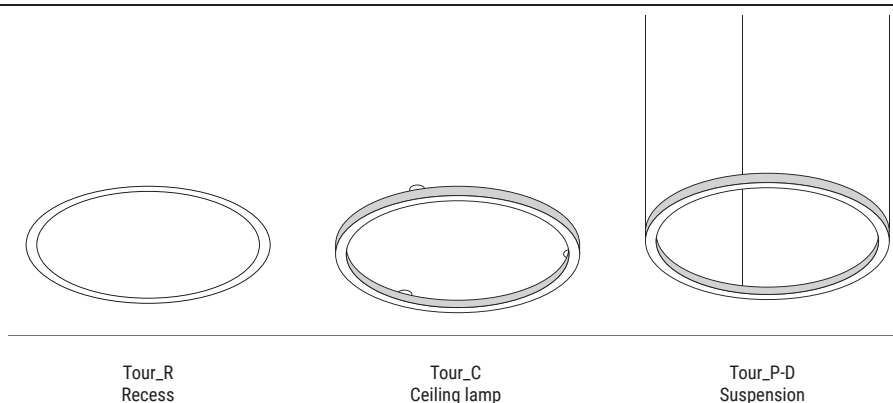
tour range



						
Profile	1.5" W x 1.5" H	1.5" W x 1.5" H	1.5" W x 3" H	1.5" W x 3" H	1.5" W x 1.5" H	1.5" W x 1.5" H
26.2 x 26.2 in	-	Q - QV 45 W	-	90 W	-	-
29.1 in	PD - PU 37.5 W	-	75 W	-	37.5 W	37.5 W
29.5 in	PI 29 W	-	-	-	-	-
35.8 in	PD - PU 45 W	-	90 W	-	-	-
37 in	-	-	-	-	45 W	-
37.2 in	PI 36.5 W	-	-	-	-	36.5 W
49.4 x 49.4 in		Q 90 W	-	180 W	-	-
56.3 in	PD 70 W	-	140 W	-	-	-
57.9 in	-	-	-	-	70 W	-
58.1 in	PI 57.5 W	-	-	-	-	57.5 W
65.2 x 49.4 in		Q 105 W	-	210 W	-	-
96.5 in	PD - PU 114 W	-	224 W	-	-	-
Finish						
CRI 92	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K
Emission						
Driver	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V

Application versatility

Tour's development process created the product as an application solution capable of adapting to any architectural need. In the suspension version, the support cables are the same that power-supply the product and they come 196.85 inch long on the four dimensions. Lastly, thanks to the ceiling-mounted version and recess, Tour becomes a dynamic element provided with a clean design without interfering with the style it is made of.




The ring

Tour comes with an extruded aluminum profile which places it in a class of its own due to its almost imperceptible size. Due to its prestigious six finishes, Tour becomes an all-around element suitable for any architectural solution.




Emissions range

Tour comes with four different emissions: direct, indirect, internal lateral and dual-side emission. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

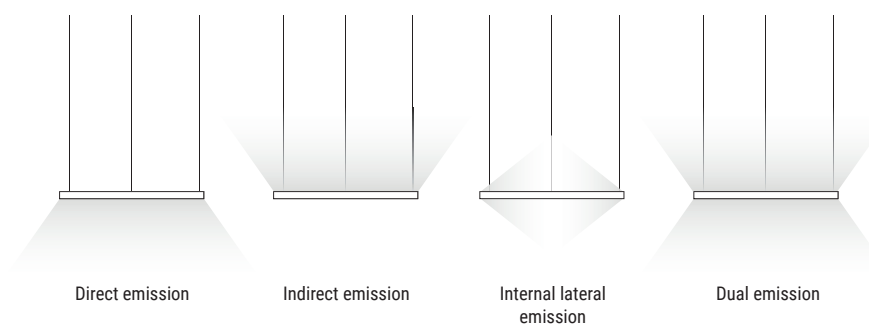

Harmonic diffusion

The opaline polycarbonate screen guarantees visual comfort and a perfect diffusion. Is easily removable thanks to a system equipped with a spring, patented and specially designed to perfectly adapt to the extruded element.

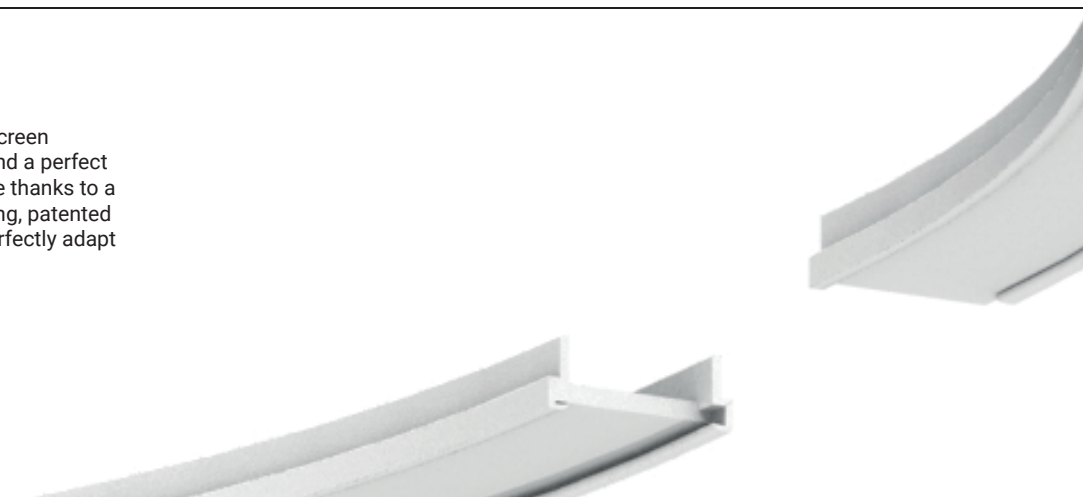

Tour_CD | Ceiling Light | 24 V | topLED | Driver remote | 37.5W

1.5H x 1.5W

Ø 29.1



White	E65350	3000 K	4678 lm	W	General	00
Black	E65351	3500 K	4678 lm	T		
Nickel	E65352	4000 K	5006 lm	N		
Gold	E63740					
Bronze	E65354					
Rose gold	E65355					

Power supply options (remote only)**OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_CD | Ceiling Light | 24 V | topLED | Driver remote | 45W

1.5H x 1.5W

Ø 35.8



White	E65356	3000 K	5847 lm	W	General	00
Black	E65357	3500 K	5847 lm	T		
Nickel	E65358	4000 K	6139 lm	N		
Gold	E63750					
Bronze	E65360					
Rose gold	E65361					

Power supply options (remote only)**OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_CD | Ceiling Light | 24 V | topLED | Driver remote | 70W

1.5H x 1.5W

Ø 56.3




White	E65362	3000 K	9355 lm	W	General	00
Black	E65363	3500 K	9355 lm	T		
Nickel	E65364	4000 K	9823 lm	N		
Gold	E63760					
Bronze	E65366					
Rose gold	E65367					

Power supply options (remote only)**OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Spacer kit for Tour_C

White	E65386
Black	E65387
Nickel	E65389
Gold	E63724
Bronze	E65390
Rose gold	E65391

The Tour_C version
comes with 0.9 inch-long
spacers included.

Tour_CI | Ceiling_Wall Light | 24 V | stripLED | Driver remote | 29W

2.4H x 1.5W

Ø 29.5



White	E65368	3000 K	3000 lm	W
Black	E65369	3500 K	3000 lm	T
Nickel	E65370	4000 K	3220 lm	N
Gold	E63721			
Bronze	E65372			
Rose gold	E65373			

General **00****Power supply options (remote only)****OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_CI | Ceiling_Wall Light | 24 V | stripLED | Driver remote | 36.5W

2.4H x 1.5W

Ø 37.2



White	E65374	3000 K	3785 lm	W
Black	E65375	3500 K	3785 lm	T
Nickel	E65376	4000 K	4060 lm	N
Gold	E63722			
Bronze	E65378			
Rose gold	E65379			

General **00****Power supply options (remote only)****OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_CI | Ceiling_Wall Light | 24 V | stripLED | Driver remote | 57.5W

2.4H x 1.5W

Ø 58.1




White	E65380	3000 K	6000 lm	W
Black	E65381	3500 K	6000 lm	T
Nickel	E65382	4000 K	6440 lm	N
Gold	E63723			
Bronze	E65384			
Rose gold	E65385			

General **00****Power supply options (remote only)****OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Spacer kit for Tour_C


White	E65386
Black	E65387
Nickel	E65389
Gold	E63724
Bronze	E65390
Rose gold	E65391

The Tour_C version
comes with 0.9 inch-long
spacers included.


Configuration of Tour_C with spacer kit

Providing an ON/OFF composition. Tour_CI, CD with spacer kit. Tour_C is distributed including 0.9 inch spacers which can be possibly replaced by the suspension kit to extend the distance from the ceiling.

Selection
Tour model




Selection
suspension kit



Selection
driver / controller

- OT96-D010**
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure
- OT96-JBX**
Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Final result

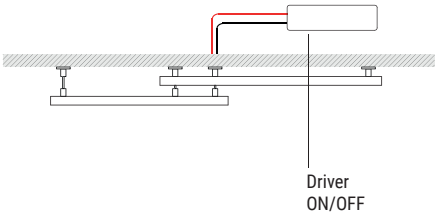


Ordering example:

n.1 art. E65368W00 + n.1 art. E65386 (spacer kit) + n.1 art. E99374 (driver ON/OFF)

Recess Tour configuration

Providing an ON/OFF configuration with Tour_R.


Selection
Tour model



Selection
driver / controller

- OT96-D010**
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure
- OT96-JBX**
Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Final result

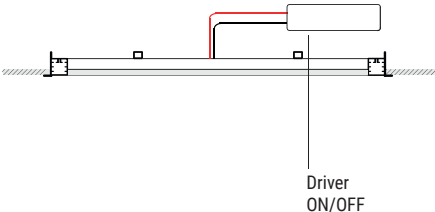

Ordering example:

n.1 art. E65420W00 + n.1 art. E99374 (driver ON/OFF)