


tour range



						
Profile	1.5" W x 1.5" H	1.5" W x 1.5" H	1.5" W x 3" H	1.5" W x 3" H	1.5" W x 1.5" H	1.5" W x 1.5" H
26.2 x 26.2 in	-	Q - QV 45 W	-	90 W	-	-
29.1 in	PD - PU 37.5 W	-	75 W	-	37.5 W	37.5 W
29.5 in	PI 29 W	-	-	-	-	-
35.8 in	PD - PU 45 W	-	90 W	-	-	-
37 in	-	-	-	-	45 W	-
37.2 in	PI 36.5 W	-	-	-	-	36.5 W
49.4 x 49.4 in		Q 90 W	-	180 W	-	-
56.3 in	PD 70 W	-	140 W	-	-	-
57.9 in	-	-	-	-	70 W	-
58.1 in	PI 57.5 W	-	-	-	-	57.5 W
65.2 x 49.4 in		Q 105 W	-	210 W	-	-
96.5 in	PD - PU 114 W	-	224 W	-	-	-
Finish						
CRI 92	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K
Emission						
Driver	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V

Application versatility

Tour's development process created the product as an application solution capable of adapting to any architectural need. In the suspension version, the support cables are the same that power-supply the product and they come 196.85 inch long on the four dimensions. Lastly, thanks to the ceiling-mounted version and recess, Tour becomes a dynamic element provided with a clean design without interfering with the style it is made of.

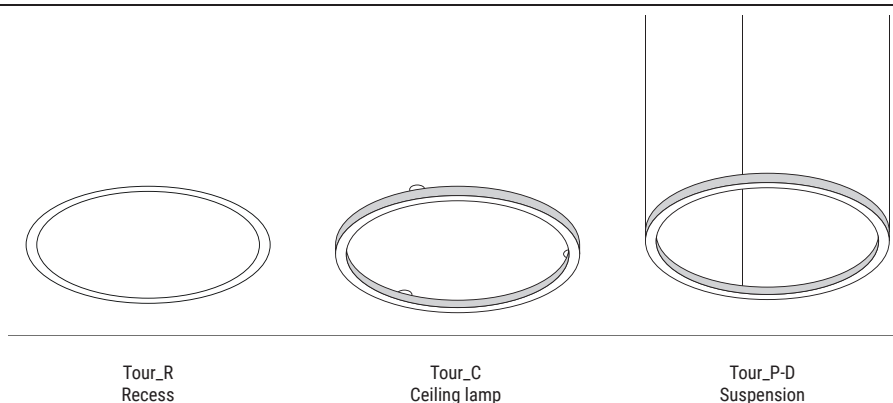


The ring

Tour comes with an extruded aluminum profile which places it in a class of its own due to its almost imperceptible size. Due to its prestigious six finishes, Tour becomes an all-around element suitable for any architectural solution.




Emissions range


Tour comes with four different emissions: direct, indirect, internal lateral and dual-side emission. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

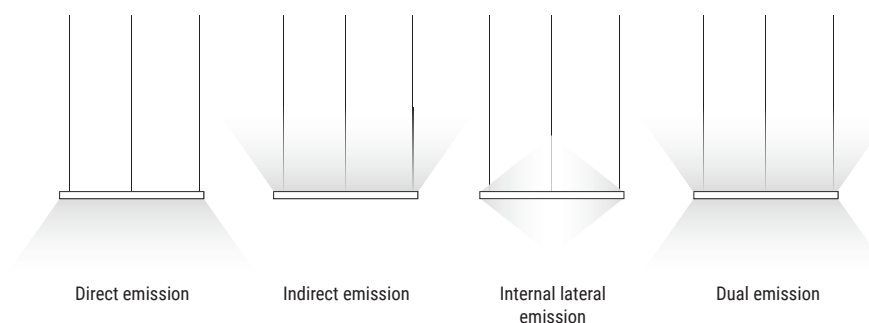

Harmonic diffusion

The opaline polycarbonate screen guarantees visual comfort and a perfect diffusion. Is easily removable thanks to a system equipped with a spring, patented and specially designed to perfectly adapt to the extruded element.

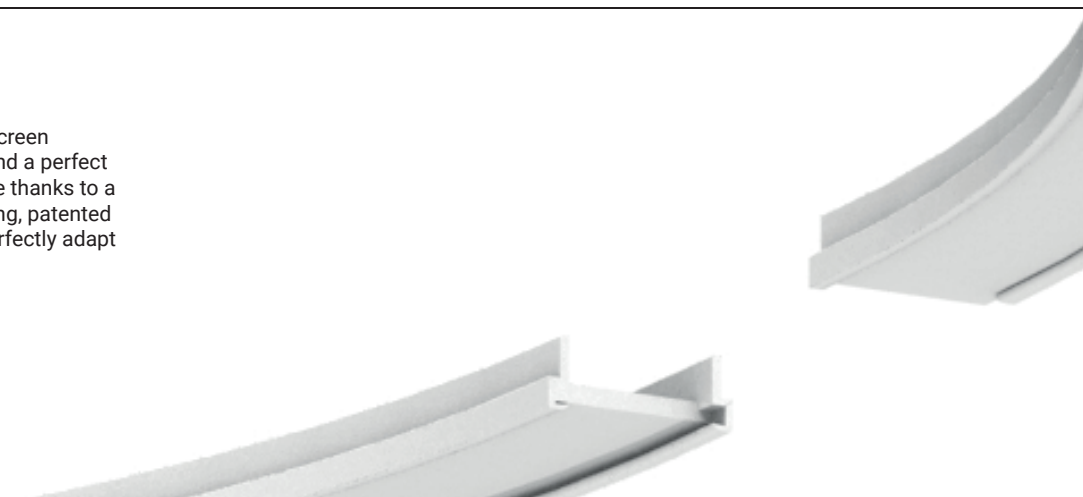

Tour_D | Pendant Luminaires | 24 V | topLED | Driver remote | 75W


Use a dual driver
for dual lighting


White	E65300	3000 K	9356 lm	W	General	00
Black	E65301	3500 K	9356 lm	T		
Nickel	E65302	4000 K	10012 lm	N		
Gold	E63711					
Bronze	E65304					
Rose gold	E65305					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_D | Pendant Luminaires | 24 V | topLED | Driver remote | 90W


Use a dual driver
for dual lighting

White	E65306	3000 K	11894 lm	W	General	00
Black	E65307	3500 K	11894 lm	T		
Nickel	E65308	4000 K	12278 lm	N		
Gold	E63712					
Bronze	E65310					
Rose gold	E65311					



Requires 2 Drivers

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_D | Pendant Luminaires | 24 V | topLED | Driver remote | 140W


Use a dual driver
for dual lighting

White	E65312	3000 K	18710 lm	W	General	00
Black	E65313	3500 K	18710 lm	T		
Nickel	E65314	4000 K	19646 lm	N		
Gold	E63713					
Bronze	E65316					
Rose gold	E65317					


Requires 2 Drivers

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_Q | Pendant Luminaires | 24 V | topLED | Driver remote | 45W



White	E64360	3000 K	4810 lm	W	General	00
Black	E64370	3500 K	4810 lm	T		
		4000 K	5040 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_Q | Pendant Luminaires | 24 V | topLED | Driver remote | 90W



White	E64361	3000 K	9619 lm	W	General	00
Black	E64371	3500 K	9619 lm	T		
		4000 K	10080 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_Q | Pendant Luminaires | 24 V | topLED | Driver remote | 105W



White	E64362	3000 K	11222 lm	W	General	00
Black	E64372	3500 K	11222 lm	T		
		4000 K	11760 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_QD | Pendant Luminaires | 24 V | topLED | Driver remote | 90W



White	E64363	3000 K	9619 lm	W	General	00
Black	E64373	3500 K	9619 lm	T		
		4000 K	10080 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_QD | Pendant Luminaires | 24 V | topLED | Driver remote | 180W




White	E64364	3000 K	18437 lm	W	General	00
Black	E64374	3500 K	18437 lm	T		
		4000 K	19320 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_QV | Pendant Luminaires | 24 V | topLED | Driver remote | 45W


White	E64260	3000 K	4810 lm	W	General	00
Black	E64250	3500 K	4810 lm	T		
		4000 K	5040 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure


OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Single lighting remote driver configuration

Providing a Tour_PD composition with remote driver.

Selection
Tour model

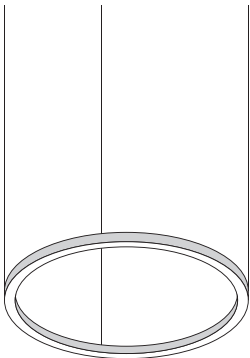

Ordering example:

n.1 art. E64570W00
(Tour_PD1)



Selection
suspension kit




n.1 art. E64575
(Suspensions)

Selection
driver / controller

- OT96-D010**
Osram, 10% 0-10V dim, 96W, 24VDC,
120-277VAC, supplied in a Dry
location enclosure
- OT96-JBX**
Osram, Non-Dim, 96W, 24VDC, 120-
277VAC, Wet Location

Final result

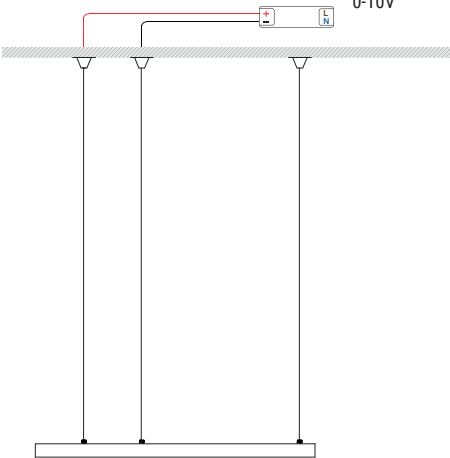


Driver:
ON/OFF
0-10V

Dual lighting remote driver configuration

Providing a Tour_D composition with remote driver
which commands dual lighting.

Selection
Tour model

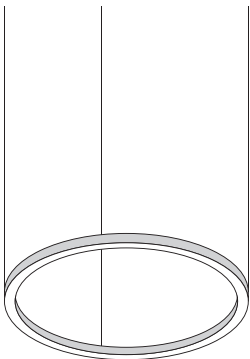

Ordering example:

n.1 art. E65312W00
(Tour_D3)



Selection
suspension kit




n.1 art. E64575
(Suspensions)

Selection
driver / controller

- OT96-D010**
Osram, 10% 0-10V dim, 96W, 24VDC,
120-277VAC, supplied in a Dry
location enclosure
- OT96-JBX**
Osram, Non-Dim, 96W, 24VDC, 120-
277VAC, Wet Location


Final result

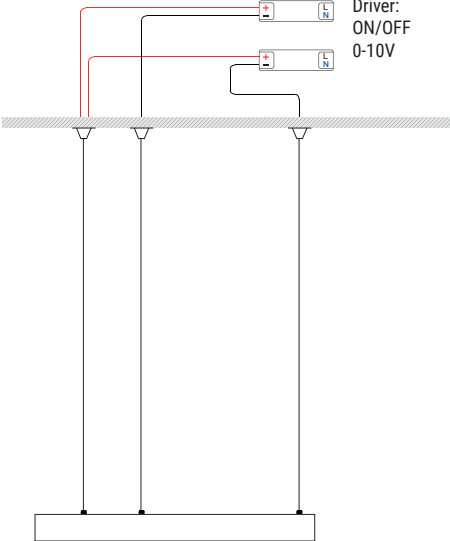

One driver for uplight, one for
downlight

Driver:
ON/OFF
0-10V

3-cone fixing kit Tour_R




For version Ø 96.46 requires 2x fixing
kit with 3 cones each

type

- White **E64575**
- Black **E64670**
- Nickel **E64671**

- Gold **E63700**
- Bronze **E64673**
- Rose gold **E65141**


3-cone fixing kit Tour_Q




type

- White **E64270**
- Black **E64240**


3-coupling point ceiling rose for one-side emission Tour R

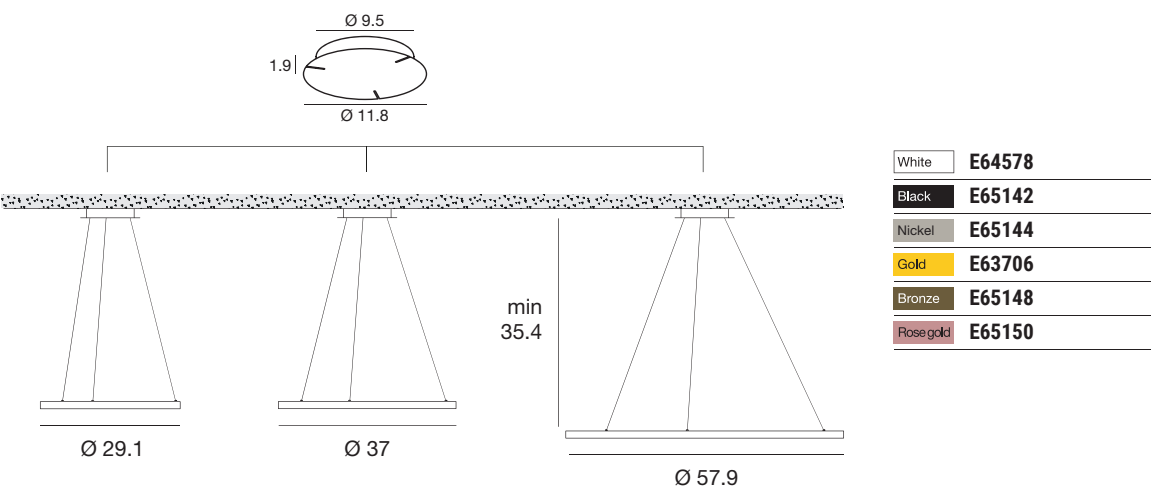

4-coupling point ceiling rose for one-side emission Tour Q

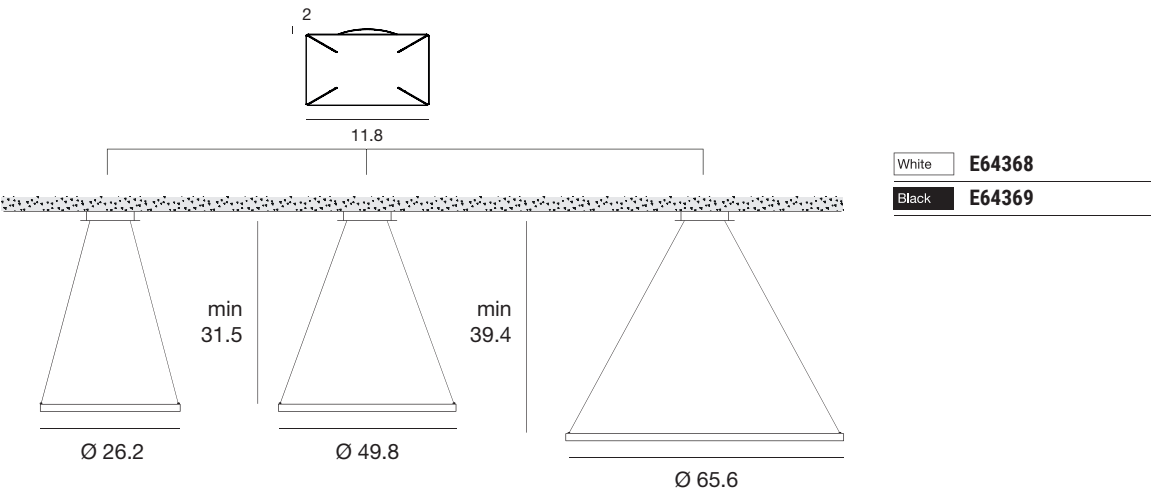


6-point coupling ceiling rose for 96.46 inch-long one-side emission Tour R

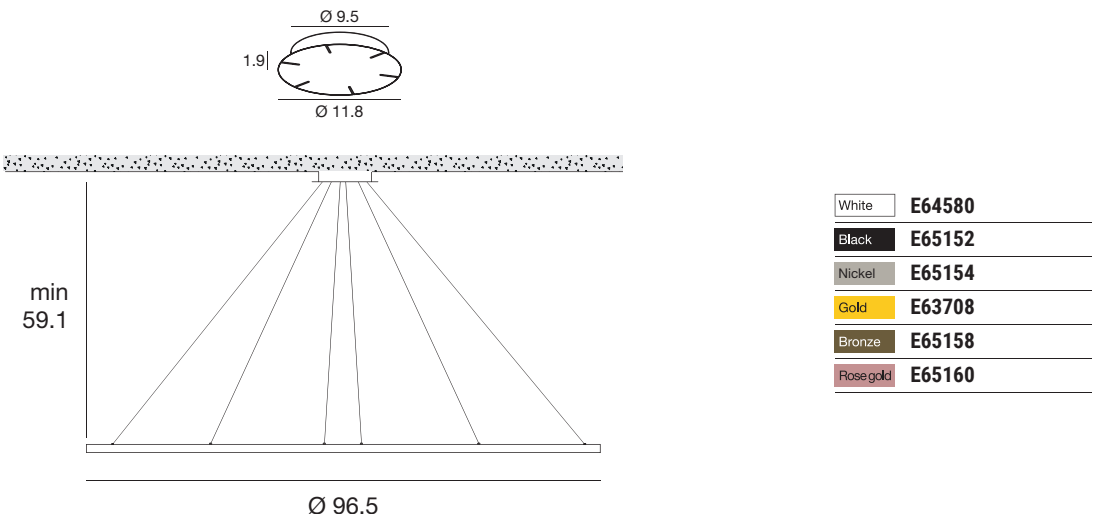


Configuration with 96.46 dual-side emission central ceiling rose

Providing a Tour_D composition with central ceiling rose.


Selection
Tour model



Selection of
central ceiling rose



Final result

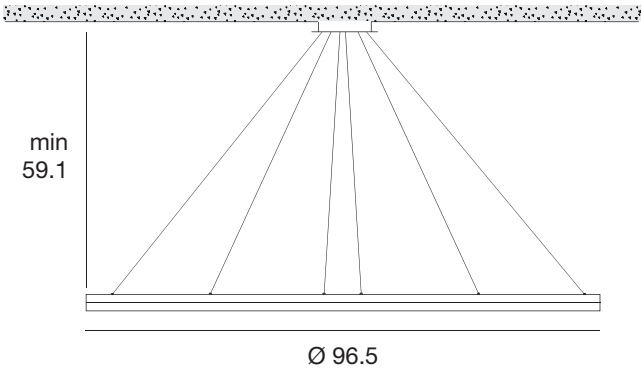


Ordering example:

n.1 art. E64570W00
(Tour_PD1)

+


n.1 art. E64578
(ON/OFF)

Coupling ceiling rose for dual-side emission Tour R



White	E65324
Black	E65326
Nickel	E65328
Gold	E63701
Bronze	E65332
Rose gold	E65334

Coupling ceiling rose for dual-side emission Tour Q




White	E64358
Black	E64359


Configuration with central ceiling rose for compositions

Providing a Tour_PD, PU and D composition with central ceiling rose.


Selection
Tour model

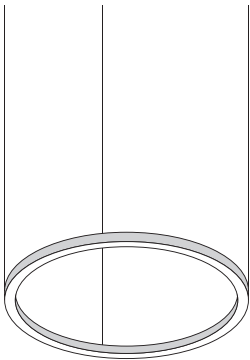

Selection of
central ceiling rose



Final result

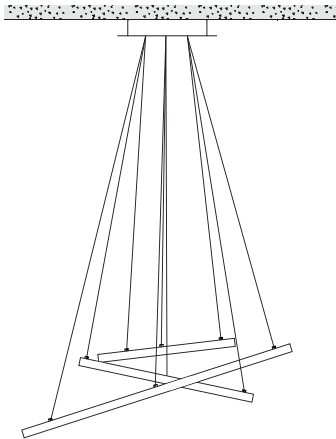



Ordering example:

n.1 art. E64570W00
n.1 art. E64584W00
n.1 art. E65312W00

+

n.1 art. E65412
(ON/OFF)

6-point ceiling rose for 3 tour fixing

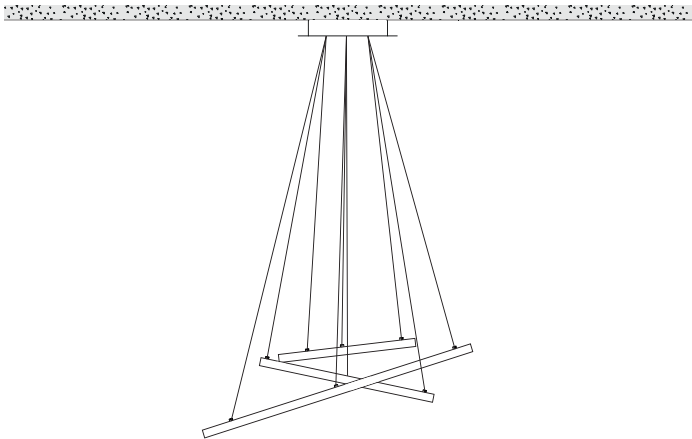

White	E65412
Black	E65413
Nickel	E65414
Gold	E63716
Bronze	E65416
Rose gold	E65417