

Tour Pendant Round Direct-Indirect



General: Tour is a comprehensive family of large pendants created to become integral part of any architectural design. Tour is available in Round, Square or Rectangular shape, with multiple sizes to choose from, and several distributions (Direct, Indirect, Direct/Indirect, Inside). Lobby spaces, conference rooms, retail stores are just some of the many applications Tour could be the perfect fit for.

Fixture Body: Powder Coated Aluminum 6060 (superior corrosion resistance).

Diffuser: Opaline UV resistant Polycarbonate.

Mounting: Suspension.

Dimensions/Weight: 29.2" (13.23 lbs) – 35.9" (16.31 lbs) – 56.3" (25.57 lbs) – 96.5" (43.87 lbs)

Driver: 120-277V. Integral inside canopy (0-10V Dimming), or Remote (0-10V Dimming or Non-Dim).

Operation: Constant Voltage, 24V DC (CV). Dual circuit provided to turn on down and up separately.

Wattages Down/Up: 37.5W/7.5W (29.1") – 45W/9W (35.9") – 70W/14W (56.3") – 114W/23W (96.5").

Power Over Suspension Cable: Max 196.9" length.

IP rating: IP40. Fixture is protected against solid objects greater than 0.04".

ETL Certification: ETL, dry location


Optics: Fixed, Direct/Indirect (Down/Up Emission with a 5:1 ratio).
General Illumination.

Color temperatures: 3000K – 3500K – 4000K.

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

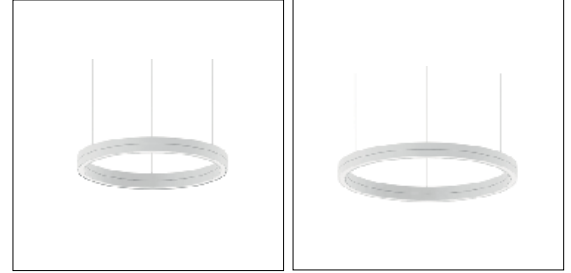

29.2" (45W)

35.9" (54W)



56.3" (84W)

96.5" (137W)

Delivered Lumens*	29.2"	35.9"	56.3"	96.5"
GE	2622 + 524	3181 + 636	4951 + 990	8357 + 1671

*Values shown for 3000K


Ordering Information							
TOU		DIIN			GE		
Product	Trim/Finish	Type	Diameter/Size	Wattage/Operation	Color Temp	Optic	+ Remote Driver (Required) ¹
TOU = Tour	ROWH = Round White ROBL = Round Black RONI = Round Nickel ROGO = Round Gold ROBR = Round Bronze RORG = Round Rose Gold	DIIN = Direct + Indirect Distribution	29 = 29.2"	45 CV = 37.5W+7.5W / Remote Constant Voltage 24VDC	30 = 3000K 35 = 3500K 40 = 4000K	GE = General Illumination	Remote Driver:² E64575+OT96-D010 E64670+OT96-D010 E64671+OT96-D010 E63700+OT96-D010 E64673+OT96-D010 E65141+OT96-D010 Driver in Canopy: E64578 E63701 E65142 E65332 E65144 E65334 E63706 E65337 E65148 E65339 E65150 E65341 E65324 E63704 E65326 E65345 E65328 E65347
			36 = 35.9"	54 CV = 45W+9W / Remote Constant Voltage 24VDC			
			56 = 56.3"	84 CV = 70W+14W / Remote Constant Voltage 24VDC			
			97 = 96.5"	137 CV = 114W+23W / Remote Constant Voltage 24VDC			

¹ See page 2


² 96.5" fixture requires two 3-cone kits

Emissions range

Tour comes with four different emissions: direct, indirect, inside and direct-indirect. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

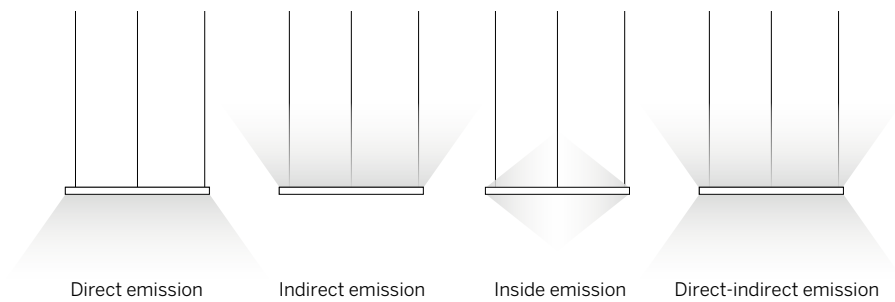

3-cone fixing kit (Remote Driver)



type


White	E64575
Black	E64670
Nickel	E64671

Gold	E63700
Bronze	E64673
Rose gold	E65141



Note: 96.5"Ø requires two fixing kits with 3-cones each

OT96-D010
Osram, 10% 0-10V dim,
96W, 24VDC, 120-277VAC,
supplied in a Dry location
enclosure

Number of drivers required		
Diameter	Single Control	Daul Control
29.2"	1 driver	2 drivers
35.9"	1 driver	2 drivers
56.3"	1 driver	2 drivers
96.5"	2 drivers	3 drivers

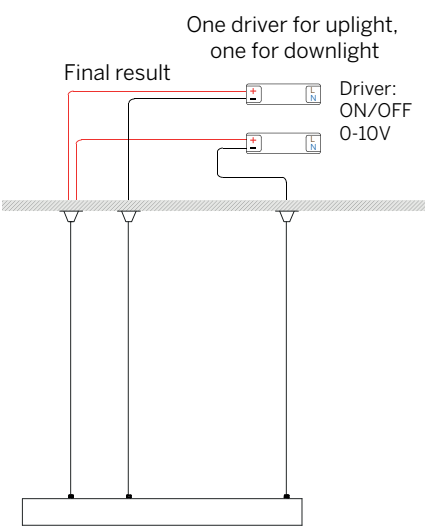


3-coupling point ceiling canopy for single control (Integral 0-10V dimming driver in canopy)

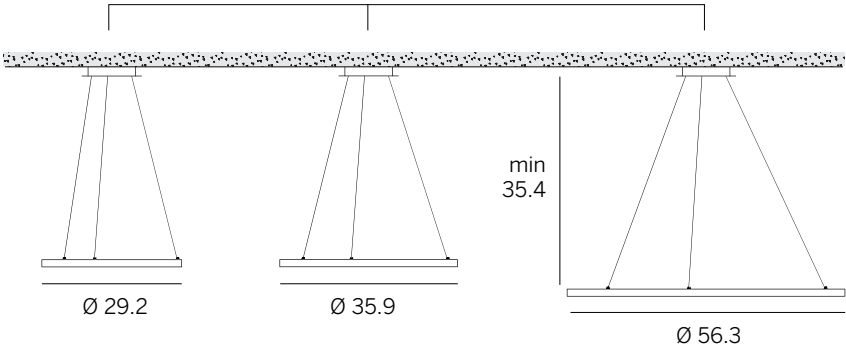


White	E64578
Black	E65142
Nickel	E65144
Gold	E63706
Bronze	E65148
Rose gold	E65150


3-coupling point ceiling canopy for dual control (Integral 0-10V dimming driver in canopy)

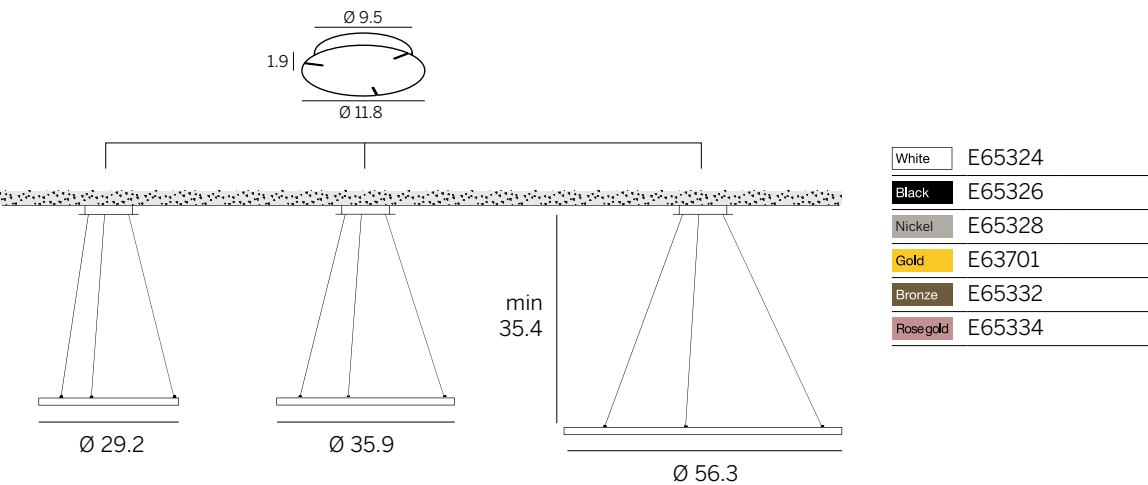


6-point coupling ceiling canopy for 96.5 inch diam. for single or dual control (Integral 0-10V dimming driver in canopy)

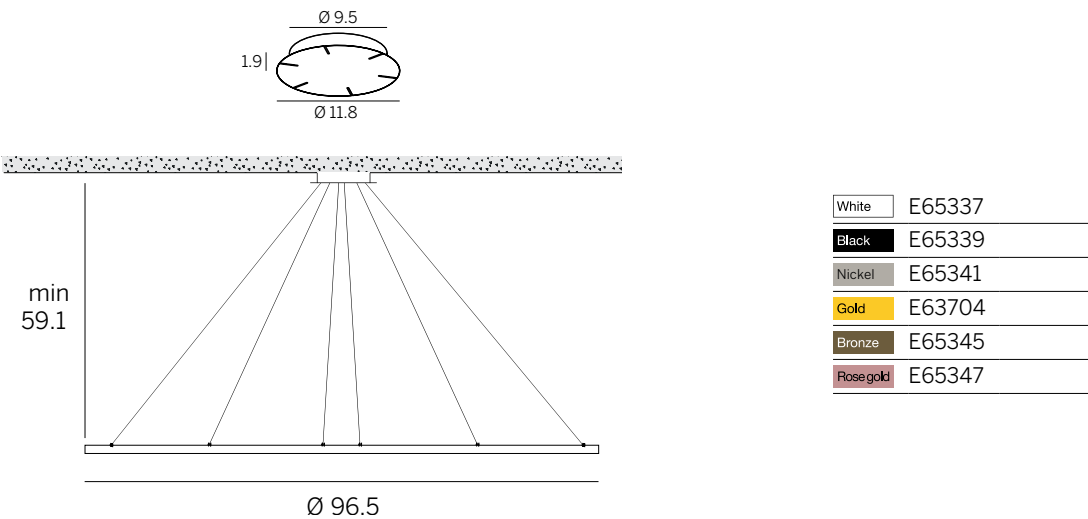


29.2" (45W)



35.9" (54W)



56.3" (84W)



96.5" (137W)

