



Warp_QY | Downlight | powerLED | Damp Location | Driver remote | Asymmetric | 2W 630mA



Balance - CRI 92

White	E90822	2700 K	157 lm	M	Spot	15
Black	E90823	3000 K	179 lm	W	Medium Flood	30
		3500 K	179 lm	T	Flood	60



White	E90826
Black	E90827

Efficiency - CRI 80

White	E90820	2700 K	219 lm	M	Spot	15
Black	E90821	3000 K	233 lm	W	Medium Flood	30
		3500 K	233 lm	T	Flood	60




White	E90824
Black	E90825

Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
--	--	--

Warp_QY | Downlight | powerLED | Damp Location | Driver remote | Asymmetric | 4W 350mA



Balance - CRI 92

White	E90838	2700 K	395 lm	M	Spot	15
Black	E90839	3000 K	423 lm	W	Medium Flood	30
		3500 K	423 lm	T	Flood	60



White	E90842
Black	E90843

Efficiency - CRI 80


White	E90836	2700 K	490 lm	M	Spot	15
Black	E90837	3000 K	490 lm	W	Medium Flood	30
		3500 K	490 lm	T	Flood	60




White	E90840
Black	E90841

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
---	---	--



Warp_QY | Downlight | powerLED | Damp Location | Driver remote | Asymmetric | 10W 800mA





Balance - CRI 92							
White	E90854	2700 K	960 lm	M	Spot	15	
Black	E90855	3000 K	1034 lm	W	Medium Flood	30	
		3500 K	1034 lm	T	Flood	60	
White	E90858	4000 K	1108 lm	N			
Black	E90859						

Efficiency - CRI 80							
White	E90852	2700 K	1108 lm	M	Spot	15	
Black	E90853	3000 K	1194 lm	W	Medium Flood	30	
		3500 K	1194 lm	T	Flood	60	
White	E90856	4000 K	1280 lm	N			
Black	E90857						

Power supply options (remote only)

ECO30W-800	SOLO100W-800
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Warp_QY | Downlight | arrayLED | Damp Location | Driver remote | Asymmetric | 15W 400mA




Balance - CRI 92							
White	E90870	2700 K	1568 lm	M	Spot	15	
Black	E90871	3000 K	1677 lm	W	Medium Flood	30	
		3500 K	1677 lm	T	Flood	60	
White	E90874	4000 K	1804 lm	N			
Black	E90875						



Efficiency - CRI 80							
White	E90868	2700 K	1932 lm	M	Spot	15	
Black	E90869	3000 K	1932 lm	W	Medium Flood	30	
		3500 K	1932 lm	T	Flood	60	
White	E90872	4000 K	2078 lm	N			
Black	E90873						

Power supply options (remote only)

ECO30W-400	SOLO50W-400	SOLO100W-400
0-10V EldoLED ECOdrive 30W for 1 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures



Warp_QY | Downlight | arrayLED | Damp Location | Driver remote | Asymmetric | 25W 700mA



Balance - CRI 92

White	E90886	2700 K	2598 lm	M	Spot	15
Black	E90887	3000 K	2794 lm	W	Medium Flood	30
		3500 K	2794 lm	T	Flood	60
White	E90890	4000 K	2990 lm	N		
Black	E90891					

Efficiency - CRI 80

White	E90884	2700 K	3210 lm	M	Spot	15
Black	E90885	3000 K	3431 lm	W	Medium Flood	30
		3500 K	3431 lm	T	Flood	60
White	E90888	4000 K	3431 lm	N		
Black	E90889					

Power supply options (remote only)

SOLO50W-700


0-10V EldoLED SOLOdrive
50W for 1 fixture

SOLO100W-700


0-10V EldoLED SOLOdrive
100W for 1-3 fixtures

technical information


E90884W60




Photometric curve



Light beam

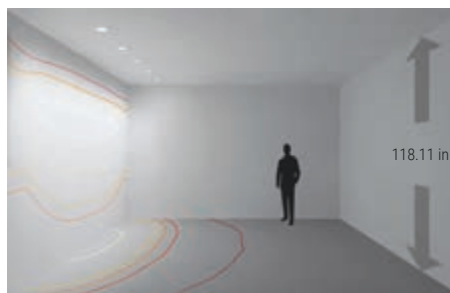

25 LUX 300 LUX 500 LUX 700 LUX 750 LUX 900 LUX 1000 LUX



Floor plan