


Warp_RY | Downlight | powerLED | Damp Location | Driver remote | Asymmetric | 2W 630mA



Balance - CRI 92

White	E90814	2700 K	157 lm	M	Spot	15
Black	E90815	3000 K	179 lm	W	Medium Flood	30
		3500 K	179 lm	T	Flood	60



White	E90818
Black	E90819

Efficiency - CRI 80


White	E90812	2700 K	219 lm	M	Spot	15
Black	E90813	3000 K	233 lm	W	Medium Flood	30
		3500 K	233 lm	T	Flood	60




White	E90816	4000 K	249 lm	N
Black	E90817			

Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
--	--	--



Warp_RY | Downlight | powerLED | Damp Location | Driver remote | Asymmetric | 4W 350mA



Balance - CRI 92

White	E90830	2700 K	395 lm	M	Spot	15
Black	E90831	3000 K	423 lm	W	Medium Flood	30
		3500 K	423 lm	T	Flood	60



White	E90834	4000 K	456 lm	N
Black	E90835			

Efficiency - CRI 80

White	E90828	2700 K	490 lm	M	Spot	15
Black	E90829	3000 K	490 lm	W	Medium Flood	30
		3500 K	490 lm	T	Flood	60



White	E90832	4000 K	529 lm	N
Black	E90833			



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
---	---	--



technical information

Warp_RY | Downlight | powerLED | Damp Location | Driver remote | Asymmetric | 10W 800mA



2.5

HC

Balance - CRI 92

White	E90846	2700 K	1054 lm	M	Spot	15
Black	E90847	3000 K	1135 lm	W	Medium Flood	30
		3500 K	1135 lm	T	Flood	60
White	E90850	4000 K	1216 lm	N		
Black	E90851					

Efficiency - CRI 80



White	E90844	2700 K	1216 lm	M	Spot	15
Black	E90845	3000 K	1310 lm	W	Medium Flood	30
		3500 K	1310 lm	T	Flood	60
White	E90848	4000 K	1405 lm	N		
Black	E90849					

HC

Power supply options (remote only)

ECO30W-800	SOLO100W-800
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Warp_RY | Downlight | arrayLED | Damp Location | Driver remote | Asymmetric | 15W 400mA



3.6

HC

Balance - CRI 92

White	E90862	2700 K	1568 lm	M	Spot	15
Black	E90863	3000 K	1677 lm	W	Medium Flood	30
		3500 K	1677 lm	T	Flood	60
White	E90866	4000 K	1804 lm	N		
Black	E90867					

Efficiency - CRI 80

White	E90860	2700 K	1932 lm	M	Spot	15
Black	E90861	3000 K	1932 lm	W	Medium Flood	30
		3500 K	1932 lm	T	Flood	60
White	E90864	4000 K	2078 lm	N		
Black	E90865					



HC

Power supply options (remote only)

ECO30W-400	SOLO50W-400	SOLO100W-400
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

technical information

Warp_RY | Downlight | arrayLED | Damp Location | Driver remote | Asymmetric | 25W 700mA



Balance - CRI 92

White E90878	2700 K	2598 lm	M	Spot	15
Black E90879	3000 K	2794 lm	W	Medium Flood	30
	3500 K	2794 lm	T	Flood	60
White E90882	4000 K	2990 lm	N		
Black E90883					

Efficiency - CRI 80

White E90876	2700 K	3210 lm	M	Spot	15
Black E90877	3000 K	3341 lm	W	Medium Flood	30
	3500 K	3341 lm	T	Flood	60
White E90880	4000 K	3431 lm	N		
Black E90881					

Power supply options (remote only)

SOLO50W-700


0-10V EldoLED SOLOdrive
50W for 1 fixtures

SOLO100W-700


0-10V EldoLED SOLOdrive
100W for 1-3 fixtures

technical information


E90876W30



Photometric curve



Light beam

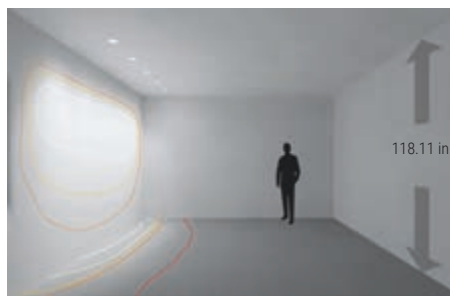

100 LUX 250 LUX 300 LUX 500 LUX 1000 LUX

Floor plan

