admiral

Aquastop®

Admiral is designed exclusively for use in water. Its easy-maintenance flange is made from a special high-tech corrosion-resistant polymer, and the light source is totally shielded from the water. It has IP68 protection, and exclusive AquaStop® technology keeps moisture away from the power cables. A choice of five optics makes Admiral an extremely flexible design option.

Materials
AISI 316 stainless steel body
High-tech polymer flange with inertial characteristics making it ideal for underwater settings

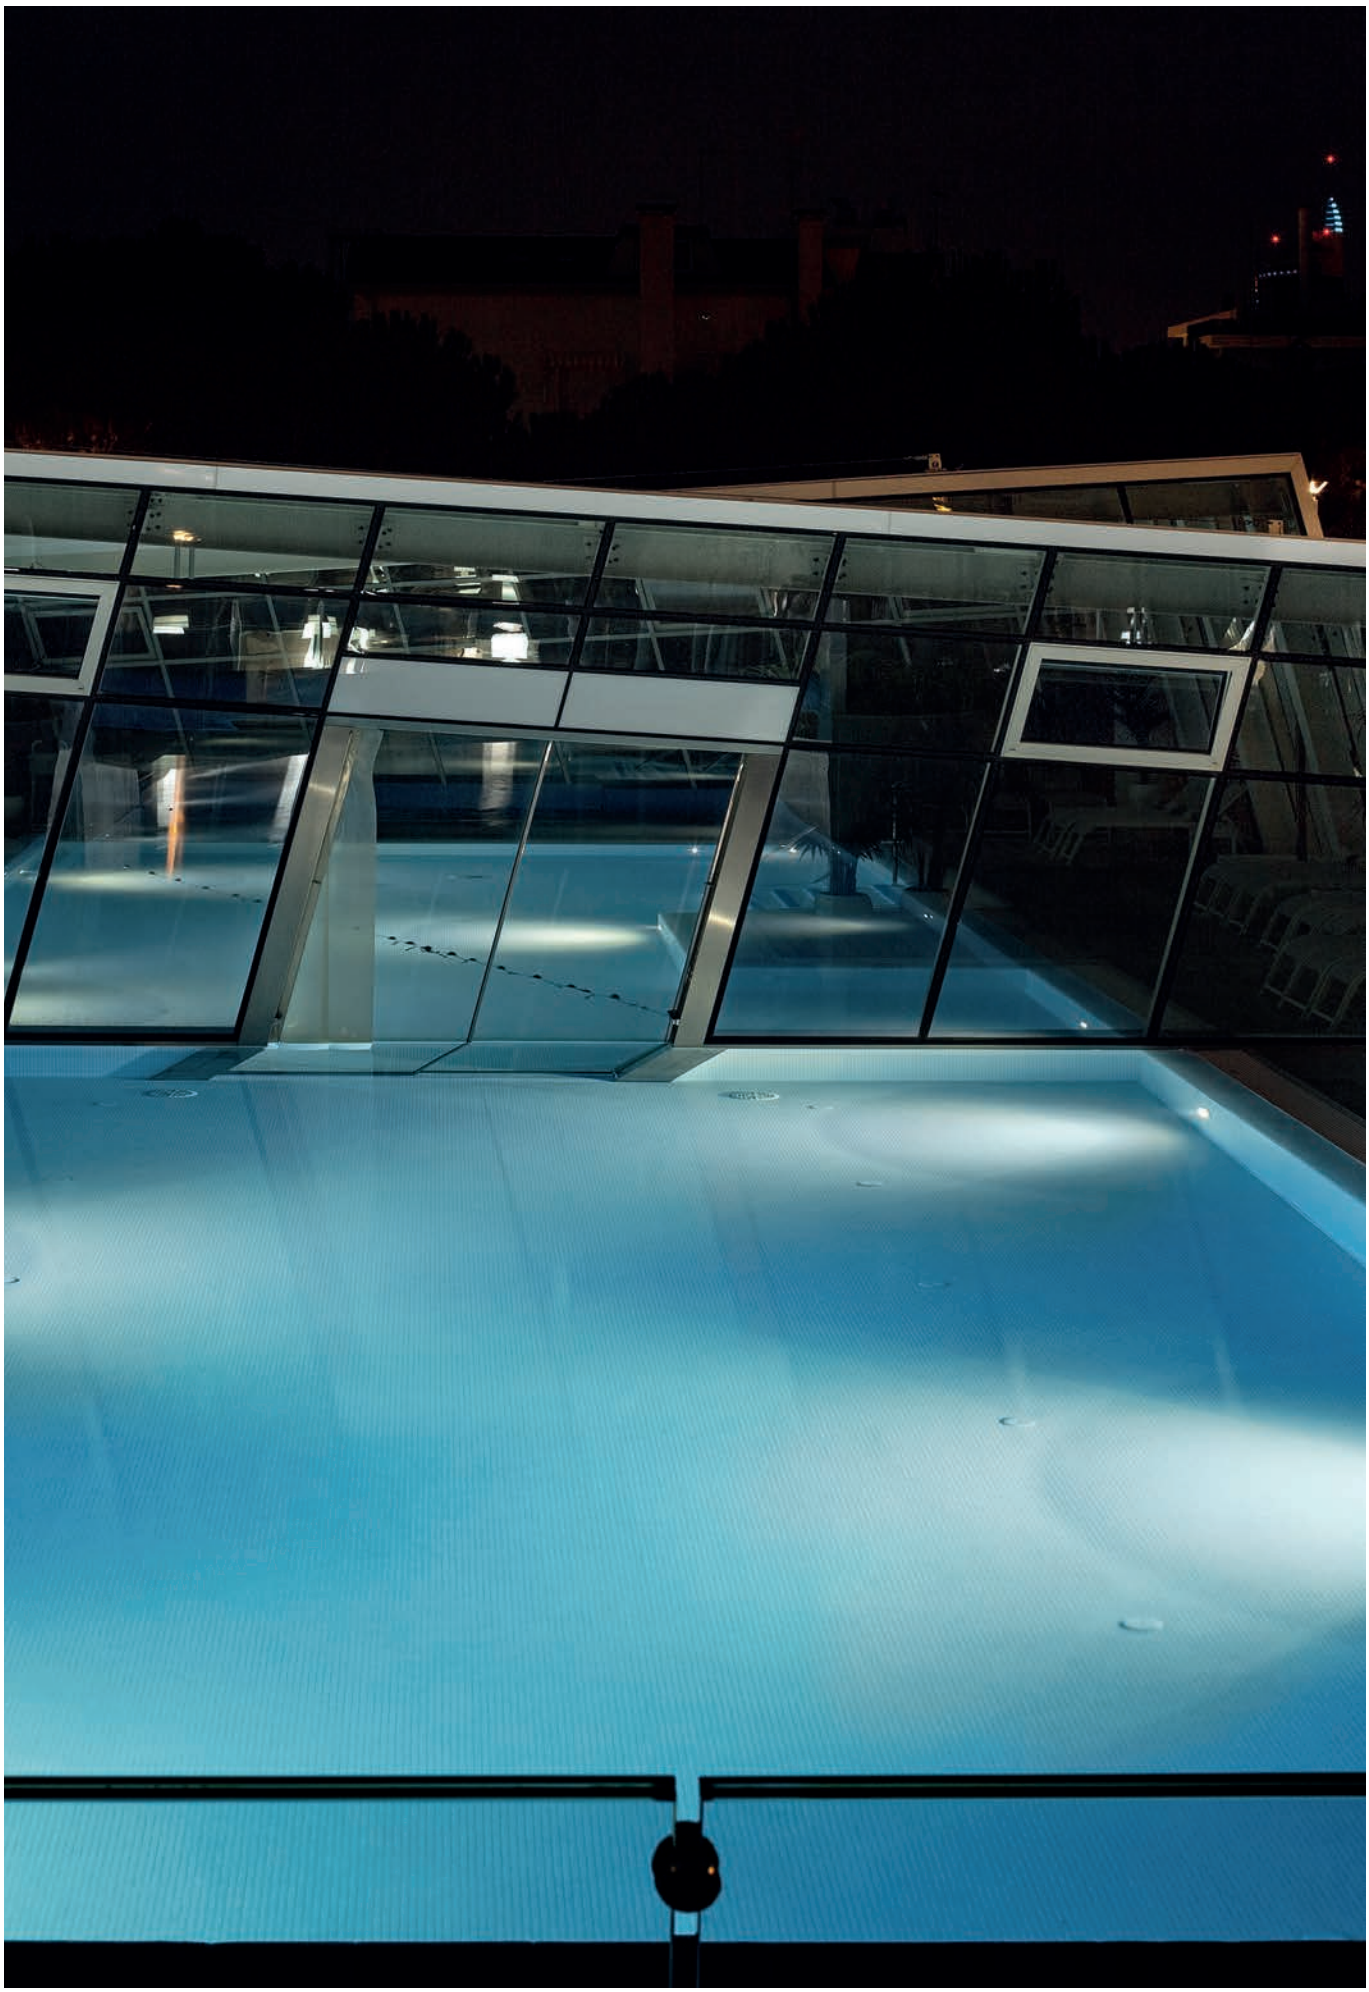

Admiral_I | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 2W 630 mA

Recessed casings
623



CRI 80

Steel	**E93114**	3000 K	233 lm	**W**	Narrow Spot	**08**
		4000 K	249 lm	**N**	Spot	**15**
					Medium Flood	**30**
					Flood	**60**
					Wide Flood	**12**
					General	**00**

Power supply options (remote only)

ECO30W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures

SOLO50W-630
0-10V EldoLED SOLOdrive 50W for1-16 fixtures

SOLO100W-630
0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

Admiral_I | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Walkover | 6W

Recessed casings
623



CRI 80

Steel	**E97631**	3000 K	699 lm	**W**	Spot	**15**
		4000 K	747 lm	**N**	Medium Flood	**30**
					Flood	**60**
					Wide Flood	**12**

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX
Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_I | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Walkover | 12W



Recessed casings
623



CRI 80

Steel	**E97632**	3000 K	1398 lm	**W**	Medium Flood	**30**
		4000 K	1494 lm	**N**	Flood	**60**
					Wide Flood	**12**

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX
Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_I | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Walkover | 27W

Recessed casings
623



CRI 80

Steel	**E97638**	3000 K	3582 lm	**W**	Spot	**15**
		4000 K	3834 lm	**N**	Medium Flood	**30**
					Flood	**60**
					Wide Flood	**12**

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX
Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_JI | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Adjustable | Walkover | 6W

Recessed casings
623



CRI 80

Steel **E97641**	3000 K	699 lm	**W**	Spot	**15**
	4000 K	747 lm	**N**	Medium Flood	**30**
				Flood	**60**

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_JI | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Adjustable | Walkover | 14W



Recessed casings
623



CRI 80

Steel **E97643**	3000 K	1791 lm	**W**	Spot	**15**
	4000 K	1917 lm	**N**	Medium Flood	**30**
				Flood	**60**

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_JI | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Adjustable | Walkover | 18W



Recessed casings
623



CRI 80

Steel **E97691**	3000 K	2388 lm	**W**	Spot	**15**
	4000 K	2556 lm	**N**	Medium Flood	**30**
				Flood	**60**

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_I | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 2.1W 220mA



Recessed casings
623

Steel	**E94151**	RGB	**Z**	Flood	**60**
				Wide Flood	**12**

Power supply options (remote only)

PWR50W-220

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable,
DMX control not included/Ordered separately
50W for 1-10 Fixtures

Admiral_I | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 6W 630mA



Recessed casings
623

Steel	**E93495**	RGB	**Z**	Spot	**15**
				Medium Flood	**30**
				Flood	**60**
				Wide Flood	**12**

Power supply options (remote only)

PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable,
DMX control not included/Ordered separately
50W for 1-6 Fixtures

Admiral_I | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 12W 630mA



Recessed casings
623

Steel	**E93637**	RGB	**Z**	Spot	**15**
				Medium Flood	**30**
				Flood	**60**
				Wide Flood	**12**

Power supply options (remote only)

PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable,
DMX control not included/Ordered separately
50W for 1-3 Fixtures

Admiral_POP | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 2W 630mA

Recessed casings
623



CRI 80

White	**E93112**	3000 K	233 lm	**W**	Spot	**15**
		4000 K	249 lm	**N**	Medium Flood	**30**
					Flood	**60**
					General	**00**

Power supply options (remote only)

ECO30W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures

SOLO50W-630
0-10V EldoLED SOLOdrive 50W for1-16 fixtures

SOLO100W-630
0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

Admiral_POP | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Walkover | 6W

Recessed casings
623



CRI 80

White	**E97647**	3000 K	699 lm	**W**	Spot	**15**
		4000 K	747 lm	**N**	Medium Flood	**30**
					Flood	**60**
					Wide Flood	**12**

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX
Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_POP | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Walkover | 18W



Recessed casings
623



CRI 80

White	**E97648**	3000 K	2097 lm	**W**	Spot	**15**
		4000 K	2241 lm	**N**	Medium Flood	**30**
					Flood	**60**

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX
Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_POP | Underwater luminaires | 24 V | powerLEDs | Submersible | Driver remote | Walkover | 27W



Recessed casings
623



CRI 80

White	**E97651**	3000 K	3582 lm	**W**	Spot	**15**
		4000 K	3834 lm	**N**	Medium Flood	**30**
					Flood	**60**

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX
Osram, Non-dim 24V DC, 120-277VAC, Wet location

Admiral_POP | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 6W 630mA



RGB

Recessed casings
623

White	E93503	RGB	Z

Spot	15
Medium Flood	30
Flood	60
Wide Flood	12

Power supply options (remote only)

PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable,
DMX control not included/Ordered separately
50W for 1-4 Fixtures

Admiral_POP | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 18W 630mA





RGB

Recessed casings
623

White	E93505	RGB	Z

Spot	15
Medium Flood	30
Flood	60
Wide Flood	12

Power supply options (remote only)

PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable
DMX control not included/Ordered separately
50W for 1-6 Fixtures

Admiral_POP | Underwater luminaires | powerLED | Submersible | Driver remote | Walkover | 27W 500mA





RGB

Recessed casings
623

White	E93506	RGB	Z

Spot	15
Medium Flood	30
Flood	60
Wide Flood	12

Power supply options (remote only)

PWR50W-500

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable,
DMX control not included/Ordered separately
50W for 1 Fixture

Admiral | Recessed casing

type	Ø in	h. in	suitable for	
PVC	3	5.2	Admiral 2W	**E84945**

Admiral | Watertight Recessed casing

type	Ø in	h. in	suitable for	
PVC	3	4.5	Admiral 2W	**E84990**

Admiral | Watertight Recessed casing

type	Ø in	h. in	suitable for	
PVC	5.1	5.4	Admiral 6W	**E84937**

Admiral | Recessed casing

type	Ø in	h. in	suitable for	
PVC	5.1	5.4	Admiral 6W	**E84942**

Admiral | Watertight Recessed casing

type	Ø in	h. in	suitable for	
PVC	7.5	4.1	Admiral 12W - 14W	**E84938**

Admiral | Recessed casing

type	Ø in	h. in	suitable for	
PVC	7.5	4.1	Admiral 12W - 14W	**E84943**

Sub | Watertight Recessed casing

type	Ø in	h. in	suitable for	
PVC	11.1	5.3	Pop 27W	**E84939**

Sub | Recessed casing

type	Ø in	h. in	suitable for	
PVC	11.1	5.3	Admiral_I 27W	**E84944**
PVC	11.1	5.3	Admiral_JI 18W	**E84944**

Admiral | Watertight Recessed casing

type	Ø in	h. in	suitable for	
PVC	3	3.7	Suelo 1W	**E99678**

Admiral | Recessed casing

type	Ø in	h. in	suitable for	
PVC	3	4.8	Suelo Pro 1W	**E99679**

Sub | Watertight Recessed casing

type	Ø in	h. in	suitable for	
PVC	3	3.7	Sub	**E98148**

Sub | Recessed casing

type	Ø in	h. in	suitable for	
PVC	2.8	2.1	Sub	**E98060**