



| BON-BOSS-RE-...-GE... | | | | |
|---|-----|---------------------------------------|------------|------------|
| Delivered Lumens - General Illumination | | | | |
| | | Size [Wattage] | | |
| | | 8 [11 CC] | 20 [11 CC] | 32 [11 CC] |
| CCT | 30- | 580 | 580 | 580 |
| | 40- | 627 | 627 | 627 |
| | | Polar Plot / Cone Of Light Multiplier | | |
| | | 8 [11 CC] | 20 [11 CC] | 32 [11 CC] |
| | | 1.00 | 1.00 | 1.00 |

BUG Rating: B0-U0-G0 – Type VS Quadrilateral Symmetry

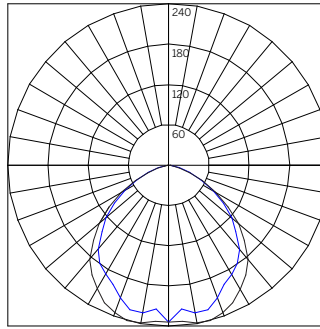

ISOILLUMINANCE DIAGRAM - 20W 3000K
General Illumination¹
BON-BOSS-RE-32-11-CC-30-GE

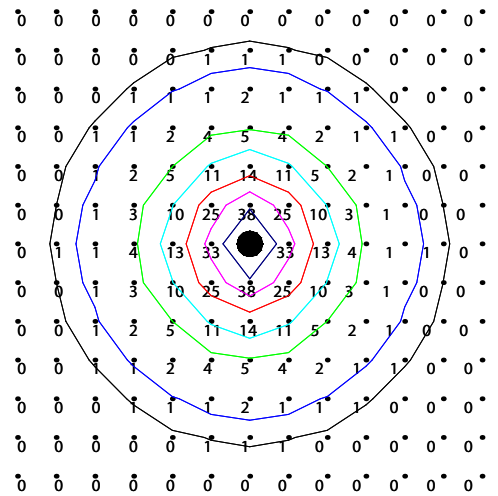

| Value [Fc] | Color | Value [Fc] | Color |
|------------|-------|------------|------------|
| 0.5 | Black | 20 | Red |
| 1 | Blue | 30 | Magenta |
| 5 | Green | 40 | Dark Blue |
| 10 | Cyan | 50 | Dark Green |

¹ Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.