



**General:** Bond Pro is a family of bollards whose discreetly elegant look makes them harmoniously fit within every environment. The light source hidden in the top of the bollard and screened by the round flange creates a full cutoff output (Dark Sky Compliant). This feature makes its output never invasive and a perfect blend with its surroundings. Bond Pro is available in three different sizes and multiple finishes.

**Fixture Body:** Corrosion Resistant 6060 Aluminum.

**Diffuser:** Polyethylene.

**Mounting:** Fixture comes with standard a Powder Coated Iron Base. Ground pegs available upon request.

**Dimensions/Weight:** 8.1" (4.19 lbs) – 19.9" (5.78 lbs) – 31.7" (8.31 lbs)

**Driver:** Remote, 120-277V Dimmable 0-10V.

**Wattages:** 11W (All Sizes)

**Cable:** Fixture comes with 3.28' of power cable.

**Safety features:** Fixture is equipped with Electrostatic discharge protection and Surge Protection.

**IP rating:** IP65 for protection against dust and moderate water jets from any angle.

**IK rating:** IK 07

**ETL Certification:** ETL, wet location

**Optics:** Fixed, Round Emission.


**Color temperatures:** 3000K – 4000K.

**CRI:** 80+

**BUG Rating:** B0-U0-G0 – Type VS Quadrilateral Symmetry

**Lumen Maintenance:** L70 projections tested at Tj 65° C and Ta 25°.

**Warranty:** 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

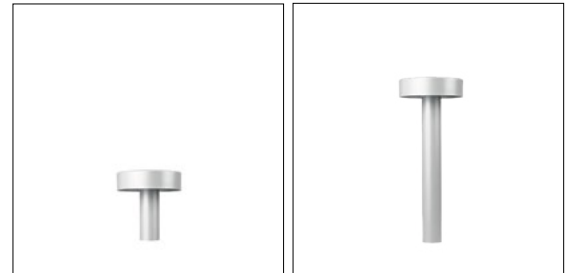

8.1" (10.8W)

19.9" (10.8W)



31.7" (10.8W)


| Delivered Lumens <sup>*</sup> | 8.1" | 19.9" | 31.7" |
|-------------------------------|------|-------|-------|
| GE                            | 591  | 591   | 591   |

\*Values shown for 3000K

| Ordering Information |  |                     |                                      |   |                          |                           |   |   |                        |
|----------------------|--|---------------------|--------------------------------------|---|--------------------------|---------------------------|---|---|------------------------|
| Product              | Finish   | Type                | Size                                 | Wattage/Operation                         | Color Temp               | Optic                     | + | Driver (Required) <sup>1</sup>            | Accessory <sup>2</sup> |
| BON = Bond Pro       | BOBL = Bollard, Black<br>BODB = Bollard, Dark Brown<br>BOSS = Bollard, Stainless Steel<br>BOGR = Bollard, Gray | RE = Round Emission | 8 = 8.1"<br>20 = 19.9"<br>32 = 31.7" | 11 CC = 10.8W / Constant Current (300 mA) | 30 = 3000K<br>40 = 4000K | GE = General Illumination |   | ECO30W-300<br>SOLO50W-300<br>SOLO100W-300 | Anchor Bolts E14931    |

<sup>1</sup> See page 2

## 8.1" 10.8W 300mA




### DRIVER OPTIONS (pick one)

#### C.C. Power supply options (remote only)

| ECO30W-300                                     | SOLO50W-300  | SOLO100W-300  |
|--|--|---|
| 0-10V EldoLED<br>ECOdrive 30W<br>for 1 fixture | 0-10V EldoLED<br>SOLOdrive 50W<br>for 1-2 fixtures | 0-10V EldoLED<br>SOLOdrive 100W<br>for 1-4 fixtures |

## 19.9" 10.8W 300mA




### DRIVER OPTIONS (pick one)

#### C.C. Power supply options (remote only)

| ECO30W-300                                     | SOLO50W-300  | SOLO100W-300  |
|--|--|---|
| 0-10V EldoLED<br>ECOdrive 30W<br>for 1 fixture | 0-10V EldoLED<br>SOLOdrive 50W<br>for 1-2 fixtures | 0-10V EldoLED<br>SOLOdrive 100W<br>for 1-4 fixtures |

## 31.7" 10.8W 300mA



### DRIVER OPTIONS (pick one)

#### C.C. Power supply options (remote only)

| ECO30W-300                                     | SOLO50W-300  | SOLO100W-300  |
|--|--|---|
| 0-10V EldoLED<br>ECOdrive 30W<br>for 1 fixture | 0-10V EldoLED<br>SOLOdrive 50W<br>for 1-2 fixtures | 0-10V EldoLED<br>SOLOdrive 100W<br>for 1-4 fixtures |

### Accessories



**E14931**  
Anchor Bolts