


envelope_w



Named for its shape, the Envelope path marker's elegant lines and finish make it particularly suitable for foot traffic areas, and provide an attractive addition to walls.




Materials

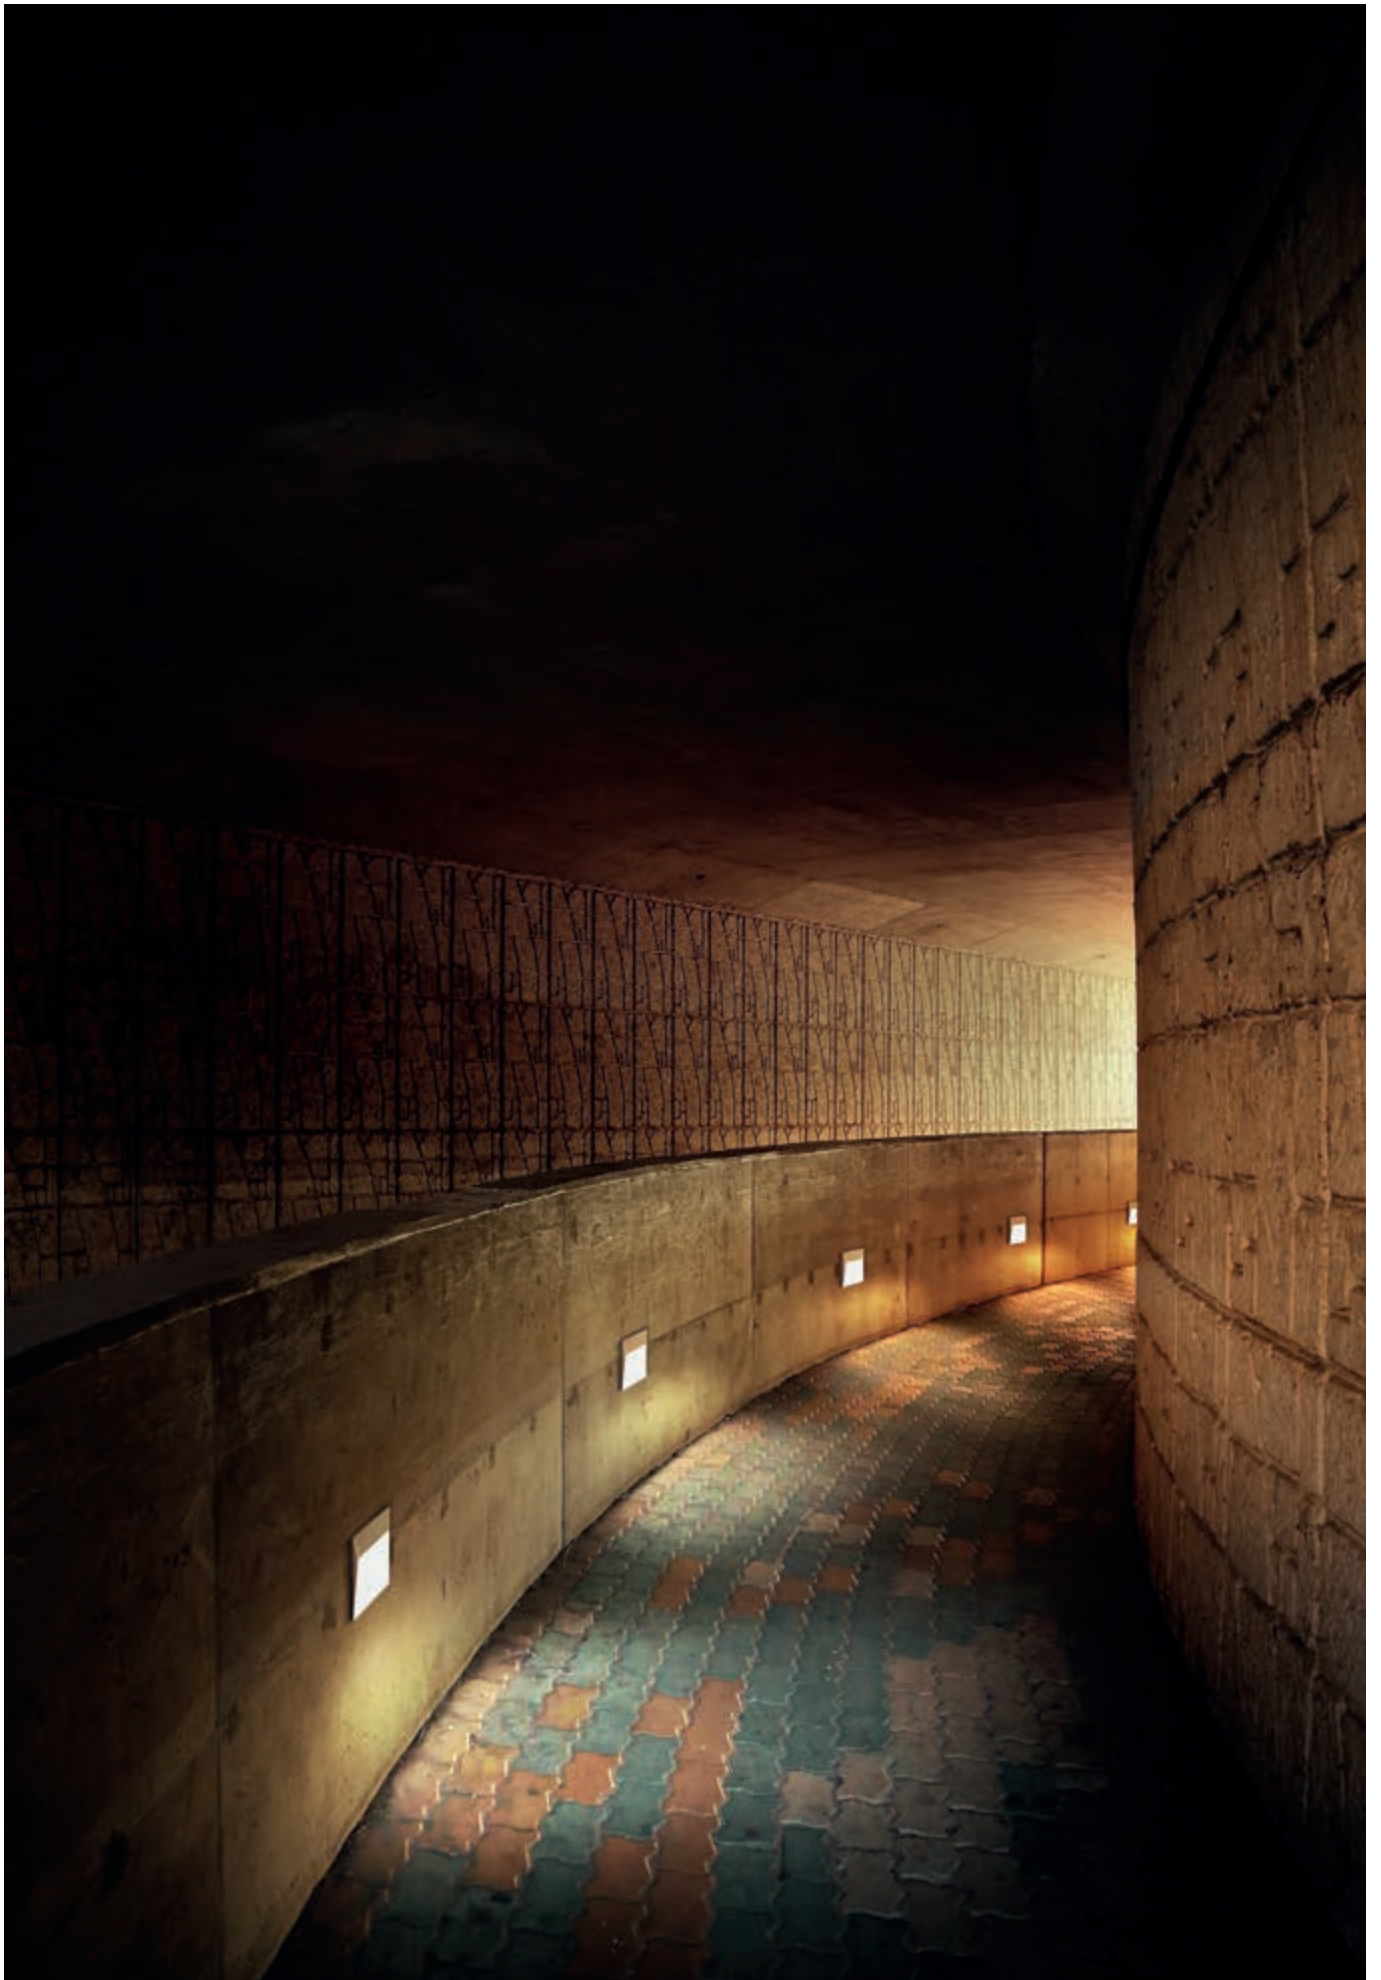Aluminum body



envelope_W range



	Envelope_1	Envelope_W	Envelope_W Recessed
1 W	1.6 x 1.6 in	4.7 x 3.5 in	
7 W	-	-	6.7 x 6.6 in
11 W / 17 W	-	-	10.6 x 4.9 in
Finish			
topLED	2700K 3000K 4000K	3000K 4000K	3000K 4000K
Optics	Asymmetric	Asymmetric	Asymmetric
Driver	Remote 0-10V or Non-dim	Remote 0-10V or Non-dim	Remote 0-10V or Non-dim

Simple, elegant and minimalist

Envelope consists of a single compact element, with the screws hidden from view. The bayonet fitting makes it quick and easy to install, and the casing can be concealed for even greater aesthetic impact. Can also be fitted using a bracket.



Finishes


Choice of four:

- white RAL9003
- classic grey RAL9006
- anthracite grey RAL7021
- dark brown




Recessed optic, asymmetric design

The recessed source is hidden from view, so the unit offers full cutoff: all you see is the clean, attractive beam. The slightly asymmetric design directs it towards the path.

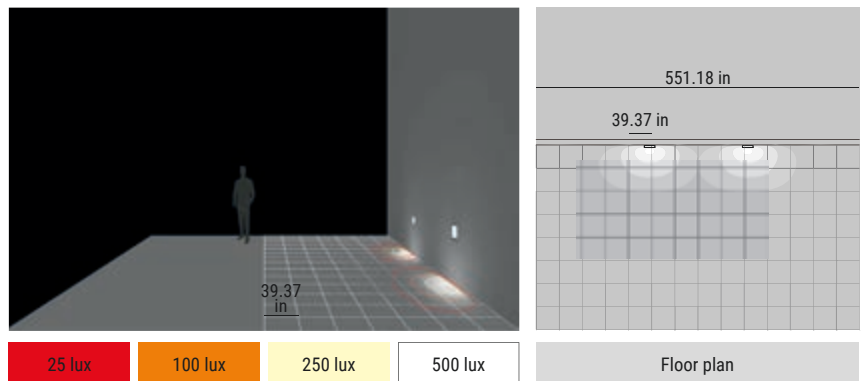

Envelope_1 | Path-marker | powerLED | Wet location | Driver remote | 1W 350mA



Efficiency - CRI 80

White	E96976	2700 K	136 lm	M	Asymmetric	07
Grey	E96978	3000 K	145 lm	W		
BK Grey	E80605	3500 K	145 lm	T		
DarkBrown	E96979	4000 K	155 lm	N		
Black	E96977					
Brass	E83613					


Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EidoLED ECOdrive 30W for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W for 1-20 fixtures	0-10V EidoLED SOLOdrive 100W for 1-40 fixtures

Recessed casing

E84336 Masonry outer casing	E84915 Poured-concrete outer casing
--	--

Envelope_W Surface Mounted | Path-marker | 24 V | topLED | Wet location | Driver remote | 1W



CRI 80

White	E97170	3000 K	54 lm	W	Asymmetric	07
Grey	E97172	4000 K	60 lm	N		
BK Grey	E81341					
DarkBrown	E81342					


Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location
--	--

Mounts to a 2"x4" j-box (by others)

technical
information

Envelope_W Wall-Recessed | Path-marker | 24 V | topLED | Wet location | Driver remote | 7W



CRI 80

White	E81343	3000 K	619 lm	W	Asymmetric	07
Grey	E81291	4000 K	643 lm	N		
BK Grey	E81290					
DarkBrown	E81292					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Recessed casing



E99744

Outer casing for brickwork-mounted installation

Envelope_W Wall-Recessed | Path-marker | 24 V | topLED | Wet location | Driver remote



CRI 80 - 11W

White	E81344	3000 K	1032 lm	W	Asymmetric	07
Grey	E81294	4000 K	1073 lm	N		
BK Grey	E81293					
DarkBrown	E81295					

CRI 80 - 17W

White	E81512	3000 K	1600 lm	W	Asymmetric	07
Grey	E81510	4000 K	1684 lm	N		
BK Grey	E81509					
DarkBrown	E81511					

Power supply options (remote only)



OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure


OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Solution with outer casing



Recessed casing



E99745

Outer casing for brickwork-mounted installation