

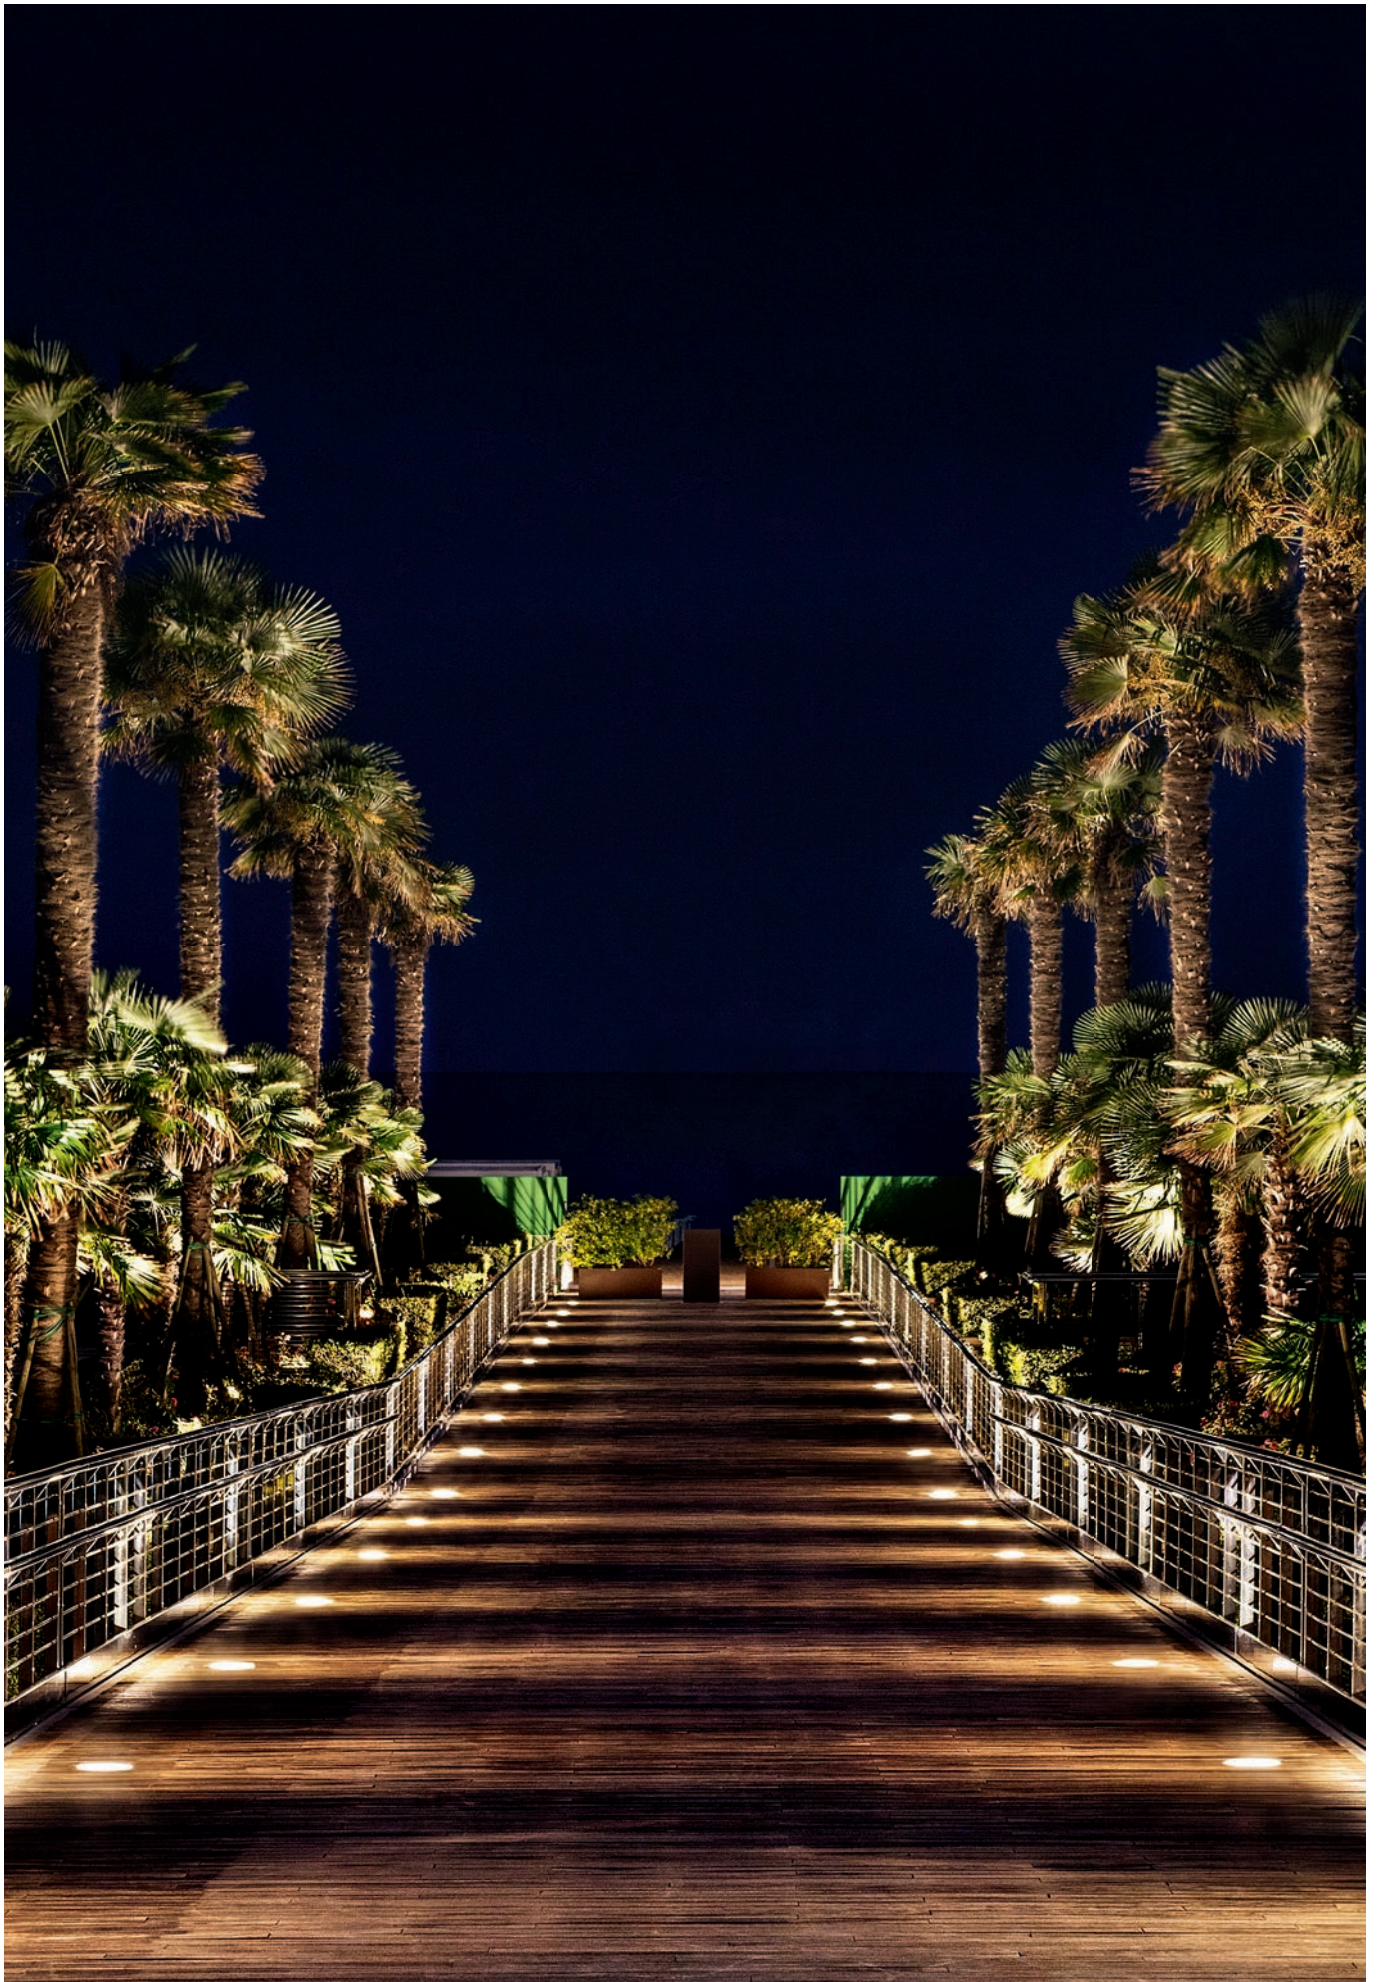
nicro




Nicro is designed for any type of flooring. Its tempered glass diffuser, up to 0.5 inches thick, combines durability with reliability. The black screenprinted optics minimise dazzle.

Materials

Anodized aluminum or AISI 316 stainless steel body
Tempered glass diffuser




Nicro_R | Drive-over spotlight | powerLED | Wet location | Driver remote | Drive over


0.6W 220mA - CRI 80

Anod. Al.	E97898	2700 K	88 lm	M	Wide Flood	12
		3000 K	94 lm	W	General	00
		4000 K	101 lm	N		

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures



Nicro_R | Drive-over spotlight | powerLED | Wet location | Driver remote | Drive over


1W 350mA - CRI 80

Anod. Al.	E93363	2700 K	136 lm	M	Narrow Spot	08
		3000 K	145 lm	W	Spot	15
		4000 K	155 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures


INCLUDED
Outer casing for
ground-mounting
installation
Nicro_Q | Drive-over spotlight | powerLED | Wet location | Driver remote | Drive over


0.6W 220mA - CRI 80

Anod. Al.	E97899	2700 K	85 lm	M	Wide Flood	12
		3000 K	85 lm	W	General	00
		4000 K	90 lm	N		

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures


Nicro_Q | Drive-over spotlight | powerLED | Wet location | Driver remote | Drive over


1W 350mA - CRI 80

Anod. Al.	E93458	2700 K	130 lm	M	Narrow Spot	08
		3000 K	130 lm	W	Spot	15
		4000 K	138 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

INCLUDED
Outer casing for
ground-mounting
installation

Nicro_I | Drive-over spotlight | powerLED | Wet location | Driver remote | Drive over



E93457



E97900

0.6W 220mA - CRI 80

Steel	E97900	2700 K	88 lm	M	Wide Flood	12
		3000 K	94 lm	W	General	00
		4000 K	101 lm	N		

Power supply options (remote only)

ECO30W-220

0-10V EldoLED ECOdrive
30W for 1-10 fixtures

SOLO50W-220

0-10V EldoLED SOLOdrive
50W for 1-20 fixtures

SOLO100W-220

0-10V EldoLED SOLOdrive
100W for 1-40 fixtures

1W 350mA - CRI 80

Steel	E93457	2700 K	136 lm	M	Narrow Spot	08
		3000 K	145 lm	W	Spot	15
		4000 K	155 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive
30W for 1-10 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-20 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-40 fixtures

Recessed casings

2.16	2.36	Anod. Al.	E98250	2.05	Anod. Al.	E98251
		Steel	E98104	3.7 / 5	Steel	E98105
	2.12				4.13	

Nicro_I | Drive-over spotlight | powerLED | Wet location | Driver remote | Drive over



E93459



E97901

1.9W 220mA - CRI 80

Steel	E97901	2700 K	264 lm	M	Wide Flood	12
		3000 K	282 lm	W	General	00
		4000 K	303 lm	N		

Power supply options (remote only)

ECO30W-220

0-10V EldoLED ECOdrive
30W for 1-10 fixtures

SOLO50W-220

0-10V EldoLED SOLOdrive
50W for 1-20 fixtures

SOLO100W-220

0-10V EldoLED SOLOdrive
100W for 1-40 fixtures

3W 350mA - CRI 80

Steel	E93459	2700 K	408 lm	M	Spot	15
		3000 K	435 lm	W	Medium Flood	30
		4000 K	465 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive
30W for 1-10 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-20 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-40 fixtures

Recessed casings

2.56	3.54	Anod. Al.	E98252	3.23	Anod. Al.	E98253
		Steel	E98106	4.01 / 5.27	Steel	E98107
	3.35				4.13	