


optiframe

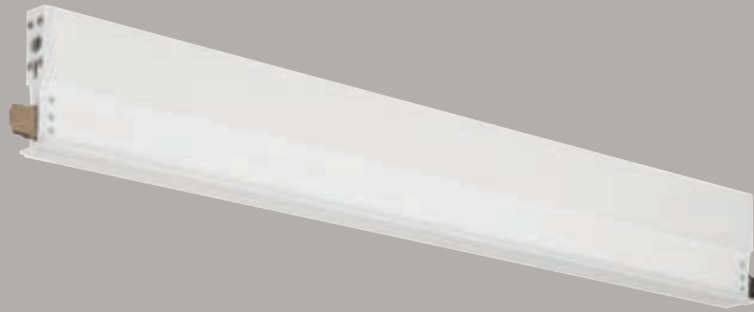

OptiFrame revolutionises office lighting concept. No ceiling fittings or large recessed casings, just light lines installed at the reticular structure of the dropped ceiling or recessed mounting, fully transparent when off. The light becomes a tapered sign with an almost null aesthetic impact. Lit, OptiFrame strikes for its stylish lines and refined OptiLight Technology patterns.

Materials

Aluminum body
PMMA diffuser

Double design

They come in two versions, available both recess-mounted and replacing the dropped ceiling-mounted crosspiece. The model with extracted diffuser has a true light blade, a 1.77 in and just 0.16 in-thick PMMA profile, enhanced by the OptiLight Technology™ patterns. On the other hand, the flush-mounted model only shows the light effect of the flush-ceiling-mounted recessed diffuser, offering a sort of minimal light line.



OptiLight Technology™

The transparent PMMA surface has a special pattern consisting of laser micro-engravings which divert the photons conveying them bi-symmetrically, thus eliminating the occurrence of spill light and reducing glare drastically.




Modularity

Can be installed to replace the 23.62 in profile that forms the 23.62 x 23.62 modular dropped ceiling. Provided with special springs on the two extremities of the profile, the article is quick and safe to install. Several straight line modules allows to create continuous lines and light large offices and spaces.

Also available in the recess-mounted version: Both applications come with a minimal aesthetic impact: with the fixture off, the high degree of transparency of PMMA allows the diffuser to be concealed, just leaving a glimpse of the architectural cleanness of the dropped ceiling.



OptiFrame_M | Ceiling luminaires | topLED | Drive remote | 13W 350mA

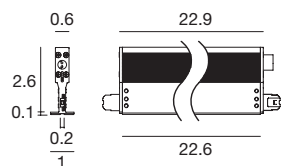

CRI 80


White	E95379	3000 K	2048 lm	W	General	00
Black	E95381	3500 K	2048 lm	T		
Grey	E95380	4000 K	2143 lm	N		
		5000 K	2143 lm	C		

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive
30W for 1 fixture

OptiFrame_MF | Ceiling luminaires | topLED | Driver remote | 13W 350mA



CRI 80


White	E93496	3000 K	2048 lm	W	General	00
Black	E93500	3500 K	2048 lm	T		
Grey	E93504	4000 K	2143 lm	N		
		5000 K	2143 lm	C		

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive
30W for 1 fixture

OptiFrame_C | Ceiling luminaires | topLED | Driver remote | 25W 700mA



CRI 80


White	E90435	3000 K	4096 lm	W	General	00
Black	E90436	3500 K	4096 lm	T		
Grey	E90437	4000 K	4286 lm	N		
		5000 K	4286 lm	C		

Power supply options (remote only)

SOLO50W-700

0-10V EldoLED SOLOdrive
50W for 1 fixture

OptiFrame_R | Ceiling luminaires | topLED | Driver remote | 25W 700mA



CRI 80

White	E90432	3000 K	4096 lm	W	General	00
Black	E90433	3500 K	4096 lm	T		
Grey	E90434	4000 K	4286 lm	N		
		5000 K	4286 lm	C		

Power supply options (remote only)

SOLO50W-700

0-10V EldoLED SOLOdrive
50W for 1 fixture