

orma_C



Orma_C is designed for small outdoor spaces: just a few centimetres deep, this high-tech downlight combines a minimal footprint with advanced lighting performance, a wide range of models and accessories to limit emissions.










Materials

Anodized aluminum body, or AISI 316 stainless steel



orma_c range



| | 4W | 8W / 9W | 12W |
|---|---|---|---|
| _C  | Ø 2.5in | Ø 3.8 in | Ø 5.4 in |
| _CJ  | Ø 2.5 in | Ø 3.8 in | Ø 5.4 in |
| Optic control Options |   |   |   |
| Finish | Stainless Steel/Black | Stainless Steel/Black | Stainless Steel/Black |
| CRI 80 | 2700K 3000K 4000K | 2700K 3000K 4000K | 2700K 3000K 4000K |
| Optics | 15° 30° 60° Asymmetric | 15° 30° 60° | 15° 30° 60° |
| Driver | Remote | Remote | Remote |
| Current | C.C. | C.C. 8W C.V. 9W | C.C. |
|  | 2.2 in | 3.4 in | 5 in |


Small overall dimensions

A small-footprint downlight, from 1.8 to barely 2 inch, with a small flange and helical optics designed to fit inside the body. This smart solution makes the product easier to install.




Visual comfort

Depending on how the light is positioned, its beam can be optimised using the appropriate accessory. The honeycomb filter screens secondary light and reduces direct glare, while maintaining the same high and diffuse quality. If the light is installed in a grazing position and you wish to light only part of the wall, you can use the darklight filter to section part of the beam and prevent direct glare even close to the source.


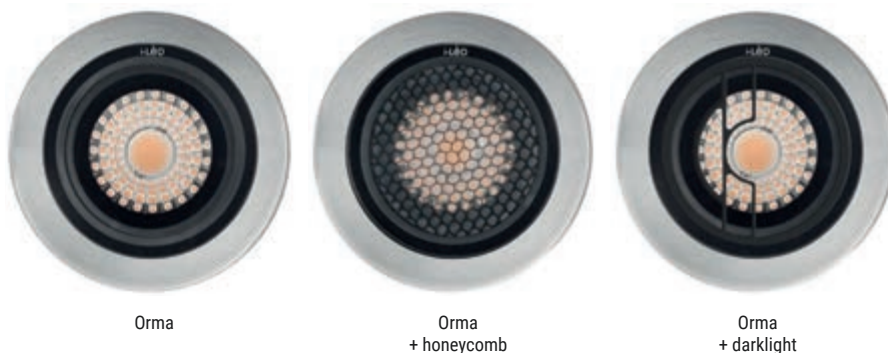


The range

A wide range of lighting options, including four optics: spot, medium flood, flood and elliptical. There are also three sizes. The Orma_C downlight range includes CJ tiltable versions, which can be adjusted with a screwdriver on the body of the luminaire.

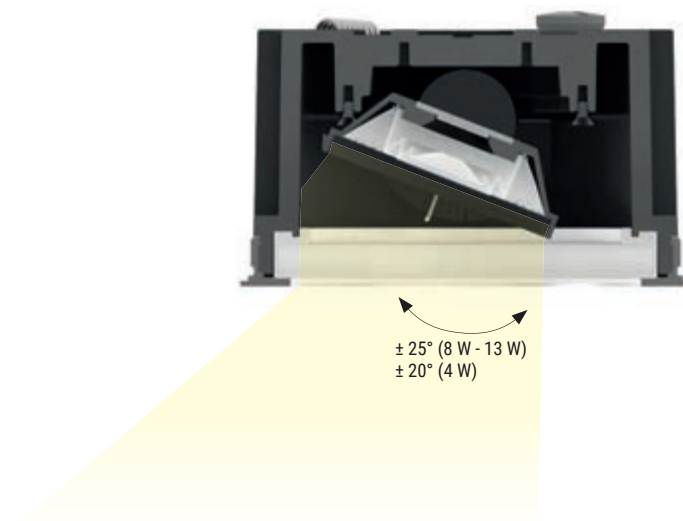

Orma_C | Downlight | arrayLED | Wet location | Driver remote | 4W 350mA



C.C. - 350mA

| | | | | | | |
|-----------|---------------|--------|--------|----------|--------------|-----------|
| Steel/Alu | E81223 | 2700 K | 490 lm | M | Spot | 15 |
| | | 3000 K | 490 lm | W | Medium Flood | 30 |
| | | 4000 K | 529 lm | N | Flood | 60 |
| | | | | | Asymmetric | 25 |



| | | | | | | |
|-----------|---------------|--------|--------|----------|--------------|-----------|
| Steel/Alu | E81224 | 2700 K | 490 lm | M | Spot | 15 |
| | | 3000 K | 490 lm | W | Medium Flood | 30 |
| | | 4000 K | 529 lm | N | Flood | 60 |



| | | | | | | |
|-----------|---------------|--------|--------|----------|--------------|-----------|
| Steel/Alu | E81225 | 2700 K | 490 lm | M | Spot | 15 |
| | | 3000 K | 490 lm | W | Medium Flood | 30 |
| | | 4000 K | 529 lm | N | Flood | 60 |

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdriver
30W for 1-3 fixtures



SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-6 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-12 fixtures

Orma_CJ | Downlight | arrayLED | Wet location | Driver remote | Adjustable | 4W 350mA

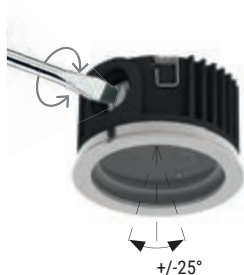

C.C. - 350mA

| | | | | | | |
|-----------|---------------|--------|--------|----------|--------------|-----------|
| Steel/Alu | E81241 | 2700 K | 490 lm | M | Spot | 15 |
| | | 3000 K | 490 lm | W | Medium Flood | 30 |
| | | 4000 K | 529 lm | N | Flood | 60 |

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdriver
30W for 1-3 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-6 fixtures



SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-12 fixtures

technical
information



Orma_C | Downlight | arrayLED | Wet location | Driver remote | 8W



C.V. version with converter integrated in the lamp body



C.C. - 220mA

| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81229 | 2700 K | 1088 lm | M | Spot | 15 |
| | | 3000 K | 1088 lm | W | Medium Flood | 30 |
| | | 4000 K | 1173 lm | N | Flood | 60 |



| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81230 | 2700 K | 1088 lm | M | Spot | 15 |
| | | 3000 K | 1088 lm | W | Medium Flood | 30 |
| | | 4000 K | 1173 lm | N | Flood | 60 |



| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81231 | 2700 K | 1088 lm | M | Spot | 15 |
| | | 3000 K | 1088 lm | W | Medium Flood | 30 |
| | | 4000 K | 1173 lm | N | Flood | 60 |

Power supply options (remote only)

| | | |
|---|---|---|
| ECO30W-220 0-10V EldoLED ECOdriver 30W for 1 fixture | SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures | SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures |
|---|---|---|

C.V. - 24V (9W)

| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81232 | 2700 K | 1209 lm | M | Spot | 15 |
| | | 3000 K | 1209 lm | W | Medium Flood | 30 |
| | | 4000 K | 1303 lm | N | Flood | 60 |



| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81233 | 2700 K | 1209 lm | M | Spot | 15 |
| | | 3000 K | 1209 lm | W | Medium Flood | 30 |
| | | 4000 K | 1303 lm | N | Flood | 60 |




| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81234 | 2700 K | 1209 lm | M | Spot | 15 |
| | | 3000 K | 1209 lm | W | Medium Flood | 30 |
| | | 4000 K | 1303 lm | N | Flood | 60 |


Power supply options (remote only)

| | |
|---|--|
| OT96-D010 Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location | OT96-JBX Osram, Non-dim 24V DC, 120-277VAC, Wet location |
|---|--|

Orma_CJ | Downlight | arrayLED | Wet location | Driver remote | Adjustable | 8W



C.V. version with converter integrated in the lamp body

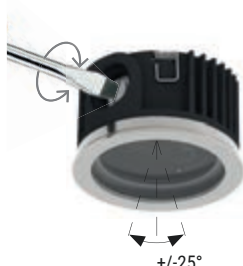

C.C. - 220mA

| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81243 | 2700 K | 1088 lm | M | Spot | 15 |
| | | 3000 K | 1088 lm | W | Medium Flood | 30 |
| | | 4000 K | 1173 lm | N | Flood | 60 |

Power supply options (remote only)


| | | |
|---|---|---|
| ECO30W-220 0-10V EldoLED ECOdriver 30W for 1 fixture | SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures | SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures |
|---|---|---|

C.V. - 24V (9W)


| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81244 | 2700 K | 1209 lm | M | Spot | 15 |
| | | 3000 K | 1209 lm | W | Medium Flood | 30 |
| | | 4000 K | 1303 lm | N | Flood | 60 |

Power supply options (remote only)

| | |
|---|--|
| OT96-D010 Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location | OT96-JBX Osram, Non-dim 24V DC, 120-277VAC, Wet location |
|---|--|



Orma_C | arrayLED | Wet location | Driver remote | 12W

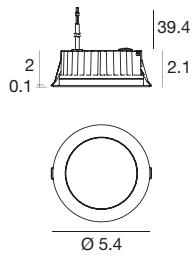

C.C. - 350mA

| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81235 | 2700 K | 1724 lm | M | Spot | 15 |
| | | 3000 K | 1724 lm | W | Medium Flood | 30 |
| | | 4000 K | 1854 lm | N | Flood | 60 |



| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81236 | 2700 K | 1724 lm | M | Spot | 15 |
| | | 3000 K | 1724 lm | W | Medium Flood | 30 |
| | | 4000 K | 1854 lm | N | Flood | 60 |



| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81237 | 2700 K | 1724 lm | M | Spot | 15 |
| | | 3000 K | 1724 lm | W | Medium Flood | 30 |
| | | 4000 K | 1854 lm | N | Flood | 60 |

Power supply options (remote only)

ECO30W-350


0-10V EldoLED ECOdriver
30W for 1 fixture

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-2 fixtures


SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-4 fixtures



C.V. version with converter integrated in the lamp body

Orma_CJ | arrayLED | Wet location | Driver remote | Adjustable | 12W

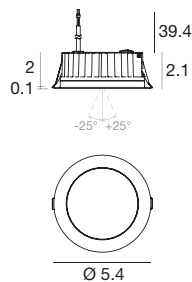

C.C. - 350mA

| | | | | | | |
|-----------|---------------|--------|---------|----------|--------------|-----------|
| Steel/Alu | E81245 | 2700 K | 1724 lm | M | Spot | 15 |
| | | 3000 K | 1724 lm | W | Medium Flood | 30 |
| | | 4000 K | 1854 lm | N | Flood | 60 |

Power supply options (remote only)



C.V. version with converter integrated in the lamp body

