

orma_C



Orma_C is designed for small outdoor spaces: just a few centimetres deep, this high-tech downlight combines a minimal footprint with advanced lighting performance, a wide range of models and accessories to limit emissions.

Materials

Anodized aluminum body, or AISI 316 stainless steel





	4 W	8 W	13 W
_C 	Ø 2.5in	Ø 3.8 in	Ø 5.4 in
_CJ 	Ø 2.5 in	Ø 3.8 in	Ø 5.4 in
Optic control Options			
Finish	Stainless Steel/Black	Stainless Steel/Black	Stainless Steel/Black
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optics	15° 30° 60° Asymmetric	15° 30° 60°	15° 30° 60°
Driver	Remote	Remote	Remote
Current	C.C.	C.C. C.V.	C.C. C.V.
	2.2 in	3.4 in	5 in

Small overall dimensions

A small-footprint downlight, from 1.8 to barely 2 inch, with a small flange and helical optics designed to fit inside the body. This smart solution makes the product easier to install.




Visual comfort

Depending on how the light is positioned, its beam can be optimised using the appropriate accessory. The honeycomb filter screens secondary light and reduces direct glare, while maintaining the same high and diffuse quality. If the light is installed in a grazing position and you wish to light only part of the wall, you can use the darklight filter to section part of the beam and prevent direct glare even close to the source.




The range

A wide range of lighting options, including four optics: spot, medium flood, flood and elliptical. There are also three sizes. The Orma_C downlight range includes CJ tiltable versions, which can be adjusted with a screwdriver on the body of the luminaire.

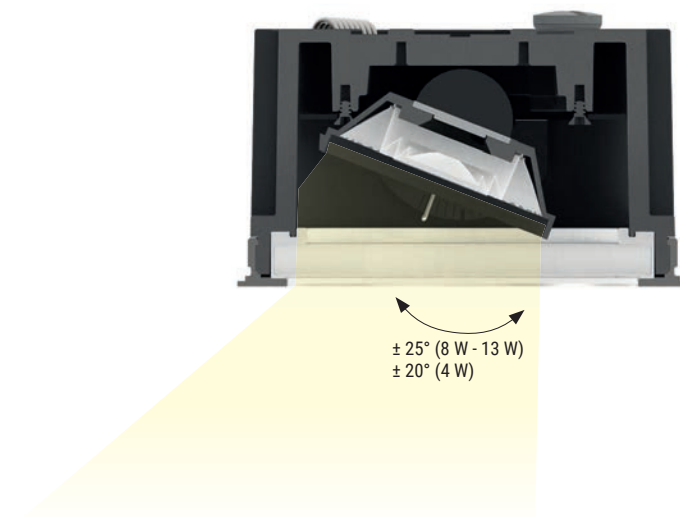

Orma_C | Downlight | arrayLED | Wet location | Driver remote | 4W 350mA



C.C. - 350mA

Steel/Alu **E81223**

2700 K	490 lm	M	Spot	15
3000 K	490 lm	W	Medium Flood	30
4000 K	529 lm	N	Flood	60
Asymmetric				25



Steel/Alu **E81224**

2700 K	490 lm	M	Spot	15
3000 K	490 lm	W	Medium Flood	30
4000 K	529 lm	N	Flood	60



Steel/Alu **E81225**

2700 K	490 lm	M	Spot	15
3000 K	490 lm	W	Medium Flood	30
4000 K	529 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdriver
30W for 1-3 fixtures


SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-6 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-12 fixtures

Orma_CJ | Downlight | arrayLED | Wet location | Driver remote | Adjustable | 4W 350mA



C.C. - 350mA

Steel/Alu **E81241**

2700 K	490 lm	M	Spot	15
3000 K	490 lm	W	Medium Flood	30
4000 K	529 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350


0-10V EldoLED ECOdriver
30W for 1-3 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-6 fixtures


SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-12 fixtures






Orma_C | Downlight | arrayLED | Wet location | Driver remote | 8W



C.V. version with converter integrated in the lamp body



C.C. - 220mA

Steel/Alu	E81229	2700 K	1088 lm	M	Spot	15
		3000 K	1088 lm	W	Medium Flood	30
		4000 K	1173 lm	N	Flood	60



Steel/Alu	E81230	2700 K	1088 lm	M	Spot	15
		3000 K	1088 lm	W	Medium Flood	30
		4000 K	1173 lm	N	Flood	60



Steel/Alu	E81231	2700 K	1088 lm	M	Spot	15
		3000 K	1088 lm	W	Medium Flood	30
		4000 K	1173 lm	N	Flood	60

Power supply options (remote only)

ECO30W-220

0-10V EldoLED ECOdriver
30W for 1 fixture

SOLO50W-220

0-10V EldoLED SOLOdrive
50W for 1-2 fixtures

SOLO100W-220

0-10V EldoLED SOLOdrive
100W for 1-4 fixtures

C.V. - 24V

Steel/Alu	E81232	2700 K	1209 lm	M	Spot	15
		3000 K	1209 lm	W	Medium Flood	30
		4000 K	1303 lm	N	Flood	60



Steel/Alu	E81233	2700 K	1209 lm	M	Spot	15
		3000 K	1209 lm	W	Medium Flood	30
		4000 K	1303 lm	N	Flood	60



Steel/Alu	E81234	2700 K	1209 lm	M	Spot	15
		3000 K	1209 lm	W	Medium Flood	30
		4000 K	1303 lm	N	Flood	60

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V
DC, 120-277VAC, supplied in a Dry
location


OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC,
Wet location

Orma_CJ | Downlight | arrayLED | Wet location | Driver remote | Adjustable | 8W



C.V. version with converter integrated in the lamp body



C.C. - 220mA

Steel/Alu	E81243	2700 K	1088 lm	M	Spot	15
		3000 K	1088 lm	W	Medium Flood	30
		4000 K	1173 lm	N	Flood	60

Power supply options (remote only)

ECO30W-220

0-10V EldoLED ECOdriver
30W for 1 fixture

SOLO50W-220

0-10V EldoLED SOLOdrive
50W for 1-2 fixtures

SOLO100W-220

0-10V EldoLED SOLOdrive
100W for 1-4 fixtures

C.V. - 24V

Steel/Alu	E81244	2700 K	1209 lm	M	Spot	15
		3000 K	1209 lm	W	Medium Flood	30
		4000 K	1303 lm	N	Flood	60

Power supply options (remote only)



OT96-D010

Osram, 10% 0-10V dim, 96W, 24V
DC, 120-277VAC, supplied in a Dry
location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC,
Wet location

Orma_C | arrayLED | Wet location | Driver remote | 13W



C.V. version with converter integrated in the lamp body



C.C. - 350mA

Steel/Alu	E81235	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60



Steel/Alu	E81236	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60



Steel/Alu	E81237	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdriver
30W for 1 fixture

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-2 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-4 fixtures

C.V. - 24V

Steel/Alu	E81238	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60



Steel/Alu	E81239	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60



Steel/Alu	E81240	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24V
DC, 120-277VAC, supplied in a Dry
location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC,
Wet location

Orma_CJ | arrayLED | Wet location | Driver remote | Adjustable | 13W



C.V. version with converter integrated in the lamp body



C.C. - 350mA

Steel/Alu	E81245	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdriver
30W for 1 fixture

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-2 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-4 fixtures

C.V. - 24V

Steel/Alu	E81246	2700 K	1724 lm	M	Spot	15
		3000 K	1724 lm	W	Medium Flood	30
		4000 K	1854 lm	N	Flood	60

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V
DC, 120-277VAC, supplied in a Dry
location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC,
Wet location

