

pool




The Pool circular lamps range of products allows obtaining highly scenographic compositions fully exploiting the simplicity of the circle, the archetype shape homogeneously filled and highlighted by the light. Though it comes with a practical design, Pool surprisingly arouses emotions.

Materials

Aluminum body

Opaline polycarbonate diffuser



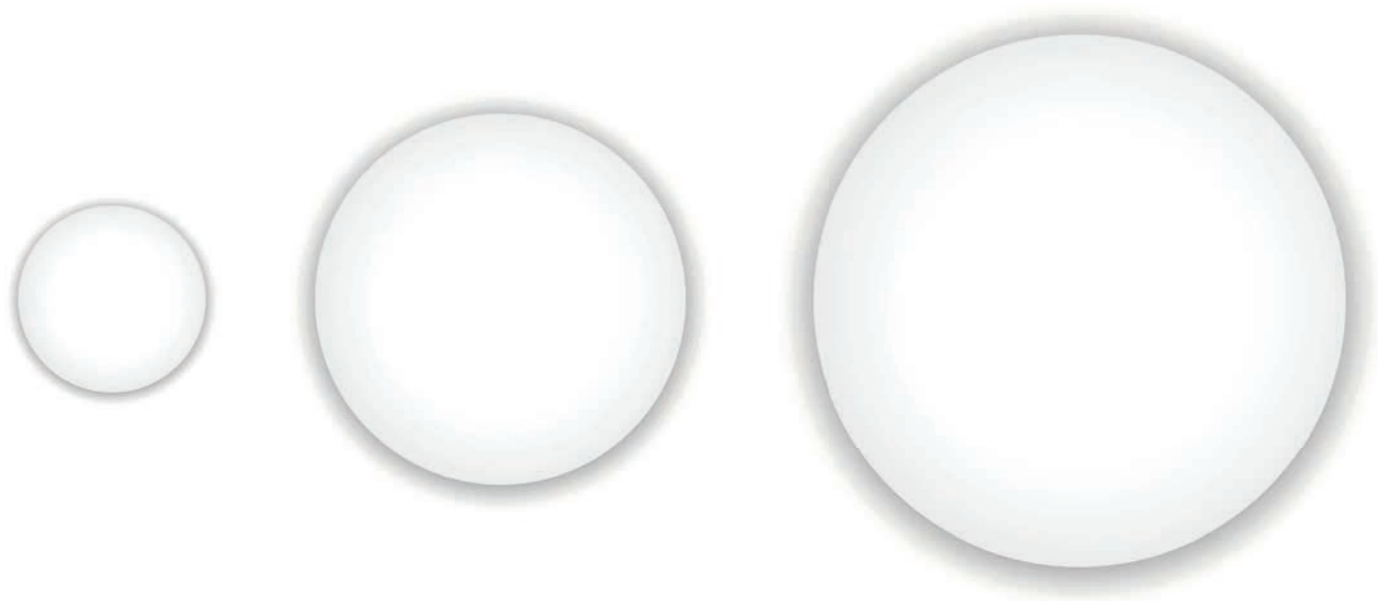

	<div>C</div>	<div>S</div>
Ø 13.9 in	20 W	20 W
Finish	<div></div>	<div></div>
CRI 80	3000K 3500K 4000K	3000K 3500K 4000K
Optics	General	General
Electronics	On/Off	On/Off


Furnishing with light

Light technology meets design precision. Visual comfort finds its most rational form, exploiting the simplicity of pure geometry to create a scenographic effect.

Low thickness

Application flushed with the ceiling

Perfect light homogeneity

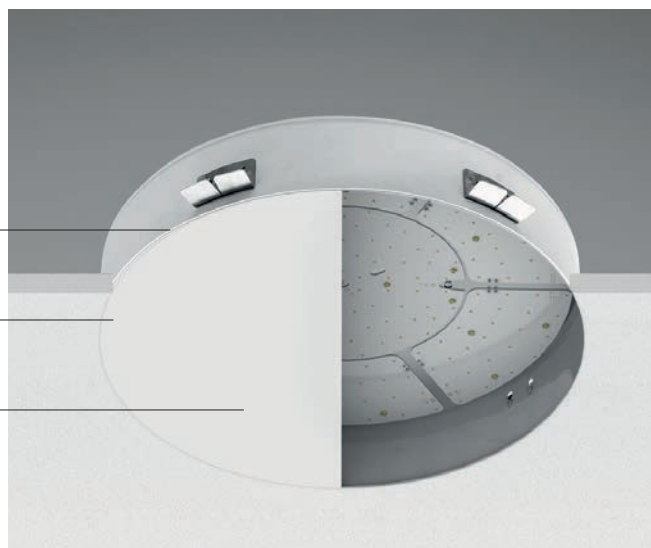

Multiple installation

Pool offers a range of products capable of meeting any project needs; irrespective of the type of installation required (recessed, surface of suspension) the body is fully concealed from view, while the slim polycarbonate diffuser offers low luminance, which translates into a soft and comfortable light; or even more it creates a striking light circle, in the version with perimeter circle.




Low thickness for
flushed installation


Perfect light
homogeneity

Controlled emission

The opaline polycarbonate diffuser guarantees full control of the light emission, thus allowing to combine and direct the photons emitted by the light source without lenses or filters. Visually, the effect is cosy, the light appears soft and well diffused.

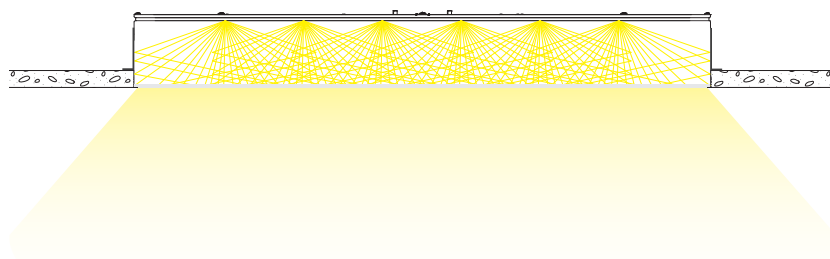

Pool_C | Recessed lights | topLED | Driver remote | 20W 500mA

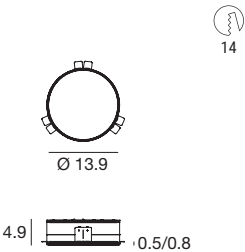


ON/OFF - CRI 80

White	E62931	3000 K	2730 lm	W	General	00
		3500 K	2730 lm	T		
		4000 K	2925 lm	N		

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Pool_S | Ceiling Lights | topLED | Driver remote | 20W 500mA



ON/OFF - CRI 80

White	E62911	3000 K	2730 lm	W	General	00
		3500 K	2730 lm	T		
		4000 K	2925 lm	N		

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

