








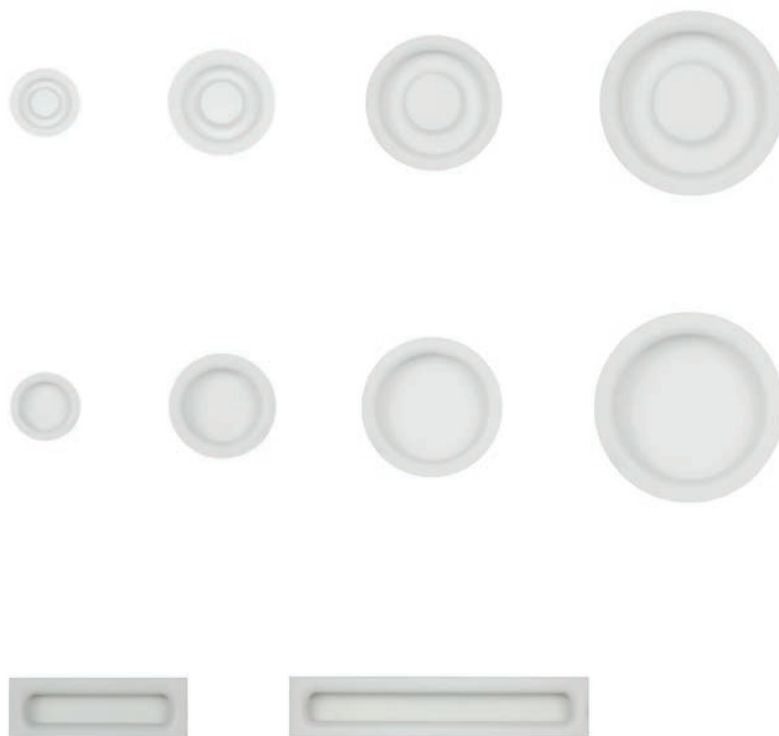


rada range



	8 W	12 W	18 W	23 W	25 W
_R 	Ø 4.57 in	Ø 6.97 in	Ø 9.17 in	-	Ø 12.2 in
_RO 	Ø 4.57 in	Ø 6.97 in	Ø 9.17 in	-	Ø 12.2 in
_Q 	-	8.35 x 2.87 in	-	14.25 x 2.87 in	-
Finish					
CRI 80	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
Optics	General	General	General	General	General
Driver	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V
	4.2 in (_R / _RO)	6.7 in (_R / _RO) 8 x 2.4 in (_Q)	8.8 in (_R / _RO)	13.9 x 2.4 in (_Q)	11.9 in (_R / _RO)


Visual comfort

The perimeter LED circuit, placed in the inner part of the circular frame and concealed from view, directs the light upwards; this is collected by the dome reflector made of optical white painted aluminum, which redistributes it in the environment. The final effect corresponds to an indirect and diffused, very soft lighting. The total absence of glare allows direct observation of the product without any discomfort for the eyes.



Oblique diffusion

Due to the specifically studied internal reflections, Rada offers a diffusion almost oblique to the ceiling, distributing the light in the entire surrounding environment.

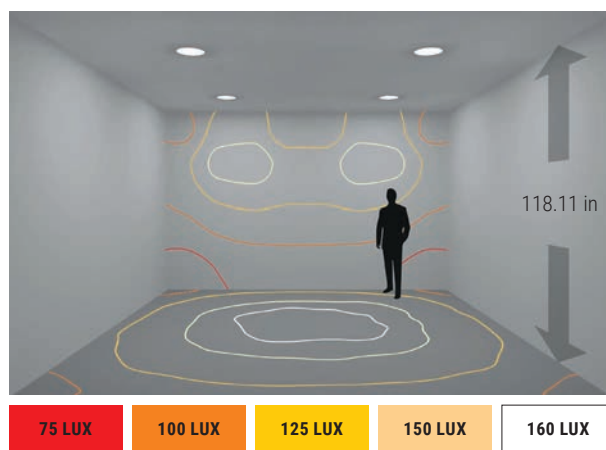


Shadow control

The principle of indirect light offers exceptional control of the shadows in the environments. Multiple and clear-cut projections disappear leaving for a soft and diffused shadow.



Rada_R | Downlights | topLED | Driver remote | 8W 220mA



 4.2

Efficiency - CRI 80

White	E91992	2700 K	955 lm	M	General	00
		3000 K	1022 lm	W		
		3500 K	1022 lm	T		
		4000 K	1070 lm	N		

Power supply options (remote only)

ECO30W-220

0-10V EldoLED ECOdrive
30W
for 1 fixture


SOLO50W-220

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-220

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

Rada_R | Downlights | topLED | Driver remote | 12W 350mA



 6.7

Efficiency - CRI 80

White	E91996	2700 K	1642 lm	M	General	00
		3000 K	1680 lm	W		
		3500 K	1680 lm	T		
		4000 K	1795 lm	N		

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive
30W
for 1 fixture


SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

Rada_R | Downlights | topLED | Driver remote | 18W 500mA



8.8

Efficiency - CRI 80


White	E92000	2700 K	2462 lm	M	General	00
		3000 K	2520 lm	W		
		3500 K	2520 lm	T		
		4000 K	2693 lm	N		



Power supply options (remote only)

ECO30W-500 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-500 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-500 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

Rada_R | Downlights | topLED | Driver remote | 25W 700mA



11.9

Efficiency - CRI 80


White	E92004	2700 K	3283 lm	M	General	00
		3000 K	3360 lm	W		
		3500 K	3360 lm	T		
		4000 K	3590 lm	N		




Power supply options (remote only)

SOLO50W-700 0-10V EldoLED SOLOdrive 50W for 1 fixture	SOLO100W-700 0-10V EldoLED SOLOdrive 100W for 1-3 fixtures
---	--


E92004W00




Photometric curve



Light beam

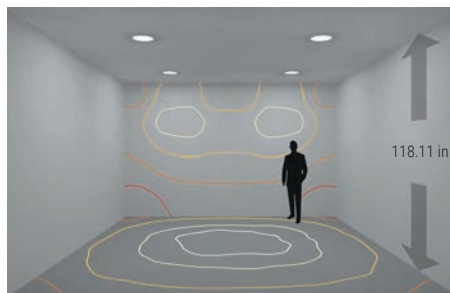

75 LUX 100 LUX 125 LUX 150 LUX 160 LUX



Floor plan