

SUELO Dual Optic Adjustable Vandal Resistant



General: Suelo is a family of round LED in-grades that includes a broad selection of specialty optics in multiple sizes and outputs, making it possible to find the perfect luminaire to illuminate outdoor architectural elements such as facades, columns as well as landscape and pathway lighting within the same product range.

The standard Suelo R provides maximum output and a selection of accessories to control the emission based on application needs. The Suelo PRO version has a more recessed optical chamber instead, to guarantee the best glare control without the need of any louver.

Lastly, Suelo is also available with a Dual Optic (Double, allowing to aim light at two different areas from one fixture) and in a Telescopic version, with an adjustable aluminum tube that elevates the fixture off the ground, to prevent growing vegetation from blocking the light.

Fixture Body: Open-pore Anodized and Powder Coated Die-Cast Aluminum.

Trim: Semi-Flush (Stainless Steel) Trim with Extra-clear Tempered glass.

Mounting/Casing: Black, ABS casings for Concrete installations.

Drive-over: Up to 5,511 lbs.

Dimensions/Weight: 6.7" (5.29 lbs) – 9.1" (7.94 lbs)

Driver: 120-277V Integral Non-Dim driver (6.7") - Integral 0-10V dim (9.1").

Wattages: 13.5W (6.7") – 26W (9.1")

Cable: Fixture comes with 3.28' of power cable and built-in Aquastop® (anti-wicking) system

IP rating: IP67 for temporary submersion up to 3.3' of depth for up to a maximum of 1 hr.

IK rating: IK 10

ETL Certification: ETL, wet location

Optics: Dual Optic, Individually Adjustable. Available in Spot – Flood – Wide Flood. Different optics within the same fixture available upon request.

Color temperatures: 2700K – 3000K – 4000K.

CRI: 80+


Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.



6.7" (13.5W)

9.1" (26W)

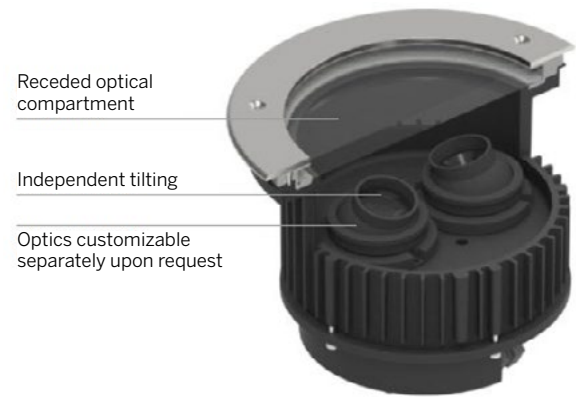

Recessed optical compartment

Independent tilting

Optics customizable separately upon request

Delivered Lumens*	6.7"	9.1"
SP	442	1746
FL	458	1879
WFL	413	1722

*Values shown for 3000K

Ordering Information							
Product	Trim	Type	Diameter	Wattage/Operation	Color Temp	Optic	Housing (Required) ¹
SUD = Suelo Dual Optic	SFSTVR = Semi-Flush St. Steel Vandal Resistant	A = Adjustable	67 = 6.7"	14 IND = 13.5W / Integral 120/277VAC Non-dim	27 = 2700K 30 = 3000K 40 = 4000K	SP = Spot FL = Flood WFL = Wide Flood	E84932 (6.7") E99794 (9.1")
			91 = 9.1"	26 ID = 26W / Integral 120/277VAC 0-10V dim			

¹ See page 2


SUELO Dual Optic Adjustable Vandal Resistant

7.9" 13.5W

Housing

Integral 120/277VAC Non-dim Driver

E84932
Recessed Housing

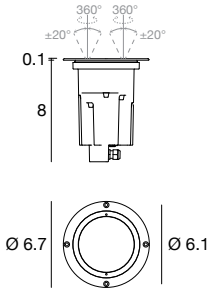

9.1" 26W

Housing

Integral 120/277VAC 0-10V dim Driver

E99794
Recessed Housing

