



| | | |
|---|-----|--|
| SAN-RWH-FR-...-GE... | | |
| Delivered Lumens - General Illumination | | |
| | | Diameter [Wattage] |
| | | 16 [1 CC] |
| CCT | 30- | 85 |
| | 40- | 90 |
| | 50- | 103 |
| | | Polar Plot / Cone Of Light Multiplier |
| | | 16 [1 CC] |
| | | 1.00 |



Beam Angle (0-180) = 180.0
Beam Angle (90-270) = 180.0


ISOILLUMINANCE DIAGRAM - 1W 3000K
General Illumination¹
SAN-RWH-FR-16-1-CC-30-GE²

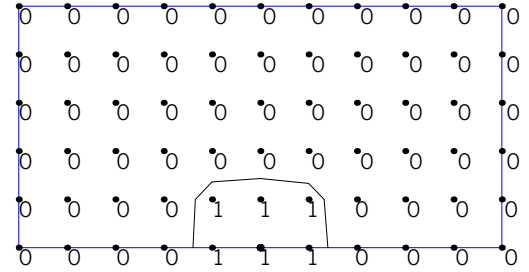

| Value [Fc] | Color | Value [Fc] | Color |
|------------|-------|------------|------------|
| 0.5 | Black | 15 | Red |
| 1 | Blue | 20 | Magenta |
| 5 | Green | 25 | Dark Blue |
| 10 | Cyan | 30 | Dark Green |


- 1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
- 2 Fixture is mounted 1'-0" above the illuminated surface.

| | | |
|---|-----|--|
| SAN-SWH-FR-...-GE... | | |
| Delivered Lumens - General Illumination | | |
| | | Diameter [Wattage] |
| | | 16 [1 CC] |
| CCT | 30- | 85 |
| | 40- | 90 |
| | 50- | 103 |
| | | Polar Plot / Cone Of Light Multiplier |
| | | 16 [1 CC] |
| | | 1.00 |



Beam Angle (0-180) = 180.0
Beam Angle (90-270) = 180.0

ISOILLUMINANCE DIAGRAM - 1W 3000K
General Illumination¹
SAN-SWH-FR-16-1-CC-30-GE²

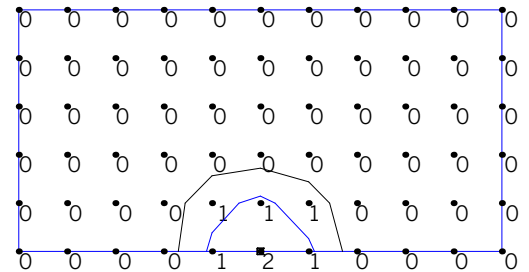

| Value [Fc] | Color | Value [Fc] | Color |
|------------|-------|------------|------------|
| 0.5 | Black | 15 | Red |
| 1 | Blue | 20 | Magenta |
| 5 | Green | 25 | Dark Blue |
| 10 | Cyan | 30 | Dark Green |

- 1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
- 2 Fixture is mounted 1'-0" above the illuminated surface.