



SLIM DELTA DIRECT


Housing: Aluminum profile with integrated opal diffuser downwards
Design: SATTLER

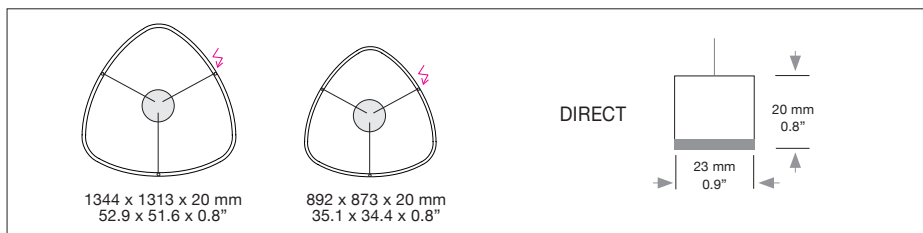


Mounting Version




3-point suspension (5m/197" max.) with drivers in offset surface mounted canopy, separate power cable. (Up to Ø 2600mm/102")




Drivers in center surface mounted canopy¹, current-carrying suspension cables. (Up to Ø 1800mm/71")^{4,5}




3-point straight suspension (197" max.) with remote mounted drivers, current-carrying suspension cables. (Up to Ø 1800mm/71")²




1-point suspension with drivers in pendant canopy PB 366, separate power cable from canopy down. (Up to Ø 1800mm/71")²
(a) Max. 5m/196" +
(b) Max. 3m/118"



1-point suspension with drivers in pendant canopy PB 366, current-carrying suspension cables from canopy down. (Up to Ø 1800mm/71")²
(a) Max. 5m/196" +
(b) Max. 3m/118"



Direct ceiling mounting 50mm/1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 3 cables and remote technical unit in suspended ceiling.

¹ Mounting versions E & F = Minimum suspension height half the size of the light fixture, maximum suspension height two times the diameter of the light fixture
² Only available with 1 row of LED.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Including steel cable suspension 3000mm/118" and/or power supply cable 5000mm/197". Version S,T 5000 + 3000mm / 197"+118"

Driver enclosure dimensions (1 row of LED)

Type	Size mm / inch L W H	Size of lamp mm / inch.	Included with Mounting Version
DE 1F	360 x 150 x 85 14.2 x 5.9 x 3.3"	up to Ø 1800 / 62.9"	G, K
DE 2F	360 x 300 x 85 14.2 x 11.8 x 3.3"	up to size Ø 3500 / 137.8"	A, G

Power cable cover plate
(included with mounting version A, C & G) Ceiling opening box for power supply cable (80mm/3.1" Ø round metal cover). White powder coated finish.

Canopy dimensions of (1 row of LED)

Typ	Size mm / inch Ø cover plate-body x height	Included with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1800 / 62.9"	B, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 3500 / 137.8"	B, H
DB 145	Ø 145-133 x 55 mm / 5.7-5.2 x 2.2"	K
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1320 / 51.9"	T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8" up to size Ø 1800 / 70.8"	T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all drivers is 120 / 277 VAC 50/60 Hz

Complete order number

--	--	--	--	--	--	--

Optional



CASAMBI wall-switch

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20 Canopy B, E, F, S, T
IP 52 A, R, G, K



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.