

suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

Materials












Aluminum body

AISI 316L stainless steel flange



suelo range



	2 W	4.2 W	7.2 W	13 W	30 W
Suelo_R ○	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RJ ○ 	-	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RX ○	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
Suelo_RXJ ○ 	-	-	Ø 4.7 in	Ø 6.7 in	-
SueloPRO_R ○	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
SueloPRO_RX ○	Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
Suelo_RX Double ○	-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
Suelo Telescopic ○	-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
Options	 PRO_R, PRO_RX	 _R, PRO_R  PRO_R	 _R, _RX, PRO_R, PRO_RX  PRO_R, PRO_RX	 _RX, PRO_R, PRO_RX  _RX, PRO_RX	 _RX  _RX
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
Standard	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
Optics					
Pro	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
Driver	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
Current	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

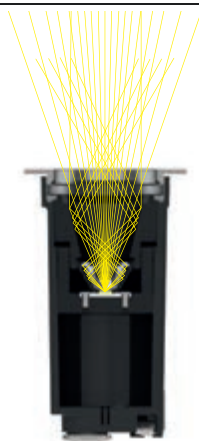

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

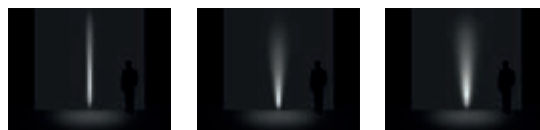

Flood

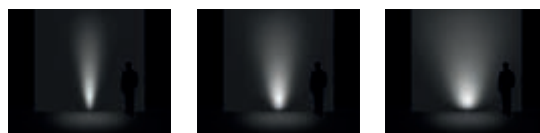


Diffused



Asymmetric



Suelo_RJ | Up-Light | powerLED | Wet location | Driver remote | Adjustable | Driver over | 4.2W



C.C. - 350mA

Steel/Alu	E80455	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. - 24V

Steel/Alu	E80456	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	60

Power supply options (remote only)


OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings

E84936
Outer casing for ground-mounting installation

technical information

Suelo_RJ | Up-Light | powerLED | Wet location | Driver remote | Adjustable | Driver over | 7.2W

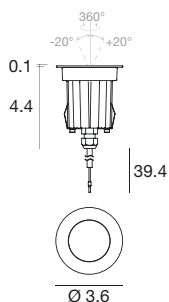

C.C. - 630mA

Steel/Alu	E80576	2700K	709 lm	M	Medium Flood	20
		3000K	760 lm	W	Medium Flood	30
		4000K	821 lm	N	Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures


C.V. - 24V

Steel/Alu	E80578	2700K	709 lm	M	Medium Flood	20
		3000K	760 lm	W	Medium Flood	30
		4000K	821 lm	N	Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings



E99680
Outer casing for ground-mounting installation