

suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

Materials

Aluminum body

AISI 316L stainless steel flange



suelo range



	2 W	4.2 W	7.2 W	13 W	30 W
Suelo_R ○	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RJ ○	-	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RX ○	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
Suelo_RXJ ○	-	-	Ø 4.7 in	Ø 6.7 in	-
SueloPRO_R ○	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
SueloPRO_RX ○	Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
Suelo_RX Double ○	-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
Suelo Telescopic ○	-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
Options	HC PRO_R, PRO_RX	HC DL _R, PRO_R	HC DL _R, _RX, PRO_R, PRO_RX	HC DL _RX, PRO_R, PRO_RX	HC DL _RX
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
Standard	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
Optics					
Pro	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
Driver	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
Current	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

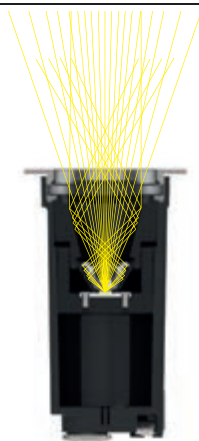

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

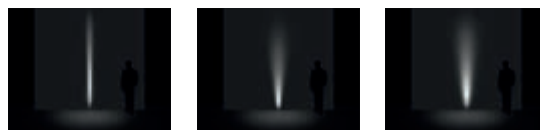

Flood

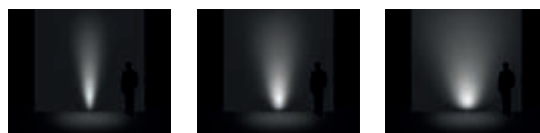


Diffused



Asymmetric




Suelo_RX | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W

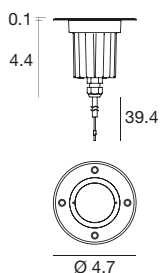

C.C. - 7.2W - 630mA

Steel/Alu	E80548	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60
					Elliptic	88
					Wide Flood	12
					General	00
					Asymmetric	07



Steel/Alu	E80549	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. - 7.2W - 24V

Steel/Alu	E80552	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60
					Elliptic	88
					Wide Flood	12
					General	00
					Asymmetric	07



Steel/Alu	E80553	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location



RGBW
Quad-chip LED


RGBW - 8W - 630mA

Steel/Alu	E81718	RGBW natural white	Q	Narrow Spot	06
		RGBW warm white	V	Medium Flood	15
				Flood	45


Power supply options (remote only)

PWR50W-630
DMX driver, EldoLED POWERdrive 50W Factory pre-programmed or RDM programmable, DMX control not included/Ordered separately 50W for 1-4 Fixtures



Recessed casings



E98121
Outer casing for
ground-mounting
installation



Suelo_RX | Screw-in | Up-Light | arrayLED | Wet location | Driver remote | Driver over | 13W 350mA



Steel/Alu	E80607	2700K	1724 lm	M	Spot	15	
		3000K	1724 lm	W	Medium Flood	35	
		4000K	1854 lm	N	Flood	60	
Steel/Alu	E81109	2700K	1683 lm	M	Asymmetric	07	
		3000K	1808 lm	W			
		4000K	1949 lm	N			
Steel/Alu	E80608	2700K	1470 lm	M	Narrow Spot	06	
		3000K	1470 lm	W			
		4000K	1587 lm	N			
HC	Steel/Alu	E81740	2700K	1724 lm	M	Spot	15
			3000K	1724 lm	W	Medium Flood	35
DL	Steel/Alu	E81741	3000K	1724 lm	W	Medium Flood	35
			4000K	1854 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

RGBW - 16W - 350mA



Steel/Alu	E81719	RGBW natural white	Q	Spot	15
		RGBW warm white	V	Medium Flood	30
				Flood	60

Power supply options (remote only)

PWR50W-350



DMX driver, EldoLED POWERdrive 50W Factory pre-programmed or RDM programmable, DMX control not included/Ordered separately for 1-2 Fixtures

Recessed casings



E84933
Outer casing for
ground-mounting
installation

Suelo_RX | Screw-in | Up-Light | 120-277V | arrayLED | Wet location | Integral Driver | Driver over | 840mA

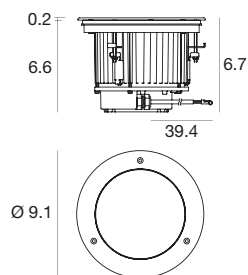

On/Off 33.6W

Steel/Alu	E80614	2700K	4088 lm	M	Spot	15
		3000K	4372 lm	W	Medium Flood	35
		4000K	4702 lm	N	Flood	60

Steel/Alu	E80615	2700K	3428 lm	M	Narrow Spot	06
		3000K	3428 lm	W		
		4000K	3700 lm	N		

Steel/Alu	E80616	2700K	3999 lm	M	Asymmetric	07
		3000K	4294 lm	W		
		4000K	4631 lm	N		

HC	Steel/Alu	E81746	2700K	4088 lm	M	Spot	15
			3000K	4372 lm	W	Medium Flood	35
DL	Steel/Alu	E81747	4000K	4702 lm	N	Flood	60



RGBW - 30W - 630mA

Steel/Alu	E81737	RGBW natural white	Q	Spot	15
		RGBW warm white	V	Medium Flood	30
				Flood	60

Power supply options (remote only)

PWR50W-630

DMX driver, EldoLED POWERdrive 50W
 Factory pre-programmed or RDM programmable, DMX
 control not included/Ordered separately
 50W for 1 Fixture

Recessed casings



E99794
 Outer casing for
 ground-mounting
 installation

technical
 information