

suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

Materials












Aluminum body

AISI 316L stainless steel flange



suelo range



	2 W	4.2 W	7.2 W	13 W	30 W
Suelo_R ○	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RJ ○ 	-	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RX ○	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
Suelo_RXJ ○ 	-	-	Ø 4.7 in	Ø 6.7 in	-
SueloPRO_R ○	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
SueloPRO_RX ○	Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
Suelo_RX Double ○	-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
Suelo Telescopic ○	-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
Options	 PRO_R, PRO_RX	 _R, PRO_R  PRO_R	 _R, _RX, PRO_R, PRO_RX  PRO_R, PRO_RX	 _RX, PRO_R, PRO_RX  _RX, PRO_RX	 _RX  _RX
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
Standard	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
Optics					
Pro	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
Driver	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
Current	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

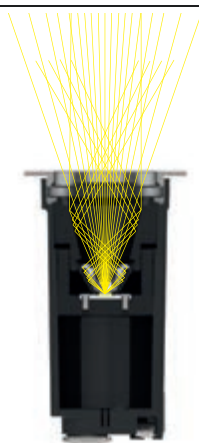

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

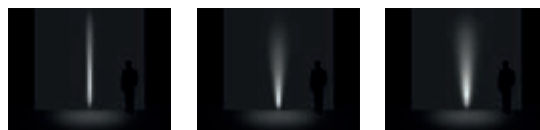

Flood

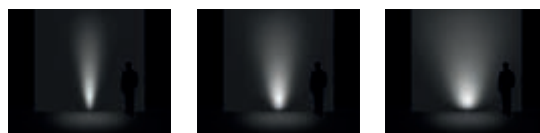


Diffused



Asymmetric



Suelo_RX Double | Screw-in | Up-Light | arrayLED | 120-277V | Wet location | Integral Driver | Adjustable | Driver over | 13.5W 350mA

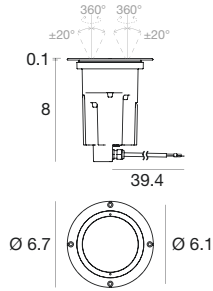

On/Off


Steel/Alu	E81619	2700K	1114 lm	M	Spot	15
		3000K	1176 lm	W	Medium Flood	30
		4000K	1300 lm	N	Flood	60

Recessed casings



E84932
Outer casing for ground-mounting installation

Suelo_RX Double | Screw-in | Up-Light | arrayLED | 120-277V | Wet location | Integral Driver | Adjustable | Driver over | 26W 700mA

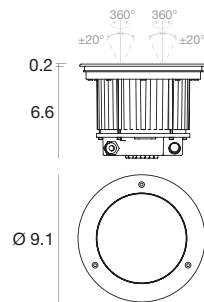

CRI 80


Steel/Alu	E81620	2700K	2207 lm	M	Spot	15
		3000K	2377 lm	W	Medium Flood	30
		4000K	2547 lm	N	Flood	60

Recessed casings



E99794
Outer casing for ground-mounting installation

- Receded optical compartment
- Independent tilting
- Optics customisable separately upon request

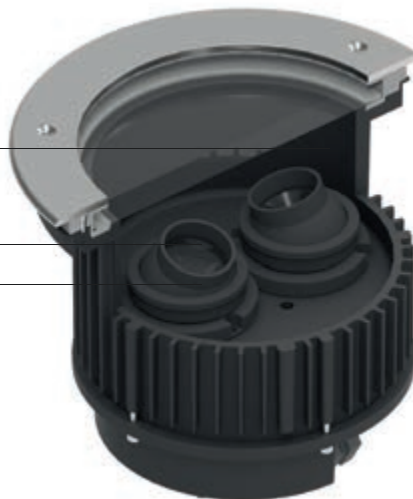

index technical information