

# suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

## **Materials**

Aluminum body

AISI 316L stainless steel flange



# suelo range



	2 W	4.2 W	7.2 W	13 W	30 W
<b>Suelo_R</b> ○	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
<b>Suelo_RJ</b> ○	-	Ø 2.5 in	Ø 3.6 in	-	-
<b>Suelo_RX</b> ○	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
<b>Suelo_RXJ</b> ○	-	-	Ø 4.7 in	Ø 6.7 in	-
<b>SueloPRO_R</b> ○	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
<b>SueloPRO_RX</b> ○	Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
<b>Suelo_RX Double</b> ○	-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
<b>Suelo Telescopic</b> ○	-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
<b>Options</b>	HC PRO_R, PRO_RX	HC DL _R, PRO_R	HC DL _R, _RX, PRO_R, _PRO_RX	HC DL _RX, PRO_R, _PRO_RX	HC DL _RX
<b>CRI 80</b>	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
<b>Standard</b>	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
<b>Optics</b>					
<b>Pro</b>	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
<b>Driver</b>	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
<b>Current</b>	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

## The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



## Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

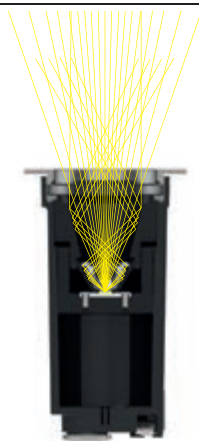

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

## Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

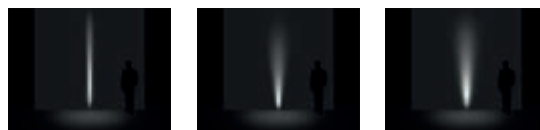


Flood

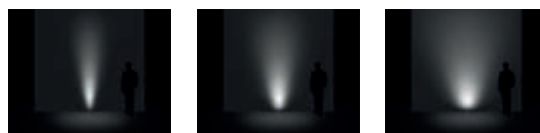


Diffused



Asymmetric

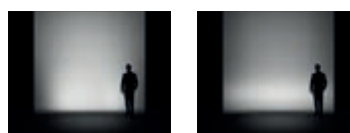

Suelo\_RXJ | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Adjustable | Driver over | 7.2W



C.C. - 630 mA

Steel/Alu	<b>E80577</b>	2700K	709 lm	<b>M</b>	Medium Flood	<b>20</b>
		3000K	760 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	821 lm	<b>N</b>	Flood	<b>60</b>

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED EC0drive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures


C.V. - 24V

Steel/Alu	<b>E80579</b>	2700K	709 lm	<b>M</b>	Medium Flood	<b>20</b>
		3000K	760 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	821 lm	<b>N</b>	Flood	<b>60</b>


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location


Recessed casings



**E98121**  
Outer casing for ground-mounting installation



Suelo\_RXJ | Screw-in | Up-Light | arrayLED | Wet location | Driver remote | Adjustable | Driver over | 13W



Steel/Alu	<b>E80613</b>	2700K	1724 lm	<b>M</b>	Spot	<b>15</b>
		3000K	1724 lm	<b>W</b>	Medium Flood	<b>35</b>
		4000K	1854 lm	<b>N</b>	Flood	<b>45</b>

**Power supply options (remote only)**

EC030W-350	SOL050W-350	SOL0100W-350
0-10V EldoLED EC0drive 30W for 1 fixture	0-10V EldoLED SOL0drive 50W for 1-2 fixtures	0-10V EldoLED SOL0drive 100W for 1-4 fixtures

**Recessed casings**



**E84933**  
Outer casing for ground-mounting installation

technical information