

# suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

## **Materials**

Aluminum body

AISI 316L stainless steel flange



# suelo range



	2 W	4.2 W	7.2 W	13 W	30 W
<b>Suelo_R</b> ○	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
<b>Suelo_RJ</b> ○	-	Ø 2.5 in	Ø 3.6 in	-	-
<b>Suelo_RX</b> ○	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
<b>Suelo_RXJ</b> ○	-	-	Ø 4.7 in	Ø 6.7 in	-
<b>SueloPRO_R</b> ○	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
<b>SueloPRO_RX</b> ○	Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
<b>Suelo_RX Double</b> ○	-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
<b>Suelo Telescopic</b> ○	-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
<b>Options</b>	HC PRO_R, PRO_RX	HC DL _R, PRO_R	HC DL _R, _RX, PRO_R, PRO_RX	HC DL _RX, PRO_R, PRO_RX	HC DL _RX
<b>CRI 80</b>	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
<b>Standard</b>	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
<b>Optics</b>					
<b>Pro</b>	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
<b>Driver</b>	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
<b>Current</b>	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

## The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



## Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

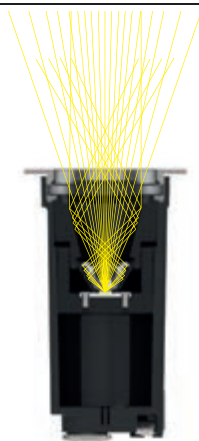

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

## Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

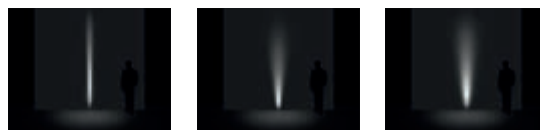

Flood

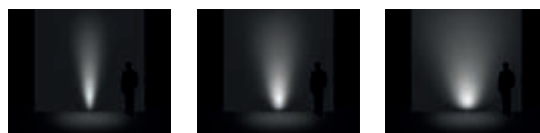



Diffused



Asymmetric



SueloPRO\_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 2W



C.C. - 630mA

Steel/Alu	<b>E80439</b>	2700K	205 lm	<b>M</b>	Spot	<b>15</b>
		3000K	233 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	249 lm	<b>N</b>	Flood	<b>60</b>
					Elliptic	<b>88</b>
					General	<b>00</b>



Steel/Alu	<b>E80440</b>	2700K	205 lm	<b>M</b>	Spot	<b>15</b>
		3000K	233 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	249 lm	<b>N</b>	Flood	<b>60</b>

Power supply options (remote only)

**ECO30W-630**

0-10V EldoLED ECOdrive  
30W for 1-10 fixtures

**SOLO50W-630**

0-10V EldoLED SOLOdrive  
50W for 1-16 fixtures

**SOLO100W-630**

0-10V EldoLED SOLOdrive  
100W for 1-32 fixtures

C.V. - 24V

Steel/Alu	<b>E80441</b>	2700K	205 lm	<b>M</b>	Spot	<b>15</b>
		3000K	233 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	249 lm	<b>N</b>	Flood	<b>60</b>
					Elliptic	<b>88</b>
					General	<b>00</b>



Steel/Alu	<b>E80442</b>	2700K	205 lm	<b>M</b>	Spot	<b>15</b>
		3000K	233 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	249 lm	<b>N</b>	Flood	<b>60</b>

Power supply options (remote only)

**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24V  
DC, 120-277VAC, supplied in a Dry  
location


**OT96-JBX**

Osram, Non-dim 24V DC, 120-  
277VAC, Wet location



Recessed casings



**E99684**  
Outer casing for  
ground-mounting  
installation  
IP67/68



SueloPRO\_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 4.2W



C.C. - 350mA

Steel/Alu	<b>E80449</b>	2700K	490 lm	<b>M</b>	Medium Flood	<b>20</b>
		3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	529 lm	<b>N</b>	Flood	<b>50</b>



Steel/Alu **E80450**



Steel/Alu **E80451**

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. - 24V

Steel/Alu	<b>E80452</b>	2700K	490 lm	<b>M</b>	Medium Flood	<b>20</b>
		3000K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
		4000K	529 lm	<b>N</b>	Flood	<b>50</b>



Steel/Alu **E80453**



Steel/Alu **E80454**

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location


Recessed casings



**E84935**  
Outer casing for  
ground-mounting  
installation



SueloPRO\_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W

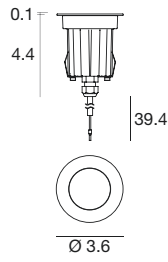

C.C. - 630mA

Steel/Alu	<b>E80558</b>	2700K	877 lm	<b>M</b>	Narrow Spot	<b>06</b>
Steel/Alu	<b>E80559</b>	3000K	945 lm	<b>W</b>	Spot	<b>15</b>
Steel/Alu	<b>E80560</b>	4000K	1013 lm	<b>N</b>	Medium Flood	<b>30</b>
					Flood	<b>60</b>

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures


C.V. - 24V




Steel/Alu	<b>E80564</b>	2700K	877 lm	<b>M</b>	Narrow Spot	<b>06</b>
Steel/Alu	<b>E80565</b>	3000K	945 lm	<b>W</b>	Spot	<b>15</b>
Steel/Alu	<b>E80566</b>	4000K	1013 lm	<b>N</b>	Medium Flood	<b>30</b>
					Flood	<b>60</b>

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location



Recessed casings



**E99680**  
Outer casing for ground-mounting installation

