

suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

Materials

Aluminum body

AISI 316L stainless steel flange



suelo range



	2 W	4.2 W	7.2 W	13 W	30 W
Suelo_R ○	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RJ ○	-	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RX ○	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
Suelo_RXJ ○	-	-	Ø 4.7 in	Ø 6.7 in	-
SueloPRO_R ○	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
SueloPRO_RX ○	Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
Suelo_RX Double ○	-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
Suelo Telescopic ○	-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
Options	HC PRO_R, PRO_RX	HC DL _R, PRO_R	HC DL _R, _RX, PRO_R, PRO_RX	HC DL _RX, PRO_R, PRO_RX	HC DL _RX
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
Standard	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
Optics					
Pro	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
Driver	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
Current	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

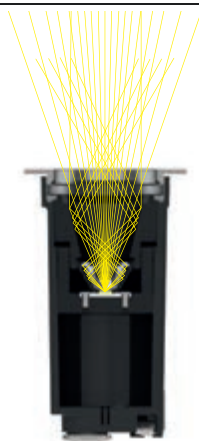

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

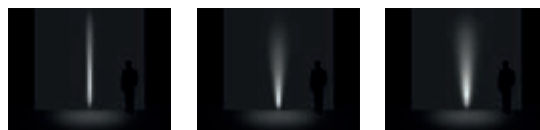


Flood

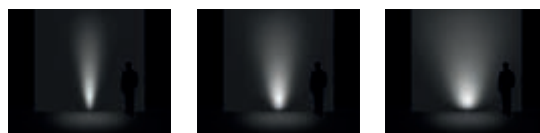


Diffused

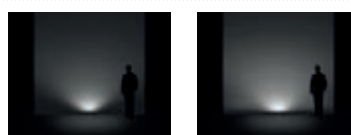

Asymmetric




SueloPRO_RX | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Driver over | 2W



C.C. - 600mA

Steel/Alu	E80435	2700K	205 lm	M	Spot	15
		3000K	233 lm	W	Medium Flood	30
		4000K	249 lm	N	Flood	60
					General	00

Steel/Alu	E80436	2700K	205 lm	M	Spot	15
		3000K	233 lm	W	Medium Flood	30
		4000K	249 lm	N	Flood	60



Power supply options (remote only)

ECO30W-600	SOLO50W-600	SOLO100W-600
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

C.V. - 24V

Steel/Alu	E80437	2700K	205 lm	M	Spot	15
		3000K	233 lm	W	Medium Flood	30
		4000K	249 lm	N	Flood	60
					General	00



Steel/Alu	E80438	2700K	205 lm	M	Spot	15
		3000K	233 lm	W	Medium Flood	30
		4000K	249 lm	N	Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location



technical
information

Recessed casings



E99685
Outer casing for
ground-mounting
installation
IP67/68

SueloPRO_RX | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W



C.C. - 630 mA

Steel/Alu	E80561	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
Steel/Alu	E80562	4000K	1013 lm	N	Medium Flood	30
					Flood	60

HC

DL

Steel/Alu **E80563**

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. - 24V

Steel/Alu	E80567	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
Steel/Alu	E80568	4000K	1013 lm	N	Medium Flood	30
					Flood	60

HC


DL

Steel/Alu **E80569**

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location




Recessed casings



E98121
Outer casing for ground-mounting installation

technical information

SueloPRO_RX | Screw-in | Up-Light | arrayLED | 120-277V | Wet location | Integral Driver | Driver over | 15W 350mA



On/Off

Steel/Alu	E80611	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	35
		4000K	1854 lm	N	Flood	60

Steel/Alu	E80612	2700K	1743 lm	M	Asymmetric	07
		3000K	1863 lm	W		
		4000K	1863 lm	N		

HC	Steel/Alu	E81744	2700K	1470 lm	M	Spot	15
			3000K	1470 lm	W	Medium Flood	35
DL	Steel/Alu	E81745	4000K	1587 lm	N	Flood	60

Recessed casings



E84932
Outer casing for ground-mounting installation