



## 2.4" General Downlight Round Wall Wash



- Part of a complete family of 2.4" aperture matching downlights.
- Low brightness downlight for general illumination.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.
- Made in the USA
- 5-year Warranty

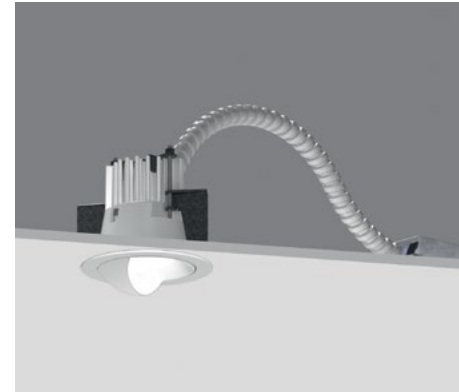

<b>Housing</b>	Die-caste aluminum for precision fit and heat dissipation 3/8" bezel trim compatible with installation from below into ACT, drywall and hard ceilings Quick-screw mounting mechanism EZ-Click Cover installation
<b>Covers</b>	Asymmetric reflector with room side cut-off
<b>LED</b>	92CRI, 60+ lumens per watt delivered Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
<b>Optics</b>	High angle symmetrical distribution
<b>Driver</b>	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing
<b>Installation</b>	Not required when using the Driver Enclosure
<b>Housing</b>	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location, CE, Wet Location rated

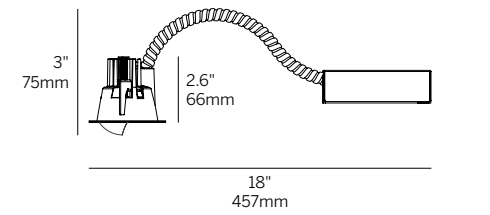

Standard housing

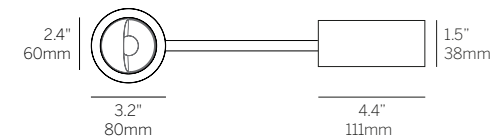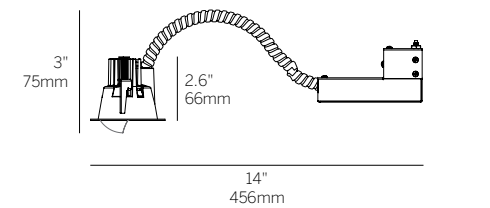

Shallow housing (SH)

technical  
information

## 2.4" General Downlight Round Wall Wash

Model	Fixation	Power <sup>1</sup>	CRI/CCT <sup>2,3</sup>	Driver <sup>5</sup>	Lens	Trim Finish	Cone Finish	Options
WG-60RGDL	RBT	L M H	927 930 935 940	X S S010 SPH D010 PEQ1 PEQ0	RWW	W (std) S F	W (std) S <sup>5</sup> F	CP IC NC LP SH WL

### Model

- WG-60RGDL = 2.4" General Downlight Round Wall Wash

### Fixation

- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

### CRI/CCT<sup>2,3</sup>

- 90+ CRI (Low/Mid/High Power)
- 927 = 2700K, (364/495/654 lm)
- 930 = 3000K, (392/533/704 lm)
- 935 = 3500K, (392/533/704 lm)
- 940 = 4000K, (419/571/753 lm)

### Driver<sup>4</sup>

- X = Driver ordered separately

### Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

### Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

### Lens

- RWW = Round wall wash

### Trim Finish

- W = White (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500<sup>5</sup>
- F = Custom finish (provide RAL code)

### Cone Finish

- W = White, RAL 9010 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500<sup>5</sup>
- F = Custom finish (provide RAL code)

### Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location

### Emergency Remote Only

- Emergency LED battery backup available, order separately

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Delivered lumens shown. See photometry for additional details.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)