
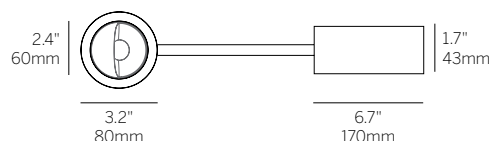
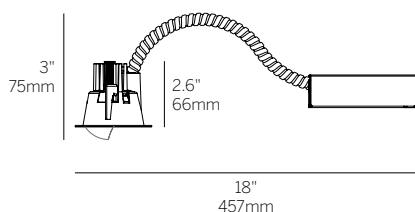




## 2.4" General Downlight

### Round Wall Wash

inter•lux

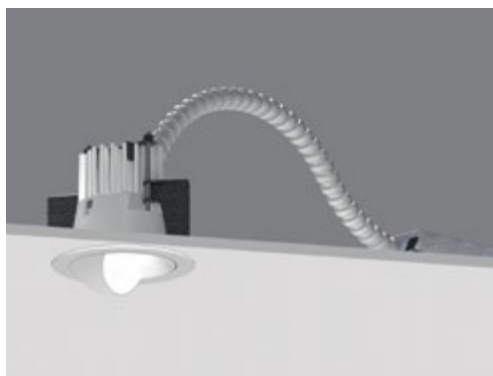

Standard housing

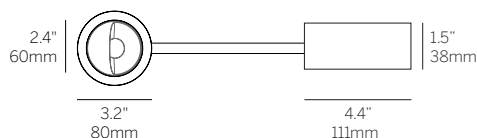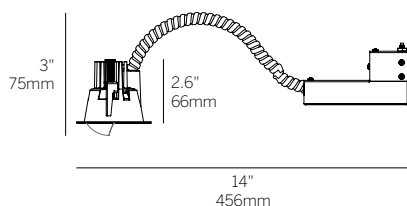

Shallow housing (SH)

#### Ordering Information

WG-60RGDL	RBT					RSRWW	RSC	RWW				
Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing <sup>4</sup>	Options
WG-60RGDL	RBT	L M H	80 92	27 30 35 40	S010 SPH PEQ0 RS010 RD010 X	RSRWW	RSC	RWW	W S F	W S F	LP NC IC CP X	WL SH EM AWNRF

#### Luminaire

- 2.4" (60mm) round aperture wall wash with semi-recessed kick reflector for wall wash applications.
- Efficacy up to 57 lumens per watt (delivered).
- CREE 2-step MacAdam LEDs.
- CRI > 80 standard, 92+ optional.
- L70 (TM21 Projected 85° C) 55,400 hrs.
- ETL and ETL-C for dry and damp location standard. Wet Location optional.
- Luminaire and driver installed and maintained from below the ceiling. Maximum ceiling thickness 1" (25.4mm).
- Integral driver requires 4.5" (114mm) minimum ceiling clearance (void). Remote driver optional.
- Housings available (see housings page).
- 5-year warranty.

#### Fixation

- RBT = Recessed bezel trim

#### Power<sup>1</sup>

- L = Low power, 5.7W @ 350mA
- M = Mid power, 8.4W @ 500mA
- H = High power, 12W @ 700mA

#### CRI

- 80 = 80 CRI (standard)
- 92 = 92 CRI

#### CCT<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

#### Driver (Integral)<sup>3</sup>

- S010 = 0-10V 10% dimming, 120-277V (15W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)

#### Driver (Remote)<sup>3</sup>

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W, or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

#### Cover

- RSRWW = Round Semi-Recessed Wall Wash

#### Lens

- RSC = Recessed Satin Clear

#### Beam

- WW = Wall Wash

#### Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL

#### Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL

#### Housing (Optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

#### Options

- WL = Wet Location
- SH = Reduces required plenum space to 3.5" (89mm)
- EM = Emergency (remote)
- AWNRf = Lutron Athena Wireless Node RF (RS010, RD010 drivers only)

<sup>1</sup> Wattage shown does not include power supplies/drivers.

<sup>2</sup> See photometric data sheet for delivered lumens.


<sup>3</sup> See driver information for details.

<sup>4</sup> See housings page for details.


## 2.4" General Downlight

### Round Wall Wash - Dimensions


inter•lux

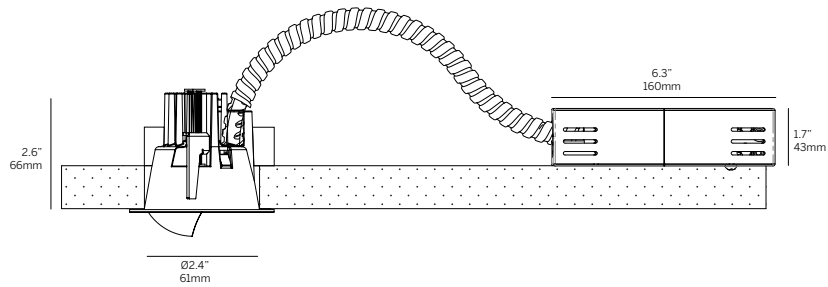

Integral Driver (standard)<sup>1,3</sup>

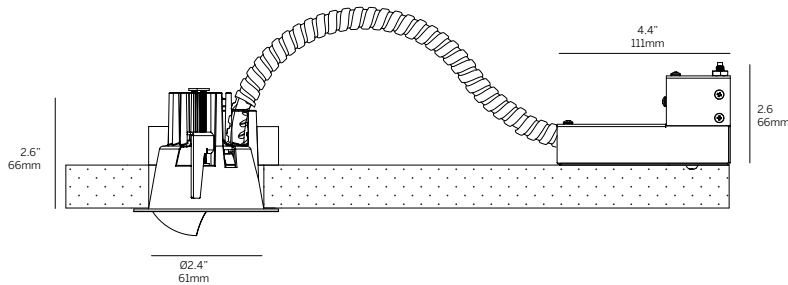

Integral Driver (shallow - SH)<sup>2,3</sup>

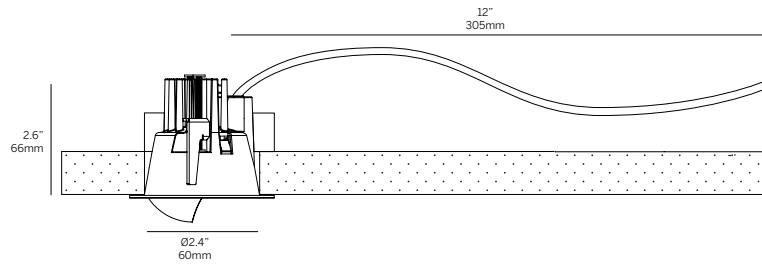

Remote Driver<sup>2,3</sup>

- <sup>1</sup> Requires 4.5" minimum ceiling clearance (void)
- <sup>2</sup> Requires 3.5" minimum ceiling clearance (void)
- <sup>3</sup> 1" max ceiling thickness, 1/16" min ceiling thickness, Does not allow through-wiring

## Drivers


SPH (Standard Phase Dimming wired for forward phase)



S010 (Standard 0-10V)  
D010 (EldoLED 0-10V)



SPH (Standard Phase Dimming wired for reverse phase)

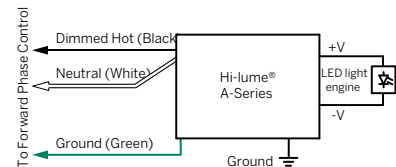


Note: Colors shown correspond to terminal blocks on driver.


# 2.4" General Downlight Round Wall Wash - Housings



Chicago Plenum Housing (CP) / Insulated Ceiling Housing(IC) (requires accessible ceiling)

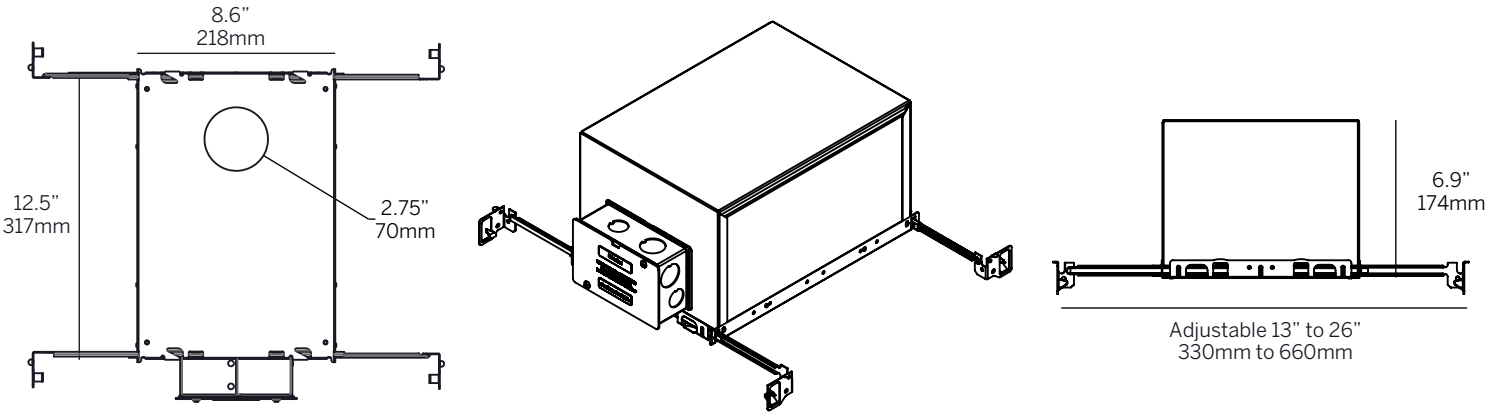

New Construction Housing (NC) (requires accessible ceiling)

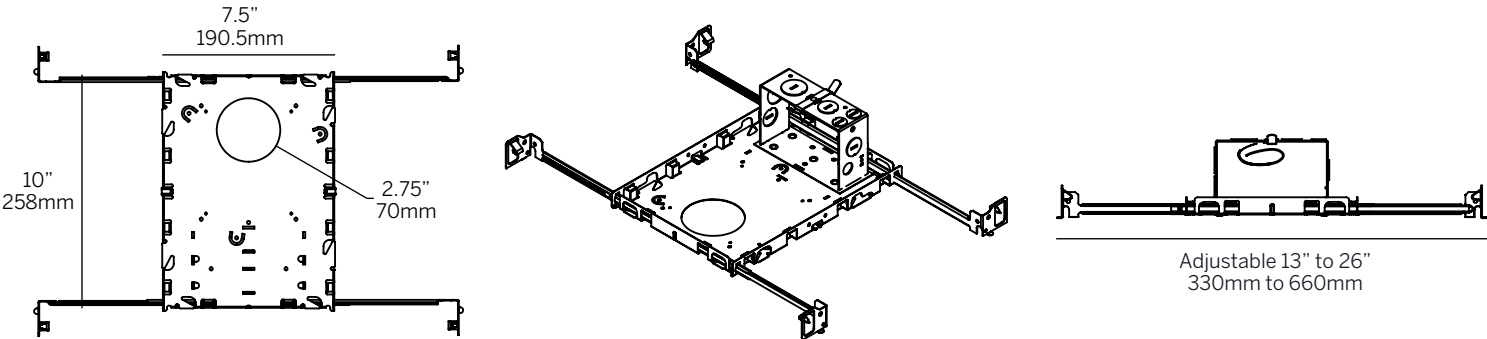

Landing Pan (LP)

