

# 4" ProTools DL Wall Wash Round Wall Wash

Dedicated Wall Wash Luminaire for Even Illumination of Vertical Surfaces

- 4" round downlight with 2" light aperture.
- 0.7" regressed aperture / lens providing asymmetric beam distribution optimized for even illumination of vertical surfaces.
- High-angle illumination.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).


- Housing** Die-cast aluminum for precision fit and heat dissipation  
Mounting hardware for all ceiling types; trim and trimless  
EZ clip mounting for secure installation  
Snap-in cover  
Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
- Covers** Flush aperture with room-side cutoff and wall wash distribution
- LED** 90+ CRI  
Low/Mid/High/Extra High output choices  
2700K, 3000K, 3500K, 4000K  
Tunable White from 1800K - 4000K  
Warm Dim from 1800 - 3000K
- Beam** Satin spread lens (TIR Optic)
- Driver** Integral and remote drivers for all dimming and non-dimming applications  
Through-wire integral driver enclosure installed from below without the need for bulky housing  
POE driver compatibility
- Installation** Not required when using the Driver Enclosure
- Housing** Optional: IC and Chicago plenum  
Optional: new construction (with j-box and driver attached)  
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
- Warranty** 5-year Limited (see complete company warranty information)
- Certifications** ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

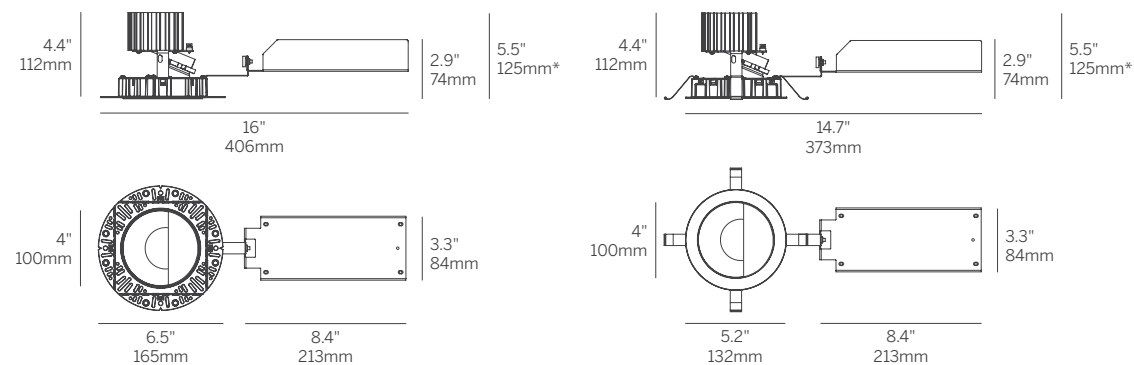

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

technical information

# 4" ProTools DL Wall Wash Round Wall Wash

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>4</sup>	Driver <sup>5</sup>	Cover	Lens	Finish <sup>6</sup>	Options
WG-100RPTDLWW	RPT RBT	L M H XH TW WD <sup>3</sup>	927 930 935 940 TW WD <sup>3</sup>	X S D010 PEQO TW	RWW	WWL	W S <sup>7</sup>	LP CP IC WL

- Model**
- WG-100RPTDLWW = 4" ProTools DL Wall Wash
- Fixation**
- RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**
- L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA<sup>3</sup>
- CRI/CCT<sup>4</sup>**  
90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (267/371/499/699 lm)
  - 930 = 3000K, (288/399/537/752 lm)
  - 935 = 3500K, (288/399/537/752 lm)
  - 940 = 4000K, (308/427/575/806 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)<sup>3</sup>
- Driver<sup>5</sup>**
- X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQO = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

- Cover**
- RWW = Round Wall Wash
- Lens**
- WWL = Wall Wash Spread Lens
- Finish<sup>6</sup>**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
  - S = Silver, 15% gloss, Tiger Drylac49/90500<sup>7</sup>
- Options**  
ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLWW...-RWW-WWL-W. See Page 2 for specsheet for additional details.
  - 4 See power supply page for details.
  - 5 See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)
  - 6 Plaster trim version includes white frame and silver cover.

