


4" ProTools Wall Wash

Round Recessed




WG-100RPTDLWW-...-RWW-WWL-WW-W-W							
Delivered Lumens							
	Power						
	L [5.7W]	M [8.4W]	H [12.0W]	XH [17.8W]	TW [9.1W]	WD [11.8W]	
CRI-CCT¹	92-27	275	380	504	707	-	-
	92-30	289	399	529	761	-	-
	92-35	289	399	529	761	-	-
	92-40	317	438	581	815	-	-
	92-TW	-	-	-	354	-	-
	95-WD	-	-	-	-	446	-
UGR²		32.0	33.1	34.1	35.4	-	-



BEAM ANGLE (0-180) = 48.8°
 BEAM ANGLE (90-270) = 43.9°

ISOILLUMINANCE - HIGH POWER 3500K RWW WWL WW
 WG-100RPTDLWW-...-XH-92-35-...-RWW-WWL-WW-W-W³

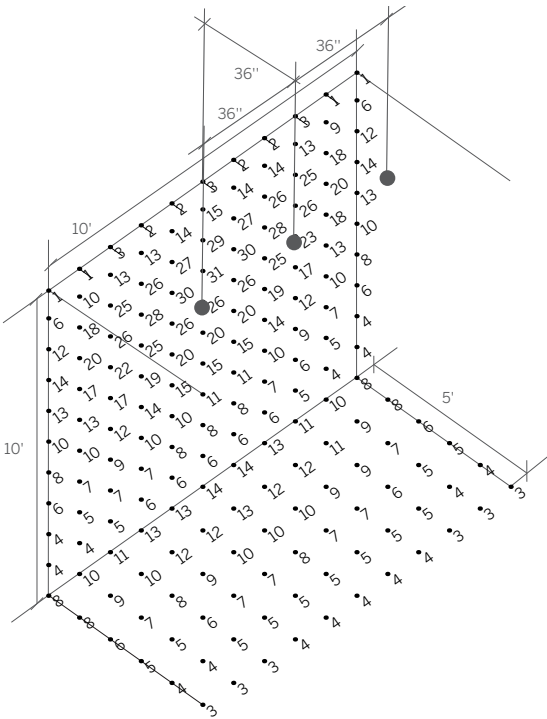

CRI-CCT MULTIPLIER					
92-27	92-30	92-35	92-40	92-TW⁴	95-WD⁴
0.93	1.00	1.00	1.07	0.47	0.55

POWER MULTIPLIER			
L [5.7W]	M [8.4W]	H [12.0W]	XH [17.8W]
0.39	0.54	0.71	1.00

- 1 98CRI LEDs provide approximately 20% less lumens than 92CRI LED values noted in Delivered Lumens chart.
- 2 UGR value noted is the maximum UGR (crosswise) with 92-35 LEDs at noted Power level.
- 3 Polar Plot and Cone of Light are applicable to part number noted; use Multiplier table(s) to approximate other CRI-CCT and Power options.
- 4 TW and WD lumen output multipliers are based on 4000K (TW) and 3000K (WD) at full output.

