


4" ProTools Wall Wash

Square Recessed




WG-100SPTDLWW-...-SWW-WWL-WW-W-W							
Delivered Lumens							
	Power						
	L [5.7W]	M [8.4W]	H [12.0W]	XH [17.8W]	TW [9.1W]	WD [11.8W]	
CRI-CCT¹	92-27	331	458	607	852	-	-
	92-30	348	480	638	917	-	-
	92-35	348	480	638	917	-	-
	92-40	382	527	700	982	-	-
	92-TW	-	-	-	427	-	-
	95-WD	-	-	-	-	537	-
UGR²		37.4	38.5	39.5	40.8	-	-



BEAM ANGLE (0-180) = 50.2°
 BEAM ANGLE (90-270) = 41.2°

ISOILLUMINANCE - HIGH POWER 3500K SWW WWL WW
 WG-100SPTDLWW-...-XH-92-35-...-SWW-WWL-WW-W-W³

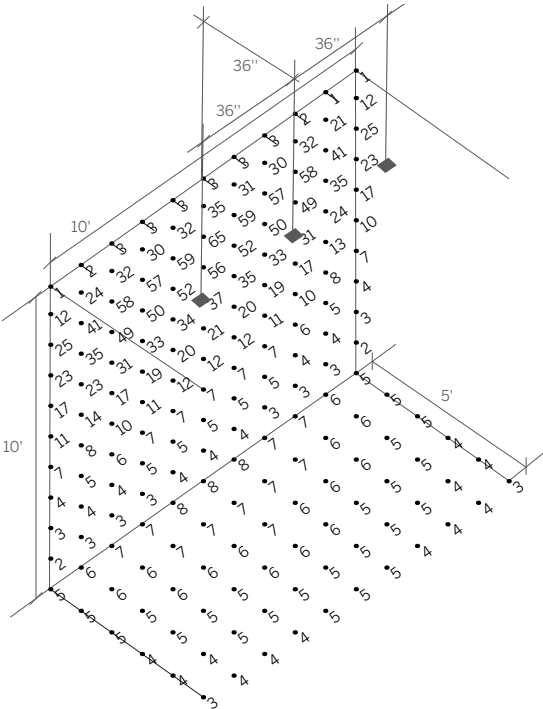

CRI-CCT MULTIPLIER					
92-27	92-30	92-35	92-40	92-TW⁴	95-WD⁴
0.93	1.00	1.00	1.07	0.47	0.55

POWER MULTIPLIER			
L [5.7W]	M [8.4W]	H [12.0W]	XH [17.8W]
0.39	0.54	0.71	1.00

- 1 98CRI LEDs provide approximately 20% less lumens than 92CRI LED values noted in Delivered Lumens chart.
- 2 UGR value noted is the maximum UGR (crosswise) with 92-35 LEDs at noted Power level.
- 3 Polar Plot and Cone of Light are applicable to part number noted; use Multiplier table(s) to approximate other CRI-CCT and Power options.
- 4 TW and WD lumen output multipliers are based on 4000K (TW) and 3000K (WD) at full output.

