



60 Linear Wall Direct / Indirect
Flush Lens

- 2.4" aperture, surface mounted fixture
- Standard and tailored run lengths, including corners, wall-to-wall configurations
- Flush lens for wide angle, even illumination
- Multiple control and connectivity options
- Consistent LED technology used throughout the Whitegoods product range
- Flexible design allows for installation from below with separate housing and gear tray for ease of installation and maintenance
- Flicker-free full range dimming with standard driver (Eldoled)
- Manufactured in the USA

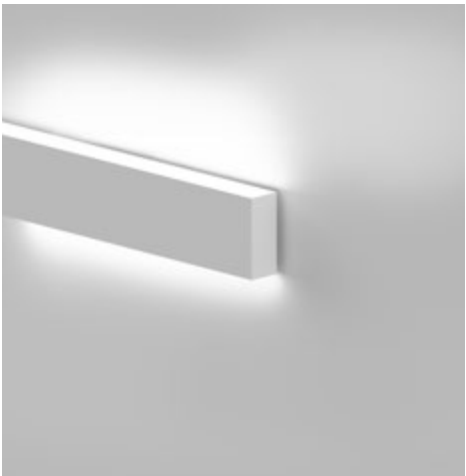

Housing	Precision extruded aluminum for true dimensions and tolerances Snap-in flush lens for seamless integrated appearance Standard and tailored lengths including corners, wall-to-wall configurations Finishes: white, black, silver and custom
Integration	Surface mounting bracket mounts to any wall or mullion
Distribution	High angle illumination linear downlight
LED	>90 CRI, 3-Step MacAdam, 2700-4000K static white 3W - 15W per foot, 180 nominal lumens per watt average, constant current Tuneable white 2200-4000K, 80 nominal lumens per watt average RGBW, 50 nominal lumens per watt L70 (TM21 Projected 85C) Static White / Tunable White = 72,000 hours, RGBW = 50,000 hours
Optic	OD - Snap-in flush satin opal acrylic for even illumination SD - Satin Clear Diffuser provides high efficiency soft edge beam, recommended for uplight MPL - Snap-in flush micro-prismatic for high efficiency, low brightness
Driver	Compatible with quality constant current drivers
Connectivity	POE Wireless
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Chicago plenum
Voltages	120-277VAC

Lenses/Accessories



60 Linear Wall Direct / Indirect
Flush Lens

Model ¹	Fixation	Pattern	Length	Direct				Indirect				Finish ⁸	Options
				Power ³	CRI ⁴	Driver ⁶	Lens	Power ³	CRI ⁴	Driver ⁶	Lens		
WG-60LDI	SW SWM	S PI ² PO ²	A A x B A x B x C A x B x A x B	P1 P2 P3 P4 M	927 930 935 940 TW ⁵ RGBW	E1 L1 POE BT DALI TQ DMX	OD (std) MPL ⁷	P1 P2 P3 P4 M	927 930 935 940 TW ⁵ RGBW	E1 L1 POE BT DALI TQ DMX	OD (std) SD	W (std) B S F	DC EM

- Model¹**
- WG-60LDI = 60 Linear Surface Wall Direct/Indirect
- Fixation**
- SW = Surface Wall Mount
 - SWM = Surface Wall Mullion Mount

- Pattern**
- S = Straight run
 - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane²
 - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane²

- Length**
- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25"). For pattens specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B).

- Power³**
- P1 = 3W/ft
 - P2 = 6W/ft
 - P3 = 10W/ft
 - P4 = 15W/ft
 - M = 7.6W/ft (RGBW Only)

- CRI/CCT (90+ CRI)⁴**
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
 - TW = Tuneable white 2200-4000K⁵
 - RGBW = 3000K White

- Driver (Integral)⁶**
- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, Ecosystem (120-277V)
 - PoE = Power over Ethernet
 - BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
 - DALI = EldoLED Dali DT8 0.1% (120-277V)
 - TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)
 - DMX = Osram+EldoLED, 24V, DMX Dimming (RGBW ONLY)

- Lens**
- OD = Satin opal diffuser (standard diffuse)
 - SD = Satin clear diffuser (high efficiency diffuse) (recommended for uplight)
 - MPL = Micro-prismatic lens (high efficiency diffuse)⁷

- Finish⁸**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - B = Black, 15% gloss, Tiger Drylac 44/90053
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finished trim, specify RAL

- Options**
- DC = Dual circuit
 - EM = Emergency LED driver (remote only)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 To specify Direct or Indirect only, leave Power, CRI, Driver and Lens blank for direction without light.
 - 2 See pattern spec sheet.
 - 3 Wattage shown does not include power supplies/drivers. Wattage shown does not include power supplies/drivers. Maximum combined wattage if specifying Direct Power + Indirect Power is 21 W/ft (i.e. P4 Direct [1 W/ft] + P2 Indirect [6 W/ft]).
 - 4 See spec page for delivered lumens.
 - 5 TW only available with P2 and P3.
 - 6 See power supply page for details.
 - 7 MPL available Summer 2022.
 - 8 See Tiger Drylac color chart: inter-lux.com/tiger