


60 Linear Wall Direct or Indirect Flush Lens

DIRECT ONLY

WG-60LDI-...-OD-XX-XX-...-W Delivered Lumens Per Foot						
		Power				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
CCT	927	361	678	1042	1534	-
	930	376	705	1085	1598	-
	935	389	731	1124	1673	-
	940	399	750	1154	1718	-
	TW ¹	-	337	518	-	-
	RGBW ¹	-	-	-	-	284
		Power Multiplier				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
		0.23	0.44	0.67	1.00	0.17
		CCT Multiplier				
		927	930	935	940	TW ¹
		0.96	1.00	1.05	1.08	0.46




BEAM ANGLE (0-180) = 104.4
BEAM ANGLE (90-270) = 103.2

ILLUMINANCE - 48" OD P4 3500K WG-60LDI-...-S-48-935-P4-OD-XX-XX-...-W ²		
Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
2	651	5.2
4	163	10.3
6	72	15.5
8	41	20.6
10	26	25.8
12	18	30.9
14	13	36.1
16	10	41.2
18	8	46.4
20	7	51.6

INDIRECT ONLY


WG-60LDI-...-XX-XX-...-OD-...-W Delivered Lumens Per Foot						
		Power				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
CCT	927	361	678	1042	1534	-
	930	376	705	1085	1598	-
	935	389	731	1124	1673	-
	940	399	750	1154	1718	-
	TW ¹	-	337	518	-	-
	RGBW ¹	-	-	-	-	284
		Power Multiplier				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
		0.23	0.44	0.67	1.00	0.17
		CCT Multiplier				
		927	930	935	940	TW ¹
		0.96	1.00	1.05	1.08	0.46

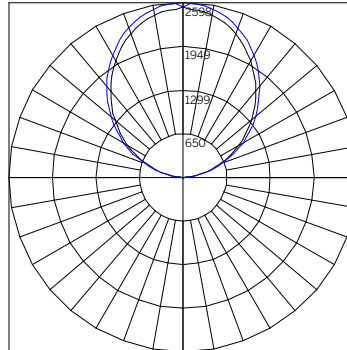

BEAM ANGLE (0-180) = 104.4
BEAM ANGLE (90-270) = 103.2

ILLUMINANCE - 48" OD P4 3500K WG-60LDI-...-S-48-XX-XXX-XX-P4-935-...-OD-W ²		
Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
20	7	51.6
18	8	46.4
16	10	41.2
14	13	36.1
12	18	30.9
10	26	25.8
8	41	20.6
6	72	15.5
4	163	10.3
2	651	5.2

WG-60LDI-...-XX-XX-...-SD-...-W Delivered Lumens Per Foot						
		Power				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
CCT	927	387	728	1119	1648	-
	930	403	757	1165	1716	-
	935	418	785	1207	1797	-
	940	429	806	1239	1845	-
	TW ¹	-	362	556	-	-
	RGBW ¹	-	-	-	-	305
		Power Multiplier				
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] ¹
		0.23	0.44	0.67	1.00	0.17
		CCT Multiplier				
		927	930	935	940	TW ¹
		0.96	1.00	1.05	1.08	0.46

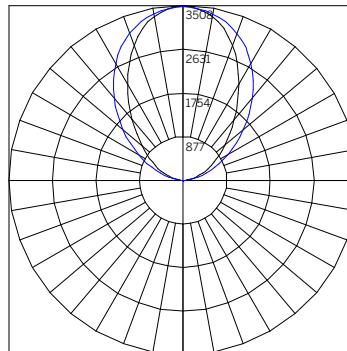

BEAM ANGLE (0-180) = 94.4
BEAM ANGLE (90-270) = 115.0

ILLUMINANCE - 48" SD P4 3500K WG-60LDI-...-S-48-XX-XXX-XX-P4-935-...-SD-W ²		
Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
20	9	43.2
18	11	38.9
16	14	34.5
14	18	30.2
12	24	25.9
10	35	21.6
8	55	17.3
6	97	13.0
4	219	8.6
2	877	4.3

1 TW Tuneable White lumen data at maximum output / 4000K CCT. RGBW lumen data at maximum output for all colors + white.

2 Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.