
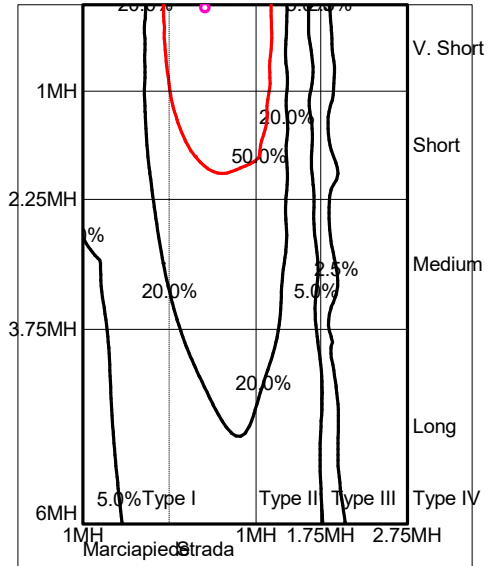


Luminaire		Measur.		Source			
Code	64594W00	Code	RF_181105_04_5+	Code	LED-STP047-BC		
Name	Dirigo_FL2 Aluminium / Linear profiles / Corten	Name	Dirigo_FL2 Aluminium / Linear profiles / Corten	Number	1		
Line	Eulumdat	Date	05-11-2018	Position			
Luminaire Flux	377 lm	Luminaire Power	18.0 W	Efficacy	20.943 lm/W	Efficiency	100.00%
Source Flux	377 lm	Maximum value	616.51 cd/klm	Position	C=85.00 G=22.50	CG	Sym. on planes 270-90

US ROAD STANDARDS

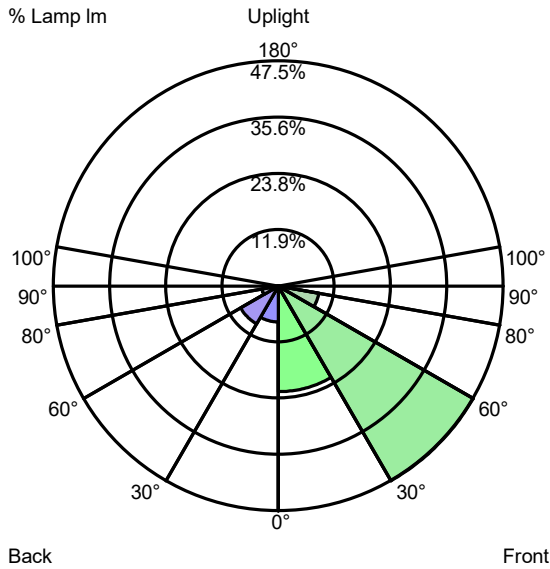

Luminaire Classification System (LCS)			
LCS Zone		Lumens	%Lamp %Lum
FL	0° -- 30°	84.2 lm	22.3 % 22.3 %
FM	30° -- 60°	179.2 lm	47.5 % 47.5 %
FH	60° -- 80°	32.7 lm	8.7 % 8.7 %
FVH	80° -- 90°	1.5 lm	0.4 % 0.4 %
BL	0° -- 30°	28.7 lm	7.6 % 7.6 %
BM	30° -- 60°	34.8 lm	9.2 % 9.2 %
BH	60° -- 80°	13.3 lm	3.5 % 3.5 %
BVH	80° -- 90°	2.6 lm	0.7 % 0.7 %
UL	90° -- 100°	0.0 lm	0.0 % 0.0 %
UH	100° -- 180°	0.0 lm	0.0 % 0.0 %
TOTALS		377.0 lm	100.0 % 100.0 %
BUG B0 U0 G0 Type II Very Short Asymmetrical			