


EN20-SWH-DE-....-RA...


Delivered Lumens - Radial

		Diameter [Wattage]
		16 [1 CC]
CCT	27-	n/a
	30-	113
	35-	113
	40-	120
		Polar Plot / Cone Of Light Multiplier
		16 [1 CC]
		1.00



Beam Angle (0-180) = 0.0
Beam Angle (90-270) = 151.4

ISOILLUMINANCE DIAGRAM - 1W 3000K Radial¹ EN20-SWH-DE-16-1-CC-30-RA²

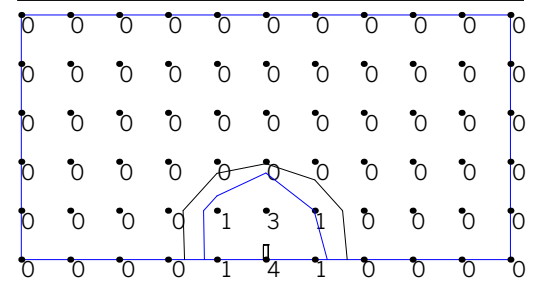


Value [Fc]	Color	Value [Fc]	Color
0.5	Black	15	Red
1	Blue	20	Magenta
5	Green	25	Dark Blue
10	Cyan	30	Dark Green

- 1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
- 2 Fixture is mounted 1'-0" above the illuminated surface.

EN20-SWH-QE-....-RA...


Delivered Lumens - Radial

		Diameter [Wattage]
		16 [1 CC]
CCT	27-	n/a
	30-	115
	35-	115
	40-	123
		Polar Plot / Cone Of Light Multiplier
		16 [1 CC]
		1.00



Beam Angle (0-180) = 179
Beam Angle (90-270) = 180.0

ISOILLUMINANCE DIAGRAM - 1W 3000K Radial¹ EN20-SWH-QE-16-1-CC-30-RA²

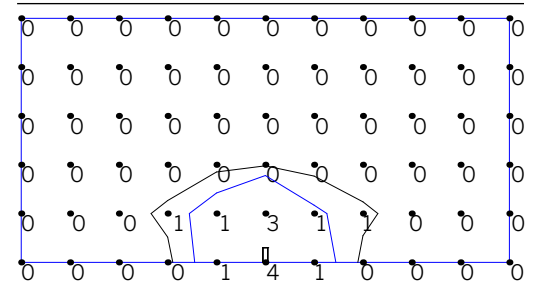

Value [Fc]	Color	Value [Fc]	Color
0.5	Black	15	Red
1	Blue	20	Magenta
5	Green	25	Dark Blue
10	Cyan	30	Dark Green

- 1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
- 2 Fixture is mounted 1'-0" above the illuminated surface.